

AtkoreTM

SCI

Product Catalog 2023



✧ ✧ **“WHO WE ARE AND WHAT WE DO”** ✧ ✧

Atkore, would like to take this opportunity to formally introduce ourselves.

We are an Electrical Fittings Manufacturer specializing in the manufacturing of a quality line of Steel and Malleable Iron Electrical Fittings.

In our effort to afford you, a competitive, quality line of specification grade, Steel and Malleable Iron Electrical Fittings, we would like to outline the following advantages associated with purchasing from Atkore:

- All products are USA designed and engineered by innovative American engineers and electrical designers with many years of experience designing electrical fittings for prominent USA electrical fittings manufacturers.
- All products are specification grade quality.
- Many of our products are patented, unique and labor saving.
- All products are both UL and CUL listed.
- All products are available in container load quantities; CIF USA duty paid, or can be purchased directly from our Hobart, IN Distribution Center.
- Quality is maintained on an ongoing basis at each production line in each of the factories by quality engineers assigned to each product category.

Competitive pricing, combined with quality product and an expansive product line, make Atkore Inc., a company you should consider aligning yourself with.

Production samples of any or all products are available upon request.

Please call us direct to discover how an association with Atkore, Inc. can prove to be mutually beneficial.

Very truly yours,

Ronald Greaves

Vice-President & General Manager

Corrosion Resistant Conduit and Conduit & Cable Fittings

Atkore Corporation

Table of Contents



EMT FITTINGS

I

RIGID FITTINGS

21

LIQUIDTIGHT FITTINGS

60

FLEX - AC - MC FITTINGS

85

CORD GRIP FITTINGS

98

CONDUIT BODIES


102

MISCELLANEOUS FITTINGS

135

INDEX

143

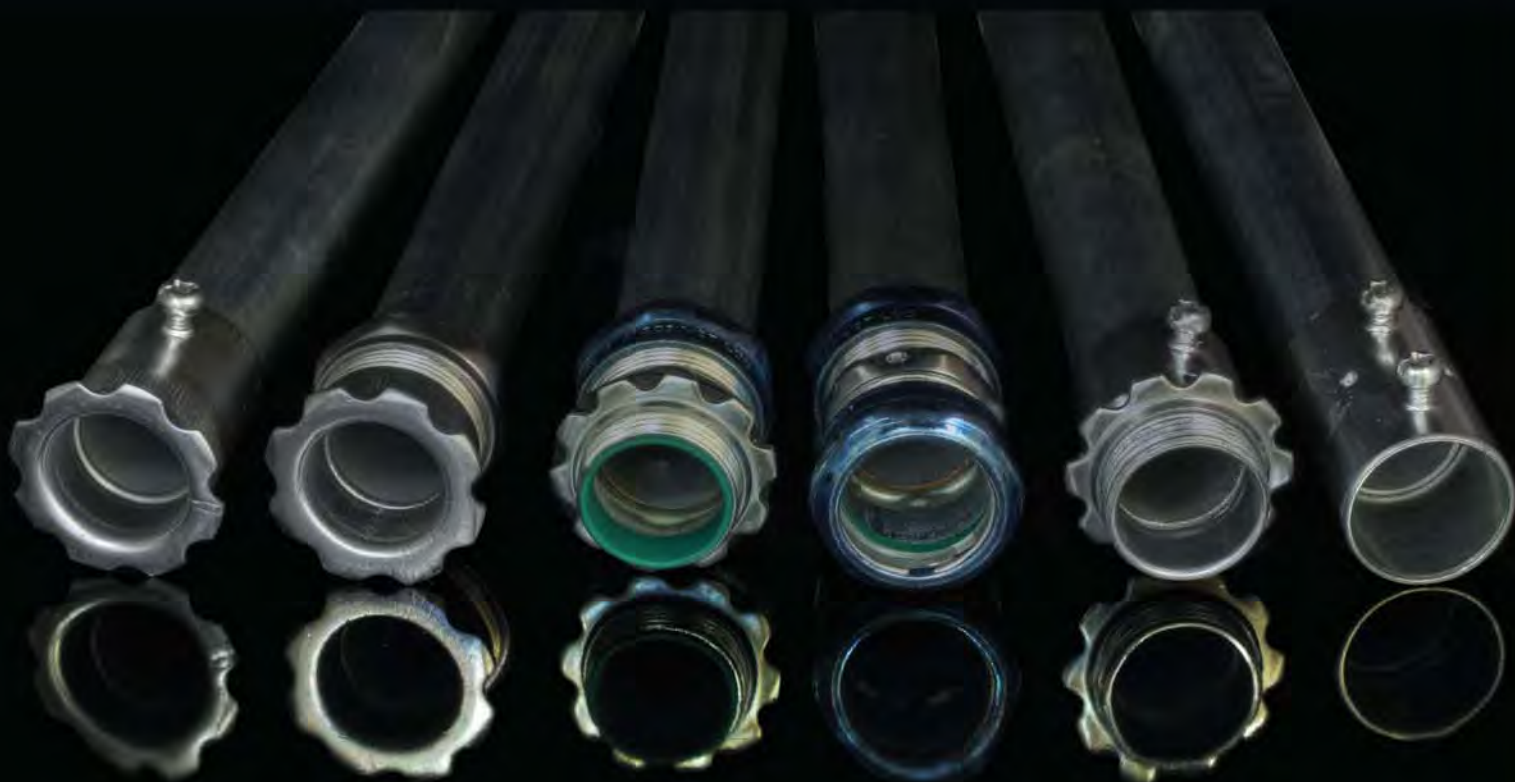

EMT FITTINGS:

Twistlock Connectors
Twistlock Outlet Boxes
Raintight Connectors and Couplings
Set Screw Connectors and Couplings
Compression Connectors and Couplings
Combination Couplings
Space Saver Connectors
Bendsaver Straps and Couplings

Steel Set Screw Connectors for Steel Conduit

Features:

- Pre-set & staked tri-head screws 1/2" thru 2". Hex head screws 2-1/2" thru 4"
- Male hub threads - NPSM
- Steel locknuts
- Heavy steel walls
- Concrete tight when taped
- UL listed for Steel EMT Conduit
- RoHS compliant


Standard Materials:
Steel

Standard Finish:
Zinc plated


Applicable Third Party
Standards:
UL Standard: 514B
Fed. Spec. W-F-408E
NEMA: FB-1

* Furnished with two set
screws

^ Indicates UL and CUL
Listed for EMT, IMC & Rigid
conduit

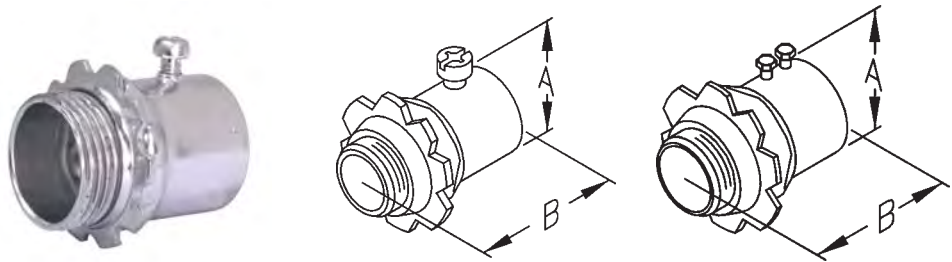

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
SC50R	1/2"	1/2"	7/8"	1-1/2"	304	8.6
SC75R	3/4"	3/4"	1-1/8"	1-9/16"	204	12.8
SC100R	1"	1"	1-3/8"	1-13/16"	120	20.2
SC125R	*1-1/4"	1-1/4"	1-3/4"	2-5/16"	80	35.6
SC150R	*1-1/2"	1-1/2"	2"	2-1/4"	54	45.1
SC200R	*2"	2"	2-7/16"	2-3/8"	42	63.6
^SC250R	*2-1/2"	2-1/2"	3-1/8"	3-3/16"	15	130.0
^SC300R	*3"	3"	3-3/4"	3-13/16"	14	140.0
^SC350R	*3-1/2"	3-1/2"	4-1/4"	4-5/16"	11	180.0
^SC400R	*4"	4"	4-3/4"	4-7/8"	7	225.0

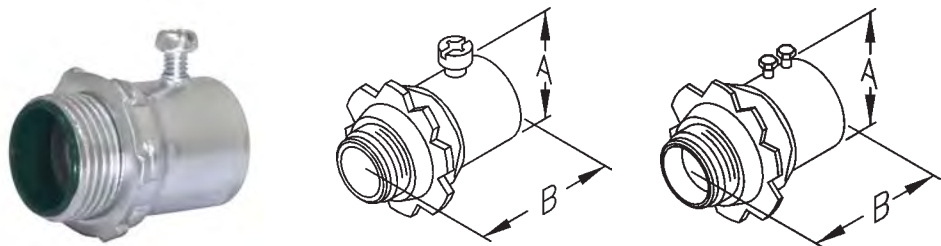

With Insulated Throat

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
SC50-ICR	1/2"	1/2"	7/8"	1-1/2"	304	8.7
SC75-ICR	3/4"	3/4"	1-1/8"	1-9/16"	204	12.9
SC100-ICR	1"	1"	1-3/8"	1-13/16"	120	20.4
SC125-ICR	*1-1/4"	1-1/4"	1-3/4"	2-1/4"	80	36.0
SC150-ICR	*1-1/2"	1-1/2"	2"	2-5/16"	54	45.6
SC200-ICR	*2"	2"	2-7/16"	2-3/8"	42	64.2
^SC250-ICR	*2-1/2"	2-1/2"	3-1/8"	3-3/16"	15	131.3
^SC300-ICR	*3"	3"	3-3/4"	3-13/16"	14	141.4
^SC350-ICR	*3-1/2"	3-1/2"	4-1/4"	4-5/16"	11	181.8
^SC400-ICR	*4"	4"	4-3/4"	4-7/8"	7	227.3



Steel Set Screw Couplings for Steel Conduit

Features:

- Pre-set & staked tri-head screws 1/2" thru 2". Hex head screws 2-1/2" thru 4"
- Heavy steel walls
- Concrete tight when taped
- UL listed for Steel EMT Conduit
- RoHS compliant



Standard Materials:
Steel

Standard Finish:
Zinc plated

Applicable Third Party Standards:
UL Standard: 514B
Fed. Spec. W-F-408E
NEMA: FB-1

* Furnished with four set screws

^ Indicates UL and CUL Listed for EMT, IMC and Rigid conduit.

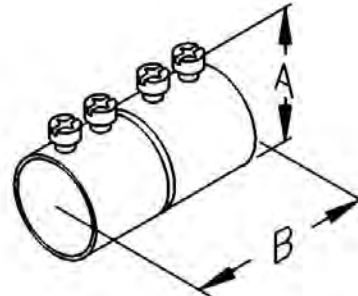

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
SK50R	1/2"	7/8"	1-5/8"	480	7.8
SK75R	3/4"	1-1/8"	1-7/8"	298	12.7
SK100R	1"	1-3/16"	2-5/16"	168	19.6
SK125R	*1-1/4"	1-3/4"	2-3/4"	96	40.2
SK150R	*1-1/2"	2"	3"	60	57.5
SK200R	*2"	2-7/16"	3-1/4"	40	64.6
^SK250R	*2-1/2"	3-1/8"	4"	12	130.0
^SK300R	*3"	3-3/4"	4-1/4"	10	140.0
^SK350R	*3-1/2"	4-1/4"	4-1/2"	8	216.6
^SK400R	*4"	4-3/4"	4-3/4"	5	250.0



EMT

Steel Set Screw Connectors UL Approved for Aluminum Conduit

Features:


- Pre-set & staked tri-head screws 1/2" thru 2". Hex head screws 2-1/2" thru 4"
- Male hub threads - NPSM
- Steel locknuts
- Heavy steel walls
- Concrete tight when taped
- UL listed for Aluminum EMT Conduit
- RoHS compliant

Standard Materials:
Steel


Standard Finish:
Zinc plated

Applicable Third Party
Standards:
UL Standard: 514B
Fed. Spec. W-F-408E
NEMA: FB-1

* Furnished with two set
screws

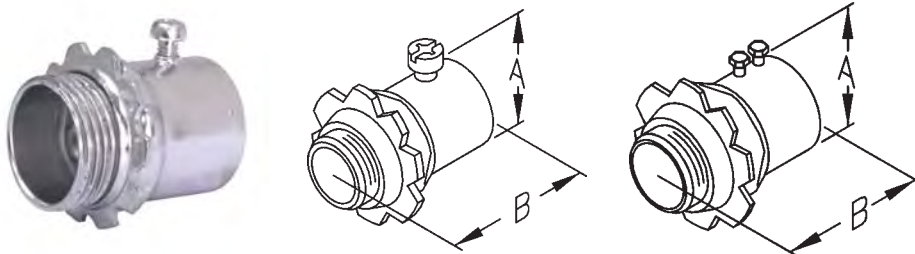

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
SC50A	1/2"	1/2"	7/8"	1-1/2"	304	8.6
SC75A	3/4"	3/4"	1-1/8"	1-9/16"	204	12.8
SC100A	1"	1"	1-3/8"	1-13/16"	120	20.2
SC125A	*1-1/4"	1-1/4"	1-3/4"	2-5/16"	80	35.6
SC150A	*1-1/2"	1-1/2"	2"	2-1/4"	54	45.1
SC200A	*2"	2"	2-7/16"	2-3/8"	42	63.6
SC250A	*2-1/2"	2-1/2"	3-1/8"	3-3/16"	15	130.0
SC300A	*3"	3"	3-3/4"	3-13/16"	14	140.0
SC350A	*3-1/2"	3-1/2"	4-1/4"	4-5/16"	11	180.0
SC400A	*4"	4"	4-3/4"	4-7/8"	7	225.0

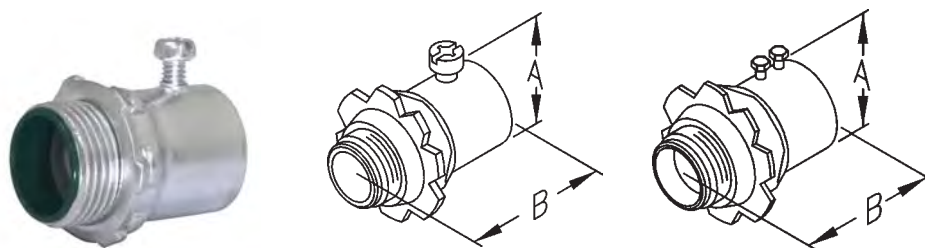

With Insulated Throat

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
SC50A-IC	1/2"	1/2"	7/8"	1-1/2"	304	8.7
SC75A-IC	3/4"	3/4"	1-1/8"	1-9/16"	204	12.9
SC100A-IC	1"	1"	1-3/8"	1-13/16"	120	20.4
SC125A-IC	*1-1/4"	1-1/4"	1-3/4"	2-1/4"	80	36.0
SC150A-IC	*1-1/2"	1-1/2"	2"	2-5/16"	54	45.6
SC200A-IC	*2"	2"	2-7/16"	2-3/8"	42	64.2
SC250A-IC	*2-1/2"	2-1/2"	3-1/8"	3-3/16"	15	131.3
SC300A-IC	*3"	3"	3-3/4"	3-13/16"	14	141.4
SC350A-IC	*3-1/2"	3-1/2"	4-1/4"	4-5/16"	11	181.8
SC400A-IC	*4"	4"	4-3/4"	4-7/8"	7	227.3



Steel Set Screw Couplings for Aluminum Conduit

Features:


- Pre-set & staked tri-head screws 1/2" thru 2". Hex head screws 2-1/2" thru 4"
- Heavy steel walls
- Concrete tight when taped
- UL listed for Aluminum EMT Conduit
- RoHS compliant

Standard Materials:
Steel

Standard Finish:
Zinc plated

Applicable Third Party Standards:
UL Standard: 514B
Fed. Spec. W-F-408E
NEMA: FB-1

* Furnished with four set screws

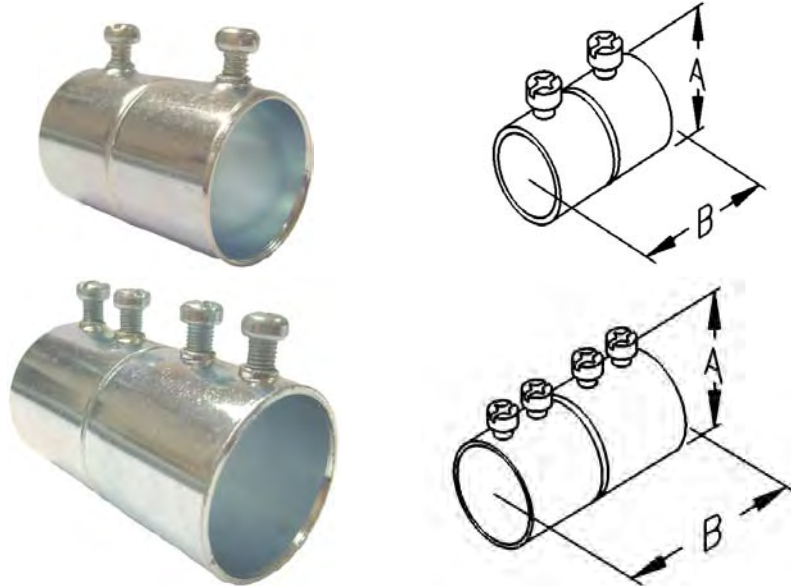

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
SK50A	1/2"	7/8"	1-5/8"	480	7.8
SK75A	3/4"	1-1/8"	1-7/8"	298	12.7
SK100A	1"	1-3/16"	2-5/16"	168	19.6
SK125A	*1-1/4"	1-3/4"	2-3/4"	96	40.2
SK150A	*1-1/2"	2"	3"	60	57.5
SK200A	*2"	2-7/16"	3-1/4"	40	64.6
SK250A	*2-1/2"	3-1/8"	4"	12	130.0
SK300A	*3"	3-3/4"	4-1/4"	10	140.0
SK350A	*3-1/2"	4-1/4"	4-1/2"	8	216.6
SK400A	*4"	4-3/4"	4-3/4"	5	250.0



EMT

Steel Compression Connectors for Steel and Aluminum Conduit


Features:

- Unique raised bump design affords fast, positive locking of compression nuts
- Male hub threads - NPSM
- Steel locknuts
- Heavy steel walls
- Concrete tight
- UL listed for Steel & Aluminum EMT Conduit
- RoHS compliant


Standard Materials:
Steel

Standard Finish:
Zinc plated

Applicable Third Party
Standards:
UL Standard: 514B
Fed. Spec. W-F-408E
NEMA: FB-1



CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
CC50R	1/2"	1/2"	5/8"	7/16"	1-1/8"	294	10.6
CC75R	3/4"	3/4"	1 1/16"	7/16"	1-3/8"	204	17.0
CC100R	1"	1"	1 1/16"	1/2"	1-1 1/16"	120	22.7
CC125R	1-1/4"	1-1/4"	1 5/16"	5/8"	2-1/16"	72	40.6
CC150R	1-1/2"	1-1/2"	1-1/16"	5/8"	2-1/4"	48	49.9
CC200R	2"	2"	1-1/8"	1 1/16"	2-3/4"	42	66.8
CC250R	2-1/2"	2-1/2"	1-1 1/16"	3/4"	3-5/8"	11	176.8
CC300R	3"	3"	1-1 1/16"	7/8"	4-1/4"	8	234.3
CC350R	3-1/2"	3-1/2"	1-13/16"	15/16"	4-1 1/16"	6	287.3
CC400R	4"	4"	1-13/16"	15/16"	5-3/16"	4	342.6



With Insulated Throat

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
CC50-ICR	1/2"	1/2"	5/8"	1/2"	1-1/8"	294	10.7
CC75-ICR	3/4"	3/4"	1 1/16"	1/2"	1-3/8"	204	17.1
CC100-ICR	1"	1"	1 1/16"	9/16"	1-1 1/16"	120	22.9
CC125-ICR	1-1/4"	1-1/4"	1 5/16"	1 1/16"	2-1/16"	72	41.0
CC150-ICR	1-1/2"	1-1/2"	1-1/16"	1 1/16"	2-1/4"	48	50.4
CC200-ICR	2"	2"	1-1/8"	3/4"	2-3/4"	42	67.4
CC250-ICR	2-1/2"	2-1/2"	1-1 1/16"	13/16"	3-5/8"	11	178.1
CC300-ICR	3"	3"	1-1 1/16"	15/16"	4-1/4"	8	235.7
CC350-ICR	3-1/2"	3-1/2"	1-13/16"	1"	4-1 1/16"	6	289.1
CC400-ICR	4"	4"	1-13/16"	1"	5-3/16"	4	344.9



EMT

Steel Compression Couplings for Steel and Aluminum Conduit

Features:

- Unique raised bump design affords fast, positive locking of compression nuts
- Heavy steel walls
- Concrete tight
- UL Listed for Steel and Aluminum EMT Conduit
- RoHS compliant

Standard Materials:

Steel

Standard Finish:

Zinc plated


Applicable Third Party

Standards:

UL Standard: 514B

Fed. Spec. W-F-408E

NEMA: FB-1



CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
CK50R	1/2"	1/2"	1-5/8"	1-1/8"	260	14.0
CK75R	3/4"	3/4"	1-3/4"	1-3/8"	180	21.3
CK100R	1"	1"	1-7/8"	1-11/16"	120	28.0
CK125R	1-1/4"	1-1/4"	2-1/4"	2-1/16"	72	48.5
CK150R	1-1/2"	1-1/2"	2-1/4"	2-1/4"	54	59.5
CK200R	2"	2"	2-3/8"	2-3/4"	42	78.9
CK250R	2-1/2"	2-1/2"	3-7/8"	3-5/8"	11	205.5
CK300R	3"	3"	4"	4-1/4"	8	263.0
CK350R	3-1/2"	3-1/2"	4-11/16"	4-11/16"	6	309.4
CK400R	4"	4"	4-15/16"	5-3/16"	4	393.4



Raintight Steel Compression Connectors

Features:

- The only steel compression fitting UL Listed Raintight
- Male hub threads - NPSM
- Steel locknuts
- Heavy steel walls
- Raintight
- Concrete tight
- Blue nut eases identification
- RoHS compliant
- Suitable for use outdoors

Standard Materials:


Steel
Neoprene Rubber
Nylon compression ring

Standard Finish:


Zinc plated

Applicable Third Party Standards:

UL Standard: 514B
Fed. Spec. W-F-408E
NEMA: FB-1



CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
CCR50	1/2"	1/2"	5/8"	7/16"	1-1/8"	266	10.6
CCR75	3/4"	3/4"	1 1/16"	7/16"	1-3/8"	180	17.0
CCR100	1"	1"	1 1/16"	1/2"	1-11/16"	120	22.7
CCR125	1-1/4"	1-1/4"	1 5/16"	5/8"	2-1/16"	72	40.6
CCR150	1-1/2"	1-1/2"	1-1/16"	5/8"	2-1/4"	58	49.9
CCR200	2"	2"	1-1/8"	1 1/16"	2-3/4"	36	66.8
CCR250	2-1/2"	2-1/2"	1-11/16"	3/4"	3-5/8"	11	176.8
CCR300	3"	3"	1-11/16"	7/8"	4-1/4"	8	234.3
CCR350	3-1/2"	3-1/2"	1-13/16"	15/16"	4-11/16"	6	287.3
CCR400	4"	4"	1-13/16"	15/16"	5-3/16"	4	342.6



With Insulated Throat

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
CCR50-IC	1/2"	1/2"	5/8"	1/2"	1-1/8"	266	10.7
CCR75-IC	3/4"	3/4"	1 1/16"	1/2"	1-3/8"	180	17.1
CCR100-IC	1"	1"	1 1/16"	9/16"	1-11/16"	120	22.9
CCR125-IC	1-1/4"	1-1/4"	1 5/16"	1 1/16"	2-1/16"	72	41.0
CCR150-IC	1-1/2"	1-1/2"	1-1/16"	1 1/16"	2-1/4"	58	50.4
CCR200-IC	2"	2"	1-1/8"	3/4"	2-3/4"	36	67.4
CCR250-IC	2-1/2"	2-1/2"	1-11/16"	13/16"	3-5/8"	11	178.1
CCR300-IC	3"	3"	1-11/16"	15/16"	4-1/4"	8	235.7
CCR350-IC	3-1/2"	3-1/2"	1-13/16"	1"	4-11/16"	6	289.1
CCR400-IC	4"	4"	1-13/16"	1"	5-3/16"	4	344.9

PATENTED
U.S. Patent No.
8.129.633B1



Raintight Steel Compression Couplings

Features:

- The only steel compression fitting, UL Listed Raintight
- Steel locknuts
- Heavy steel walls
- Raintight
- Concrete tight
- Blue nut eases identification
- RoHS compliant
- Suitable for use outdoors

Standard Materials:


Steel
Nylon compression ring

Standard Finish:

Zinc plated

Applicable Third Party

Standards:
UL Standard: 514B
Fed. Spec. W-F-408E
NEMA: FB-1



CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
CKR50	1/2"	1/2"	1-5/8"	1-1/8"	219	14.0
CKR75	3/4"	3/4"	1-3/4"	1-3/8"	168	21.3
CKR100	1"	1"	1-7/8"	1-11/16"	120	28.0
CKR125	1-1/4"	1-1/4"	2-1/4"	2-1/16"	66	48.5
CKR150	1-1/2"	1-1/2"	2-1/4"	2-1/4"	58	59.5
CKR200	2"	2"	2-3/8"	2-3/4"	33	78.9
CKR250	2-1/2"	2-1/2"	3-7/8"	3-5/8"	11	205.5
CKR300	3"	3"	4"	4-1/4"	8	263.0
CKR350	3-1/2"	3-1/2"	4-11/16"	4-11/16"	6	309.4
CKR400	4"	4"	4-15/16"	5-3/16"	4	393.4

PATENTED
U.S. Patent No.
8.129.633B1



Raintight Steel Compression Space Saver Connectors

Features:

- Affords additional wiring room in junction boxes and eliminates the need for costlier insulated throat fittings and/or conduit bushings.
- Excellent for low voltage applications
- Blue nut eases identification
- Heavy steel walls
- RoHS compliant
- Suitable for use outdoors

Standard Materials:

Steel

Nylon compression ring

Standard Finish:

Zinc Plated

Applicable Third Party

Standards:


UL Standard: 514B

Fed. Spec. W-F-408E

NEMA: FB-1

**Winner of the 2005
EC&M Product of
the Year
Competition!**


**PATENTED
U.S. Patent No.
8.129.633B1**



CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	WEIGHT PER C
CSSCR50	1/2"	1/2"	1-1/8"	1-3/8"	12.5
CSSCR75	3/4"	3/4"	1-3/8"	1-5/8"	17.5
CSSCR100	1"	1"	1-11/16"	1-13/16"	25.6



Wiring room using Space Saver
Steel Connectors.

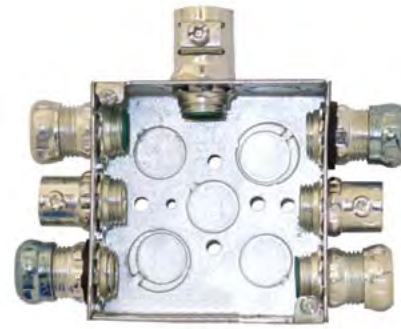

Wiring room using conventional
steel connectors.

Steel Set Screw Space Saver Connectors

Features:

- Affords additional wiring room in junction boxes and eliminates the need for costlier insulated throat fittings and/or conduit bushings
- Excellent for low voltage applications
- Pre-set & staked tri-head screws
- Heavy steel walls
- Concrete tight when taped
- RoHS compliant


Standard Materials:
Steel

Standard Finish:
Zinc plated

Applicable Third Party
Standards:
UL Standard: 514B
Fed. Spec. W-F-408E
NEMA: FB-1

**Winner of the 2005
EC&M Product of
the Year
Competition!**


**PATENT
PENDING**



CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
SSC-50	1/2"	1/2"	7/8"	1-3/16"	432	7.8
SSC-75	3/4"	3/4"	1-1/16"	1-1/2"	270	10.9
SSC-100	1"	1"	1-5/16"	1-5/8"	180	15.5



Wiring room using Space Saver steel connectors.

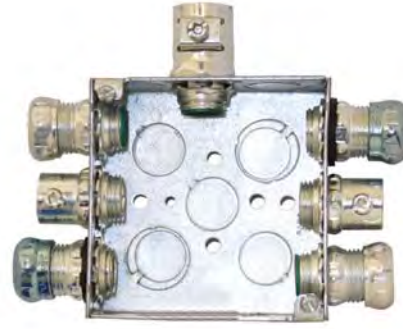

Wiring room using conventional steel connectors.

Die Cast Zinc Set Screw Space Saver Connectors

Features:

- Affords additional wiring room in junction boxes and eliminates the need for costlier insulated throat fittings and/or conduit bushings
- Excellent for low voltage applications
- Pre-set & staked tri-head screws
- Concrete tight when taped

Standard Materials:


Die cast zinc
Steel screw

Applicable Third Party Standards:


UL Standard: 514B
Fed. Spec. W-F-408E
NEMA: FB-1

**Winner of the 2005
EC&M Product of
the Year
Competition!**


**PATENT
PENDING**

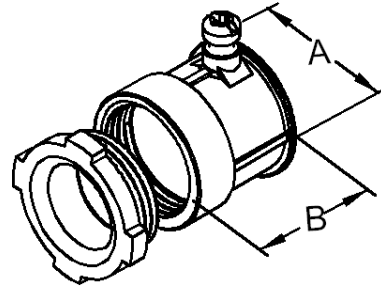

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	WEIGHT PER C
SSC-50DC	1/2"	1/2"	15/16"	7/8"	8.8
SSC-75DC	3/4"	3/4"	1-3/16"	1-1/8"	12.5

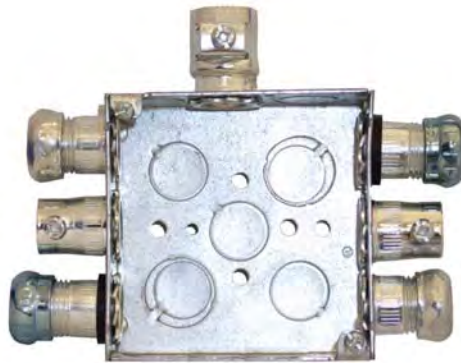

Wiring room using Space Saver steel connectors.

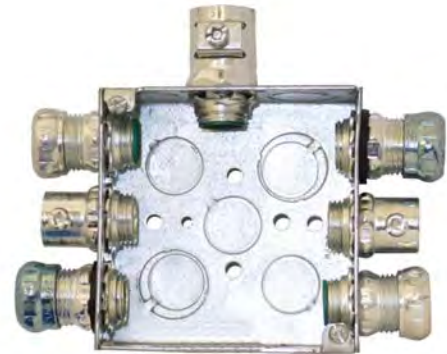

Wiring room using conventional steel connectors.

Steel Compression Space Saver Connectors

Features:

- Eliminates need to purchase insulated throat steel fittings or conduit bushings in 1/2", 3/4" & 1" trade sizes
- Affords additional wiring room in junction boxes (see illustrations)
- Excellent for low voltage applications
- Heavy steel walls
- Concrete tight when taped.
- RoHS compliant


Standard Materials:
Steel

Standard Finish:
Zinc plated

Applicable Third Party Standards:
UL Standard: 514B
Fed. Spec. W-F-408E
NEMA: FB-1

**Winner of the 2005
EC&M Product of
the Year
Competition!**


**PATENT
PENDING**



CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
CSSC-50	1/2"	1/2"	1-1/4"	1-1/8"	370	10.7
CSSC-75	3/4"	3/4"	1-7/16"	1-3/8"	250	15.6
CSSC-100	1"	1"	1-7/8"	1-11/16"	165	23.7



Wiring room using Space Saver Steel connectors.

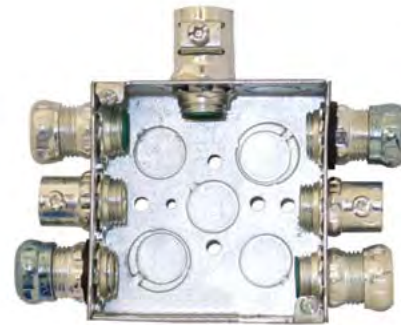

Wiring room using conventional steel connectors.

Steel Combination Couplings

Application:
To join EMT to Rigid or IMC.


Features:

- Pre-set & staked tri-head screws
- Heavy steel walls
- Concrete tight

Standard Materials:
Steel


Standard Finish:
Zinc plated

Applicable Third Party
Standards:
UL Standard: 514B
Fed. Spec. W-F-408E
NEMA: FB-1

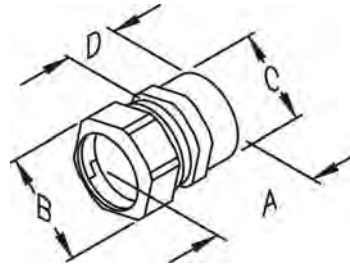

EMT Steel Compression to Threaded Rigid Couplings

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	DIM D	PCS/UNITS PER BOX	WEIGHT PER C
ERC50	1/2"	1-5/16"	1-1/8"	7/8"	11/16"	350	8.8
ERC75	3/4"	1-7/16"	1-3/8"	1-1/8"	3/4"	200	13.8
ERC100	1"	1-1/2"	1-11/16"	1-3/8"	13/16"	110	19.7



* Concrete tight when taped

EMT Steel Set Screw to Rigid Set Screw Couplings

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	DIM D	PCS/UNITS PER BOX	WEIGHT PER C
ERSS50	1/2"	1"	2-3/8"	7/8"	15/16"	250	13.8
ERSS75	3/4"	1-1/4"	2-13/16"	1-1/8"	1-1/8"	130	23.5
ERSS100	1"	1-1/2"	3"	1-3/8"	1-3/16"	100	33.4



Twistlock Set Screw Connectors

Features:

- No locknut required when used with SCI Twistlock outlet boxes
- Locks in place with just 1/4 turn
- Twistlock connectors help to speed up the installation time and afford additional wiring room in junction boxes
- Pre-set & staked tri-head screws

Standard Materials:

Steel
Die Cast zinc
Steel Screw


Standard Finish:

Zinc plated

Applicable Third Party Standards:


UL Standard: 514B
Fed. Spec. W-F-408E
NEMA: FB-1

PATENTED
U.S. Patent No.
6.476.319

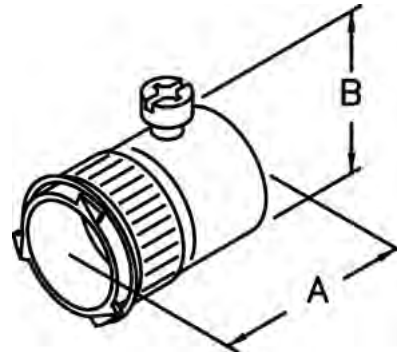

Steel Twistlock Set Screw Connectors

CATALOG SIZE	TRADE SIZE	KO SIZE	DIM A	DIM B	WEIGHT PER C
TL-50	1/2"	1/2"	1-1/8"	1-1/16"	8.2
TL-75	3/4"	3/4"	1-3/8"	1-5/16"	11.3



Die Cast Zinc Twistlock Set Screw Connect-

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	WEIGHT PER C
TL-50DC	1/2"	1/2"	1-1/16"	7/8"	6.3
TL-75DC	3/4"	3/4"	1-1/4"	1-1/8"	8.8



Twistlock box with a TL connector



Twistlock box with a regular EMT Set Screw connector

Twistlock Outlet Boxes

4" SQUARE OUTLET BOX


Features:

- No locknut required when used with SCI Twistlock connectors
- SCI no locknut Twistlock locks in place with just 1/4" turn
- Twistlock connectors and outlet boxes help speed up installation time
- Standard steel and die cast fittings can both be used in the Twistlock Box
- Heavy steel walls

Standard Materials:
Steel


Standard Finish:
Zinc plated

Applicable Third Party Standards:
UL Standard: 514A - applies to TLBI only

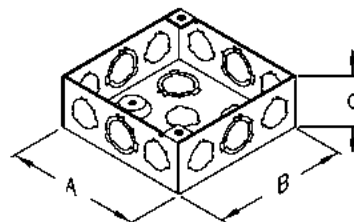

CATALOG NUMBER	1-1/2" DEEP CONDUIT KO's 24 CUBIC INCHES	KNOCKOUTS SIDES BOTTOM		DIM A	DIM B	DIM C	WEIGHT PER C
TLBI	1/2"	8	2	4"	4"	1-1/2"	65.6
	Combination 1/2" & 3/4"	4	2				

HANDY BOX



CATALOG NUMBER	1-5/8" DEEP CONDUIT KO's 13.8 CUBIC INCHES	KNOCKOUTS SIDES BOTTOM		DIM A	DIM B	DIM C	WEIGHT PER C
TLB2	Combination 1/2" & 3/4"	3	1	4"	2-1/8"	1-5/8"	

PATENTED
U.S. Patent No.
9.476.319



Bendsaver Conduit Straps and Die Cast Couplings

Application:

To allow securing of conduit to wall surfaces and route to junction box without requiring offset bending of conduit.

DOC-50 or DOC-75 installation requires one DOC-50 or DOC-75 and one OCS-50 or OCS-75.

Features:

- Standoff design eliminates conduit bending and provides automatic alignment with electrical box knockouts

Standard Materials:


OCS Series - Steel
DOC Series - Die cast Zinc

Standard Finish:


OCS Series - Zinc plated
DOC Series - Zinc die cast

Applicable Third Party

Standards:
UL Standard: 2239 & 514B
Fed. Spec. W-F-408E
NEMA: FB-1



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
OCS-50	1/2"	1-5/16"	13/16"	1-3/4"	500	7.5
OCS-75	3/4"	1-1/2"	13/16"	1-15/16"	350	8.8

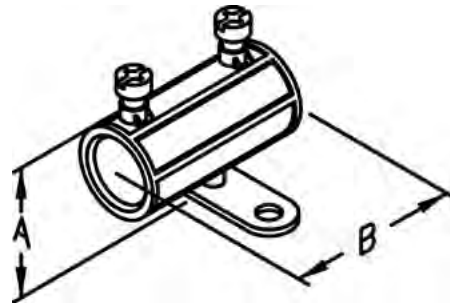


CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
DOC-50	1/2"	1-1/8"	1-5/8"	500	8.6
DOC-75	3/4"	1-3/8"	1-7/8"	300	13.8

**PATENT
PENDING**



Application:
To allow securing of conduit to wall surfaces and route to junction box without requiring offset bending of conduit.
DOC-50 or DOC-75 installation requires one DOC-50 or DOC-75 and one OCS-50 or OCS-75.

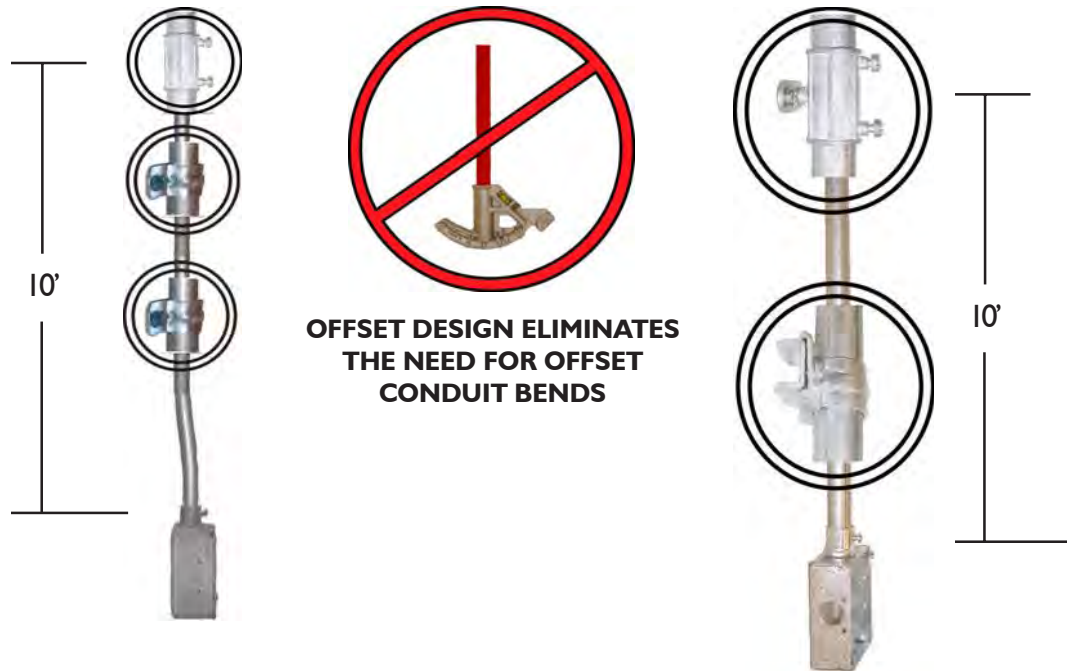


OLD WAY REQUIRES TWO STRAPS, ONE COUPLING AND TWO OFFSET BENDS

WITH NEW BENDSAVER FITTINGS, NO OFFSET BENDS ARE REQUIRED AND ONLY ONE STRAP AND ONE COUPLING ARE REQUIRED

PATENT PENDING



STEEL BENDSAVER STRAP



DIE CAST BENDSAVER COUPLING

NEVER OFFSET BEND 1/2" & 3/4" EMT CONDUIT WHEN RUNNING EMT TO A JUNCTION BOX. STAND OFF DESIGN ELIMINATES CONDUIT BENDING AND PROVIDES AUTOMATIC ALIGNMENT WITH ELECTRICAL BOX KNOCKOUTS.

EMT

One & Two-Hole Straps for EMT Conduit, Steel

Application:


One Hole Straps click on type for EMT conduit.

Two Hole Straps snap on type for EMT conduit where higher load bearing capacity is required.


Standard Materials:
Steel

Standard Finish:
Zinc plated

Applicable Third Party
Standards:
UL Standard: 2239

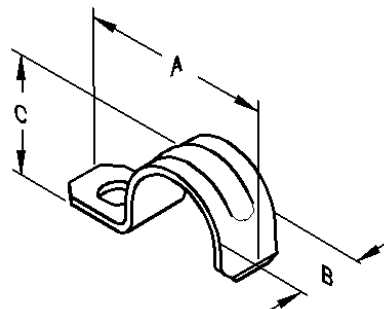

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
SE50-1	1/2"	1-3/4"	1 1/16"	9/16"	1000	2.0
SE75-1	3/4"	2"	1"	5/8"	1000	3.0
SE100-1	1"	2-3/16"	1-1/16"	3/4"	500	4.0
SE125-1	1-1/4"	2-7/8"	1-9/16"	7/8"	500	10.0
SE150-1	1-1/2"	3-1/8"	1-3/4"	1"	50	16.0
SE200-1	2"	3-7/8"	2-1/8"	1-1/8"	50	22.0
SE250-1	2-1/2"	4-15/16"	2-13/16"	1-1/4"	25	62.0
SE300-1	3"	5-9/16"	3-7/16"	1-1/4"	25	76.0
SE350-1	3-1/2"	6-1/4"	3-7/8"	1-1/4"	10	120.0
SE400-1	4"	6-13/16"	4-3/8"	1-1/4"	10	125.0



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
SE50-2	1/2"	2-3/16"	13/16"	9/16"	250	1.0
SE74-2	3/4"	2-11/16"	1"	5/8"	200	2.0
SE100-2	1"	3"	1-3/16"	1 1/16"	100	4.0
SE125-2	1-1/4"	3-5/8"	1-9/16"	3/4"	50	5.0
SE150-2	1-1/2"	4-1/4"	1-3/4"	7/8"	50	8.0
SE200-2	2"	4-3/4"	2-5/16"	1"	25	13.0
SE250-2	2-1/2"	6"	2-7/8"	1"	25	20.0
SE300-2	3"	6-7/16"	3-7/16"	1"	20	25.0
SE350-2	3-1/2"	7-5/16"	3-15/16"	1"	10	33.0
SE400-2	4"	7-7/8"	4-7/16"	1"	10	36.0

90° & 45° Set Screw Coupling Elbows


Features:

- Eliminates the use of couplings to save time and reduce overall cost
- Concrete tight when taped
- Pre-set & staked tri-head screws on all sizes

Standard Materials:
Steel

Standard Finish:
Zinc Plated

Applicable Third Party Standards:
UL Standard: 514B
UL Standard: 797

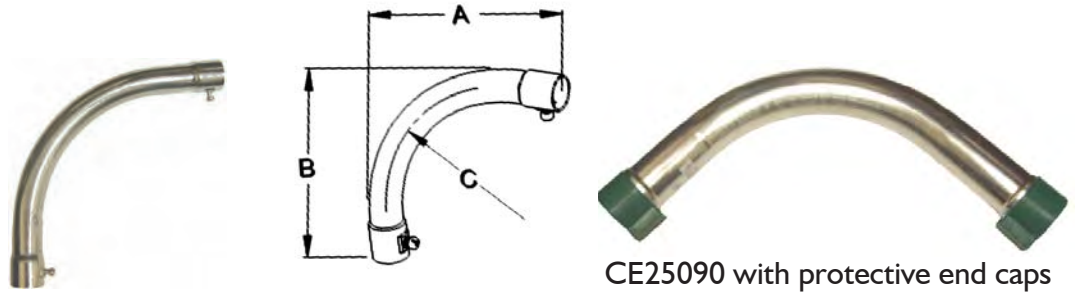

CE25090 with protective end caps

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
CE5090	1/2"	6-1/2"	6-1/2"	4-1/2"	50	28.1
CE7590	3/4"	7-1/4"	7-1/4"	5"	50	46.3
CE10090	1"	8-1/2"	8-1/2"	6-1/4"	20	78.1
CE12590	1-1/4"	11-1/4"	11-1/4"	7-3/4"	20	150.0
CE15090	1-1/2"	12"	12"	9-1/4"	15	184.4
CE20090	2"	14-1/4"	14-1/4"	10-3/8"	10	250.0
* CE25090	2-1/2"	18-1/2"	18-1/2"	11-1/4"	-	526.2
* CE30090	3"	21"	21"	13-1/4"	-	738.6
* CE35090	3-1/2"	24-1/2"	24-1/2"	15-3/4"	-	1086.2
* CE40090	4"	25-1/4"	25-1/4"	17"	-	

* Supplied with plastic protective end caps



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
CE5045	1/2"	7"	4"	50	20.6
CE7545	3/4"	8-3/4"	4-1/2"	50	36.3
CE10045	1"	10"	5-3/4"	20	59.4
CE12545	1-1/4"	11-1/2"	7-1/4"	20	100.0
CE15045	1-1/2"	14-3/4"	8-1/4"	15	153.1
CE20045	2"	15"	9-1/2"	10	181.3
* CE25045	2-1/2"	18-3/4"	10-1/2"	-	381.8
* CE30045	3"	21-5/16"	13-1/16"	-	517.7
* CE35045	3-1/2"	24-7/8"	15-1/16"	-	741.2
* CE40045	4"	29"	16-1/16"	-	873.9

* Supplied with plastic protective end caps




90° & 45° Elbows


Standard Materials:
Steel

Standard /finish:
Zinc Plated

Applicable Third Party
Standards:
UL Standard: 797



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
CEP5090	1/2"	6-3/8"	6-3/8"	4-1/4"	50	26.5
CEP7590	3/4"	7-1/2"	7-1/2"	4-1/2"	50	48.5
CEP10090	1"	9-1/2"	9-1/2"	6"	20	88.2
CEP12590	1-1/4"	11-1/4"	11-1/4"	8"	20	154.3
CEP15090	1-1/2"	13"	13"	9-1/8"	15	198.4
CEP20090	2"	16"	16"	11-1/2"	10	286.6
CEP25090	2-1/2"	18-1/2"	18-1/2"	11-3/4"	-	485.0
CEP30090	3"	22-1/4"	22-1/4"	14-1/4"	-	683.4
CEP35090	3-1/2"	25"	25"	17"	-	1014.1
CEP40090	4"	26"	26"	18-1/4"	-	1322.8



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
CEP5045	1/2"	6-9/16"	4.0"	50	17.6
CEP7545	3/4"	7-1/8"	4-1/2"	50	33.1
CEP10045	1"	8-9/16"	5-3/4"	20	63.9
CEP12545	1-1/4"	10-3/4"	7-1/4"	20	86.0
CEP15045	1-1/2"	11-1/2"	8-1/4"	15	123.5
CEP20045	2"	12-7/16"	9-1/2"	10	187.4
CEP25045	2-1/2"	13-9/16"	10-1/2"	-	396.8
CEP30045	3"	15-3/4"	13"	-	551.2
CEP35045	3-1/2"	17-1/2"	15"	-	815.7
CEP40045	4"	18-1/2"	16"	-	948.0





RIGID FITTINGS:

Reducing Bushings
J-Clamps
FS & FD Cast Device Boxes
Cord Connectors
Conduit and Grounding Bushings
Rigid Connectors and Couplings
Three Piece Couplings
Straps and Clampbacks
Conduit Hubs
Nipples
Pull Elbows
Right Angle, Parallel, Edge Type Clamps

RIGID - IMC

Malleable Iron Insulated Conduit Bushings 150° for Threaded Rigid Conduit and IMC

Features:

- The plastic liner won't chip, crack, swell or shrink. It resists corrosion, chemicals and temperature extremes.

Standard Materials:


Body - Malleable iron
Insuliner - ULTEM1000
rated at 150° C

Standard Finish:


Body - Zinc plated

Applicable Third Party Standards:

UL Standard: 514B
Fed. Spec. W-F-408E
NEMA: FB-1



CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
BRC-50	1/2"	1/2"	1-1/16"	11/16"	800	5.5
BRC-75	3/4"	3/4"	1-1/4"	11/16"	500	8.8
BRC-100	1"	1"	1-5/8"	3/4"	340	13.2
BRC-125	1-1/4"	1-1/4"	2"	13/16"	260	16.5
BRC-150	1-1/2"	1-1/2"	2-5/16"	13/16"	160	20.9
BRC-200	2"	2"	2-3/4"	7/8"	120	25.4
BRC-250	2-1/2"	2-1/2"	3-5/16"	1"	72	50.7
BRC-300	3"	3"	4"	1"	44	66.1
BRC-350	3-1/2"	3-1/2"	4-3/8"	1-1/16"	42	71.7
BRC-400	4"	4"	5-1/16"	1-1/8"	24	102.5
BRC-500	5"	5"	6-1/8"	1-3/16"	18	146.6
BRC-600	6"	6"	7-3/16"	1-3/16"	14	184.1



Malleable Iron Non-Insulated Conduit Bushings for Threaded Rigid Conduit and IMC

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
BRCN-50	1/2"	1/2"	1-1/16"	5/8"	800	5.5
BRCN-75	3/4"	3/4"	1-1/4"	5/8"	500	8.7
BRCN-100	1"	1"	1-5/8"	11/16"	340	13.1
BRCN-125	1-1/4"	1-1/4"	2"	3/4"	260	16.4
BRCN-150	1-1/2"	1-1/2"	2-5/16"	13/16"	160	20.7
BRCN-200	2"	2"	2-3/4"	7/8"	120	25.2
BRCN-250	2-1/2"	2-1/2"	3-5/16"	1"	72	50.3
BRCN-300	3"	3"	4"	1"	44	65.6
BRCN-350	3-1/2"	3-1/2"	4-3/8"	1-1/16"	42	71.2
BRCN-400	4"	4"	5-1/16"	1-1/8"	24	101.7
BRCN-500	5"	5"	6-1/8"	1-3/16"	18	145.5
BRCN-600	6"	6"	7-3/16"	1-3/16"	14	182.7

PATENTED
U.S. Patent No.
6.808.181



RIGID - IMC

Malleable Iron Insulated Grounding Bushings 150° with Aluminum Lugs for Threaded Rigid Conduit and IMC

Features:

- The plastic liner won't chip, crack, swell or shrink. It resists corrosion, chemicals and temperature extremes.
- One set screw provided with each fitting locks bushing in any desired position
- UL Listed for use with copper or aluminum

Standard Materials:

Body - Malleable iron
Lug - Aluminum
Insuliner - ULTEM1000 rated at 150° C
Clamping screw - Steel
Set screw - Steel


Standard Finish:

Body - Zinc plated
Lug - Zinc plated
Clamping Screw - Zinc plated

Applicable Third Party

Standards:
UL Standard: 467
UL Standard: 514B
Fed. Spec. W-F-408E
NEMA: FB-1

PATENTED
U.S. Patent No.
6.808.181



CATALOG NUMBER	TRADE SIZE	KO SIZE	LUG SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
BRC-50-1A	1/2"	1/2"	4-14	1-1/16"	1 1/16"	800	7.4
BRC-75-1A	3/4"	3/4"	4-14	1-1/4"	1 1/16"	500	10.7
BRC-100-1A	1"	1"	4-14	1-5/8"	3/4"	340	15.1
BRC-125-1A	1-1/4"	1-1/4"	4-14	2"	13/16"	260	18.4
BRC-125-2A	1-1/4"	1-1/4"	1/0-8	2"	13/16"	260	23.1
BRC-150-1A	1-1/2"	1-1/2"	4-14	2-5/16"	13/16"	160	22.8
BRC-150-2A	1-1/2"	1-1/2"	1/0-8	2-5/16"	13/16"	160	27.5
BRC-200-1A	2"	2"	4-14	2-3/4"	7/8"	120	27.3
BRC-200-2A	2"	2"	1/0-8	2-3/4"	7/8"	120	32.0
BRC-250-2A	2-1/2"	2-1/2"	1/0-8	3-5/16"	1"	72	57.3
BRC-250-3A	2-1/2"	2-1/2"	3/0-6	3-5/16"	1"	72	67.1
BRC-250-4A	2-1/2"	2-1/2"	250MCM-6	3-5/16"	1"	72	69.5
BRC-300-2A	3"	3"	1/0-8	4"	1"	44	72.7
BRC-300-3A	3"	3"	3/0-6	4"	1"	44	82.5
BRC-300-4A	3"	3"	250MCM-6	4"	1"	44	84.9
BRC-350-3A	3-1/2"	3-1/2"	3/0-6	4-3/8"	1-1/16"	42	88.1
BRC-350-4A	3-1/2"	3-1/2"	250MCM-6	4-3/8"	1-1/16"	42	89.9
BRC-400-3A	4"	4"	3/0-6	5-1/16"	1-1/8"	24	118.9
BRC-400-4A	4"	4"	250MCM-6	5-1/16"	1-1/8"	24	121.3
BRC-500-3A	5"	5"	3/0-6	6-1/8"	1-3/16"	18	163.0
BRC-500-4A	5"	5"	250MCM-6	6-1/8"	1-3/16"	18	165.4
BRC-600-3A	6"	6"	3/0-6	7-3/16"	1-3/16"	14	200.5
BRC-600-4A	6"	6"	250MCM-6	7-3/16"	1-3/16"	14	202.9

RIGID - IMC

Malleable Iron Insulated Grounding Bushings 150° with Copper Lugs for Threaded Rigid Conduit and IMC

Features:

- The plastic liner won't chip, crack, swell or shrink. It resists corrosion, chemicals and temperature extremes.
- One set screw provided with each fitting locks bushing in any desired position
- UL Listed for use with copper or aluminum

Standard Materials:

Body - Malleable iron
Lug - Copper
Insuliner - ULTEM1000 rated at 150° C
Clamping screw - Steel
Set screw - Steel


Standard Finish:

Body - Zinc plated
Lug - Zinc plated
Set Screw - Zinc plated

Applicable Third Party Standards:

UL Standard: 467
UL Standard: 514B
Fed. Spec. W-F-408E
NEMA: FB-1

PATENTED
U.S. Patent No.
6.808.181



CATALOG NUMBER	TRADE SIZE	KO SIZE	LUG SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
BRC-50-1C	1/2"	1/2"	4-14	1-1/16"	11/16"	800	9.9
BRC-75-1C	3/4"	3/4"	4-14	1-1/4"	11/16"	500	13.2
BRC-100-1C	1"	1"	4-14	1-5/8"	3/4"	340	17.6
BRC-125-1C	1-1/4"	1-1/4"	4-14	2"	13/16"	260	20.9
BRC-125-2C	1-1/4"	1-1/4"	1/0-8	2"	13/16"	260	32.4
BRC-150-1C	1-1/2"	1-1/2"	4-14	2-5/16"	13/16"	160	25.3
BRC-150-2C	1-1/2"	1-1/2"	1/0-8	2-5/16"	13/16"	160	36.8
BRC-200-1C	2"	2"	4-14	2-3/4"	7/8"	120	29.8
BRC-200-2C	2"	2"	1/0-8	2-3/4"	7/8"	120	41.3
BRC-250-2C	2-1/2"	2-1/2"	1/0-8	3-5/16"	1"	72	66.5
BRC-250-3C	2-1/2"	2-1/2"	3/0-6	3-5/16"	1"	72	90.7
BRC-250-4C	2-1/2"	2-1/2"	250MCM-6	3-5/16"	1"	72	101.0
BRC-300-2C	3"	3"	1/0-8	4"	1"	44	82.0
BRC-300-3C	3"	3"	3/0-6	4"	1"	44	106.1
BRC-300-4C	3"	3"	250MCM-6	4"	1"	44	116.4
BRC-350-3C	3-1/2"	3-1/2"	3/0-6	4-3/8"	1-1/16"	42	111.7
BRC-350-4C	3-1/2"	3-1/2"	250MCM-6	4-3/8"	1-1/16"	42	121.0
BRC-400-3C	4"	4"	3/0-6	5-1/16"	1-1/8"	24	142.5
BRC-400-4C	4"	4"	250MCM-6	5-1/16"	1-1/8"	24	152.8
BRC-500-3C	5"	5"	3/0-6	6-1/8"	1-3/16"	18	186.6
BRC-500-4C	5"	5"	250MCM-6	6-1/8"	1-3/16"	18	196.9
BRC-600-3C	6"	6"	3/0-6	7-3/16"	1-3/16"	14	224.1
BRC-600-4C	6"	6"	250MCM-6	7-3/16"	1-3/16"	14	234.4

RIGID - IMC

Malleable Iron Insulated Conduit Bushings 150° for Threadless Rigid Conduit and IMC

Features:

- The plastic liner won't chip, crack, swell or shrink. It resists corrosion, chemicals and temperature extremes.
- Three set screws provided with each fitting locks bushing in any desired

Standard Materials:

Body - Malleable iron
Insuliner - ULTEM1000
rated at 150° C
Set screws - Steel


Standard Finish:

Body - Zinc plated


Applicable Third Party

Standards:

UL Standard: 467
UL Standard: 514B
Fed. Spec. W-F-408E
NEMA: FB-1



CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
BRC-50S	1/2"	1/2"	1-1/16"	1 1/16"	800	5.5
BRC-75S	3/4"	3/4"	1-1/4"	1 1/16"	500	8.8
BRC-100S	1"	1"	1-5/8"	3/4"	340	13.2
BRC-125S	1-1/4"	1-1/4"	2"	13/16"	260	16.5
BRC-150S	1-1/2"	1-1/2"	2-5/16"	13/16"	160	20.9
BRC-200S	2"	2"	2-3/4"	7/8"	120	25.4
BRC-250S	2-1/2"	2-1/2"	3-5/16"	1"	72	50.7
BRC-300S	3"	3"	4"	1"	44	66.1
BRC-350S	3-1/2"	3-1/2"	4-3/8"	1-1/16"	42	71.7
BRC-400S	4"	4"	5-1/16"	1-1/8"	24	102.5
BRC-500S	5"	5"	6-1/8"	1-3/16"	18	146.6
BRC-600S	6"	6"	7-3/16"	1-3/16"	14	184.1



Malleable Iron Non-Insulated Conduit Bushings for Threadless Rigid Conduit and IMC

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
BRCN-50S	1/2"	1/2"	1-1/16"	5/8"	800	5.5
BRCN-75S	3/4"	3/4"	1-1/4"	5/8"	500	8.7
BRCN-100S	1"	1"	1-5/8"	1 1/16"	340	13.1
BRCN-125S	1-1/4"	1-1/4"	2"	3/4"	260	16.4
BRCN-150S	1-1/2"	1-1/2"	2-5/16"	13/16"	160	20.9
BRCN-200S	2"	2"	2-3/4"	7/8"	120	25.4
BRCN-250S	2-1/2"	2-1/2"	3-5/16"	1"	72	50.7
BRCN-300S	3"	3"	4"	1"	44	66.1
BRCN-350S	3-1/2"	3-1/2"	4-3/8"	1-1/16"	42	71.7
BRCN-400S	4"	4"	5-1/16"	1-1/8"	24	102.5
BRCN-500S	5"	5"	6-1/8"	1-3/16"	18	146.6
BRCN-600S	6"	6"	7-3/16"	1-3/16"	14	184.1

PATENTED
U.S. Patent No.
6.808.181



RIGID - IMC

Malleable Iron Insulated Grounding Bushings 150° with Aluminum Lugs for Threadless Rigid Conduit and IMC

Features:

- The plastic liner won't chip, crack, swell or shrink. It resists corrosion, chemicals and temperature extremes.
- Two set screws provided with each fitting locks bushing in any desired position
- UL Listed for use with copper or aluminum

Standard Materials:

Body - Malleable iron
Lug - Aluminum
Insuliner - ULTEM1000 rated at 150° C
Clamping screw - Steel
Set screw - Steel


Standard Finish:

Body - Zinc plated
Lug - Zinc plated

Applicable Third Party

Standards:
UL Standard: 467
UL Standard: 514B
Fed. Spec. W-F-408E
NEMA: FB-1

PATENTED
U.S. Patent No.
6.808.181



CATALOG NUMBER	TRADE SIZE	KO SIZE	LUG SIZE	DIM A	DIM B	PCS/UNITS PR BOX	WEIGHT PER C
BRC-50S-1A	1/2"	1/2"	4-14	1-1/16"	11/16"	800	7.4
BRC-75S-1A	3/4"	3/4"	4-14	1-1/4"	11/16"	500	10.7
BRC-100S-1A	1"	1"	4-14	1-5/8"	3/4"	340	15.1
BRC-125S-1A	1-1/4"	1-1/4"	4-14	2"	13/16"	260	18.4
BRC-125S-2A	1-1/4"	1-1/4"	1/0-8	2"	13/16"	260	23.1
BRC-150S-1A	1-1/2"	1-1/2"	4-14	2-5/16"	13/16"	160	22.8
BRC-150S-2A	1-1/2"	1-1/2"	1/0-8	2-5/16"	13/16"	160	27.5
BRC-200S-1A	2"	2"	4-14	2-3/4"	7/8"	120	27.3
BRC-200S-2A	2"	2"	1/0-8	2-3/4"	7/8"	120	32.0
BRC-250S-2A	2-1/2"	2-1/2"	1/0-8	3-5/16"	1"	72	57.3
BRC-250S-3A	2-1/2"	2-1/2"	3/0-6	3-5/16"	1"	72	67.1
BRC-250S-4A	2-1/2"	2-1/2"	250MCM-6	3-5/16"	1"	72	69.5
BRC-300S-2A	3"	3"	1/0-8	4"	1"	44	72.7
BRC-300S-3A	3"	3"	3/0-6	4"	1"	44	82.5
BRC-300S-4A	3"	3"	250MCM-6	4"	1"	44	84.9
BRC-350S-3A	3-1/2"	3-1/2"	3/0-6	4-3/8"	1-1/16"	42	88.1
BRC-350S-4A	3-1/2"	3-1/2"	250MCM-6	4-3/8"	1-1/16"	42	89.9
BRC-400S-3A	4"	4"	3/0-6	5-1/16"	1-1/8"	24	118.9
BRC-400S-4A	4"	4"	250MCM-6	5-1/16"	1-1/8"	24	121.3
BRC-500S-3A	5"	5"	3/0-6	6-1/8"	1-3/16"	18	163.0
BRC-500S-4A	5"	5"	250MCM-6	6-1/8"	1-3/16"	18	165.4
BRC-600S-3A	6"	6"	3/0-6	7-3/16"	1-3/16"	14	200.5
BRC-600S-4A	6"	6"	250MCM-6	7-3/16"	1-3/16"	14	202.9

RIGID - IMC

Malleable Iron Insulated Grounding Bushings 150° with Copper Lugs

Features:

- The plastic liner won't chip, crack, swell or shrink. It resists corrosion, chemicals and temperature extremes.
- Two set screws provided with each fitting locks bushing in any desired position
- UL Listed for use with copper or aluminum

Standard Materials:

Body - Malleable iron
Lug - Copper
Insuliner - ULTEM1000 rated at 150 °C
Clamping screw - Steel
Set screw - Steel

Standard Finish:


Body - Zinc plated

Applicable Third Party

Standards:

UL Standard: 467
UL Standard: 514B
Fed. Spec. W-F-408E
NEMA: FB-1

PATENTED
U.S. Patent No.
6.808.181



CATALOG NUMBER	TRADE SIZE	KO SIZE	LUG SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
BRC-50S-1C	1/2"	1/2"	4-14	1-1/16"	11/16"	800	9.9
BRC-75S-1C	3/4"	3/4"	4-14	1-1/4"	11/16"	500	13.2
BRC-100S-1C	1"	1"	4-14	1-5/8"	3/4"	340	17.6
BRC-125S-1C	1-1/4"	1-1/4"	4-14	2"	13/16"	260	20.9
BRC-125S-2C	1-1/4"	1-1/4"	1/0-8	2"	13/16"	260	32.4
BRC-150S-1C	1-1/2"	1-1/2"	4-14	2-5/16"	13/16"	160	25.3
BRC-150S-2C	1-1/2"	1-1/2"	1/0-8	2-5/16"	13/16"	160	36.8
BRC-200S-1C	2"	2"	4-14	2-3/4"	7/8"	120	29.8
BRC-200S-2C	2"	2"	1/0-8	2-3/4"	7/8"	120	41.3
BRC-250S-2C	2-1/2"	2-1/2"	1/0-8	3-5/16"	1"	72	66.5
BRC-250S-3C	2-1/2"	2-1/2"	3/0-6	3-5/16"	1"	72	90.7
BRC-250S-4C	2-1/2"	2-1/2"	250MCM-6	3-5/16"	1"	72	101.0
BRC-300S-2C	3"	3"	1/0-8	4"	1"	44	82.0
BRC-300S-3C	3"	3"	3/0-6	4"	1"	44	106.1
BRC-300S-4C	3"	3"	250MCM-6	4"	1"	44	116.4
BRC-350S-3C	3-1/2"	3-1/2"	3/0-6	4-3/8"	1-1/16"	42	111.7
BRC-350S-4C	3-1/2"	3-1/2"	250MCM-6	4-3/8"	1-1/16"	42	122.0
BRC-400S-3C	4"	4"	3/0-6	5-1/16"	1-1/8"	24	142.5
BRC-400S-4C	4"	4"	250MCM-6	5-1/16"	1-1/8"	24	152.8
BRC-500S-3C	5"	5"	3/0-6	6-1/8"	1-3/16"	18	186.6
BRC-500S-4C	5"	5"	250MCM-6	6-1/8"	1-3/16"	18	196.9
BRC-600S-3C	6"	6"	3/0-6	7-3/16"	1-3/16"	14	224.1
BRC-600S-4C	6"	6"	250MCM-6	7-3/16"	1-3/16"	14	234.4

RIGID - IMC

Steel Bushing For Rigid Conduit and IMC

Application:

- SCI's Steel Conduit bushings eliminates the use of the locknut and solves the problem of not enough thread left to engage the bushing after installing the locknut.

Features:



- The plastic liner won't chip, crack, swell or shrink. It resists corrosion, chemicals and temperature extremes
- RoHS compliant

Standard Materials:


Body - Steel
Insuliner - ULTEM1000 rated at 150° C

Standard Finish:

Body - Zinc plated

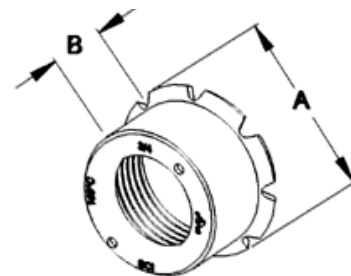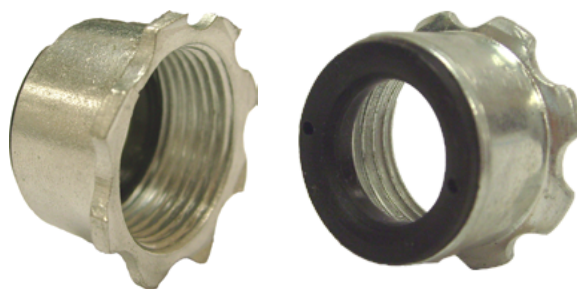

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
BRC-50ST	1/2"	1/2"	1-1/8"	5/8"	50	3.0
BRC-75ST	3/4"	3/4"	1-7/16"	11/16"	50	5.4
BRC-100ST	1"	1"	1-3/4"	13/16"	50	9.2

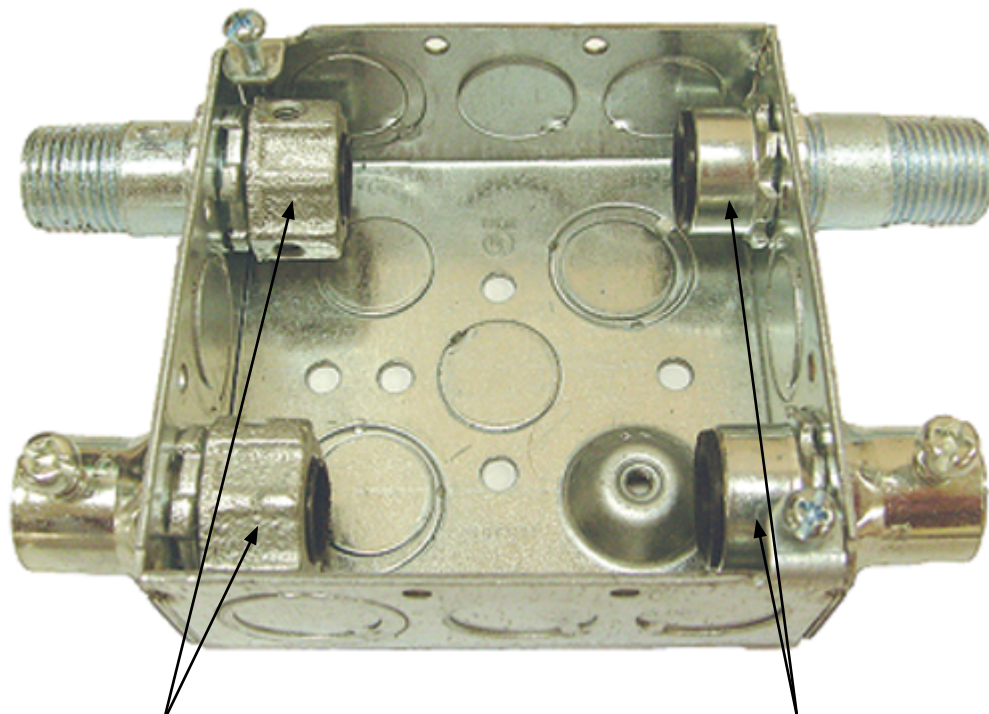

Using locknuts and existing bushings to secure fittings to a box

Using the BRCxxST eliminates locknuts and provides for more wiring space within the box

PATENTED



RIGID - IMC FITTINGS

RIGID - IMC

Three Piece Couplings for Rigid Conduit and IMC Malleable Iron

Features:

- Heavy duty casting
- Concrete tight
- Couples conduits when conduit cannot be turned.
- RoHS compliant

Standard Materials:
Malleable iron


Standard Finish:
Zinc plated

Applicable Third Party
Standards:

UL Standard: 514B

Fed. Spec. W-F-408E

NEMA: FB-1

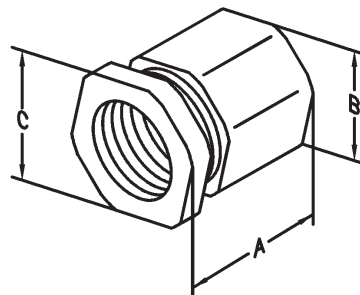

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
EC50	1/2"	1-5/16"	1-3/8"	1-3/8"	120	23.5
EC75	3/4"	1-9/16"	1-9/16"	1-9/16"	100	32.8
EC100	1"	1-5/8"	1-7/8"	1-7/8"	75	44.9
EC125	1-1/4"	2-1/8"	2-3/8"	2-3/8"	50	77.5
EC150	1-1/2"	2-3/8"	2-13/16"	2-13/16"	25	111.5
EC200	2"	2-5/8"	3-5/16"	3-5/16"	20	163.5
EC250	2-1/2"	3-1/8"	4-1/16"	4-1/16"	10	316.8
EC300	3"	3-3/16"	4-11/16"	4-11/16"	10	320.7
EC350	3-1/2"	3-9/16"	5-1/16"	5-1/16"	6	456.1
EC400	4"	4"	5-3/4"	5-3/4"	6	650.8
EC500	5"	4"	7-1/4"	7-1/4"	1	1079.0
EC600	6"	3-7/8"	8-5/16"	8-5/16"	1	1430.8



RIGID - IMC

Split Couplings for Threaded Rigid Conduit and IMC Malleable Iron

Features:

- Use where conduit runs are closely spaced
- Use when conduit is tight against a wall, ceiling or other obstruction
- Neoprene gasket provides a concrete tight seal
- Concrete tight

Standard Materials:

Malleable iron

Standard Finish:


Zinc plated

Applicable Third Party Standards:

UL Standard: 514B
NEMA: FB-1

1/2" and 3/4" furnished with one bolt

1" through 6" furnished with two bolts

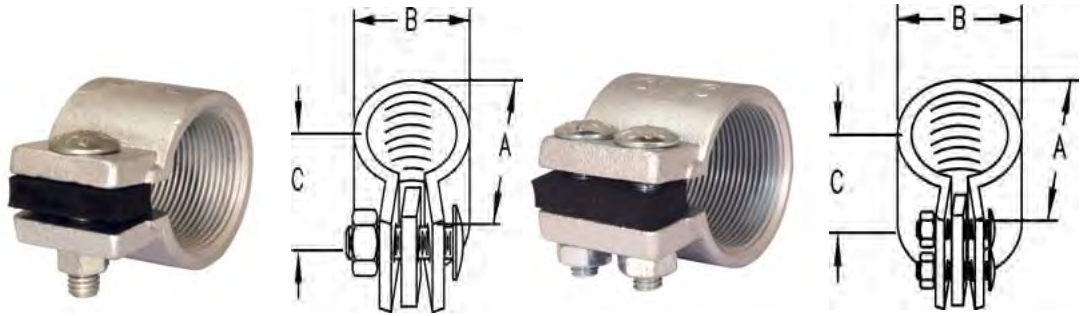

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
STC50	1/2"	2"	1-1/4"	1-1/4"	10	34.4
STC75	3/4"	2-5/16"	1-1/4"	1-1/2"	10	39.4
STC100	1"	2-5/8"	1-5/8"	1-13/16"	10	60.0
STC125	1-1/4"	3-1/16"	1-5/8"	2-3/16"	5	75.0
STC150	1-1/2"	3-5/16"	1-15/16"	2-7/16"	5	112.5
STC200	2"	3-13/16"	2"	2-7/8"	5	112.5
STC250	2-1/2"	4-5/8"	3-1/16"	3-9/16"	1	275.0
STC300	3"	5-5/16"	3-1/8"	4-1/8"	2	300.0
STC350	3-1/2"	6-1/16"	3-1/4"	4-13/16"	1	425.0
STC400	4"	6-9/16"	3-7/16"	5-3/8"	1	500.0
STC500	5"	8-1/16"	3-7/8"	6-9/16"	1	900.0
STC600	6"	9-1/4"	4-3/16"	7-5/8"	1	1300.0



RIGID - IMC

Conduit Hubs with Insulated Throats for Threaded Rigid Conduit and IMC

Features:

- Male hub thread - NPT
- Female thread for Rigid conduit and IMC - NPT
- Recessed o-ring seal assures watertight and dust tight connections
- Type NHUB with insulated throat and bonding locknut is suitable for service entrance application
- RoHS compliant

Standard Materials:

Malleable iron

Standard Finish:


Zinc plated

Applicable Third Party Standards:


UL Standard: 514B

Fed. Spec. W-F-408E

NEMA: FB-1

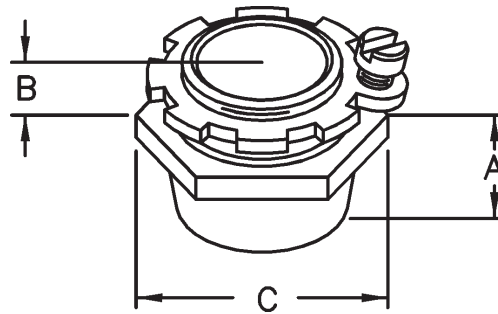

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
NHUB50-IC	1/2"	13/16"	5/8"	1-1/2"	300	18.2
NHUB75-IC	3/4"	15/16"	5/8"	1-13/16"	220	25.1
NHUB100-IC	1"	1-1/16"	3/4"	2-1/16"	130	38.9
NHUB125-IC	1-1/4"	1-1/4"	3/4"	2-5/8"	70	54.4
NHUB150-IC	1-1/2"	1-1/4"	13/16"	3-1/8"	54	63.6
NHUB200-IC	2"	1-1/4"	13/16"	3-9/16"	36	97.7
NHUB250-IC	2-1/2"	1-5/8"	1-3/16"	4-1/8"	20	195.5
NHUB300-IC	3"	1-3/4"	1-1/4"	4-15/16"	12	282.1
NHUB350-IC	3-1/2"	1-13/16"	1-5/16"	5-3/4"	6	350.9
NHUB400-IC	4"	1-15/16"	1-3/8"	6-3/16"	6	395.3
NHUB500-IC	5"	2-1/16"	1-7/16"	7-5/8"	4	717.4
NHUB600-IC	6"	2-1/8"	1-9/16"	8-13/16"	3	888.4

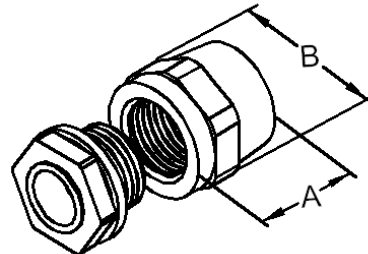

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
HUB-50	1/2"	3/4"	1-1/4"	25	19.4
HUB-75	3/4"	3/4"	1-9/16"	10	33.4
HUB-100	1"	13/16"	1-7/8"	5	44.1
HUB-125	1-1/4"	7/8"	2-5/16"	5	76.6
HUB-150	1-1/2"	1"	2-1/2"	2	85.3
HUB-200	2"	1-1/8"	3-1/16"	1	177.1
HUB-250	2-1/2"	1-7/16"	3-3/4"	1	221.3
HUB-300	3"	1-1/2"	4-5/16"	1	333.4
HUB-350	3-1/2"	1-1/2"	4-13/16"	1	384.1
HUB-400	4"	1-3/4"	5-5/16"	1	597.5



RIGID - IMC

Pull Elbows for Rigid Conduit and IMC

Application:

Female to Female: For connecting rigid conduit or IMC to rigid conduit or IMC to form 90° bend.

Male to Female: For connecting rigid conduit or IMC to box or enclosures to form 90° bend.

Features:

- Raintight
- Furnished with neoprene gasketed steel cover
- Furnished with steel locknut
- Threaded for Rigid conduit and IMC (Female-NPT, Male-

Standard Materials:


Body - Malleable iron
Gasket - Neoprene
Cover - Stamped steel

Standard

Finish:


Applicable Third Party

Standards:
UL Standard: 514B
NEMA: FB-1



Female to Female 90°

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
PEF-50	1/2"	2-3/16"	2-3/16"	165	34.4
PEF-75	3/4"	2-5/16"	2-5/16"	125	41.5
PEF-100	1"	3-1/16"	3-1/16"	80	64.4
PEF-125	1-1/4"	3-5/8"	3-5/8"	60	119.0
PEF-150	1-1/2"	4-1/16"	4-1/16"	24	176.4
PEF-200	2"	4-1/2"	4-1/2"	18	268.9



Male to Female 90°

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
PEM-50	1/2"	2-3/16"	2-7/16"	9/16"	150	42.8
PEM-75	3/4"	2-5/16"	2-5/8"	5/8"	109	53.8
PEM-100	1"	3-1/16"	3-3/16"	5/8"	60	85.9
PEM-125	1-1/4"	3-5/8"	4-1/16"	3/4"	48	136.7
PEM-150	1-1/2"	4-1/16"	5-3/16"	13/16"	21	216.1
PEM-200	2"	4-1/2"	5-11/16"	7/8"	12	347.2

RIGID - IMC

Offset Conduit Nipples for Rigid Conduit and IMC Malleable Iron

Application:
To offset the axis of raceways
3/4 of an inch.


Features:

- Threaded NPSM for Rigid conduit & IMC
- RoHS compliant

Standard Materials:
Malleable iron

Standard Finish:
Zinc plated

Applicable Third Party Standards:
UL Standard: 514B
Fed. Spec. W-F-408E
NEMA: FB-1

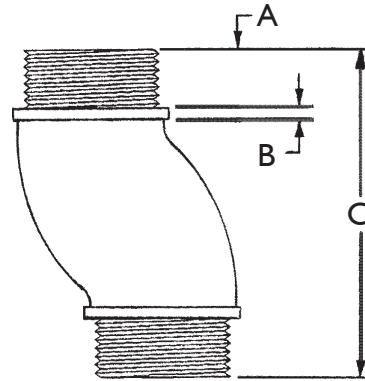

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PRE C
OSN-50	1/2"	7/16"	1/8"	2-1/4"	280	24.5
OSN-75	3/4"	1/2"	1/8"	2-7/16"	180	34.7
OSN-100	1"	9/16"	1/8"	2-1/2"	115	49.1
OSN-125	1-1/4"	5/8"	1/8"	2-5/8"	72	54.2



RIGID - IMC

Compression Rigid Connectors for Threadless Rigid Conduit and IMC, Malleable Iron

Features:

- Concrete tight male hub threads
- NPSM thread 1/2" through 2"
- NPT thread above 2"

Standard Materials:

Malleable iron
Steel locknut


Standard Finish:

Zinc plated


Applicable Third Party

Standards:

UL Standard: 514B
Fed. Spec. W-F-408E
NEMA: FB-1

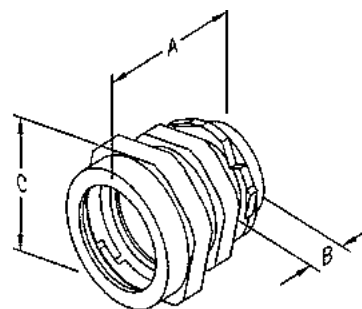

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
RCC50	1/2"	1-1/2"	1/2"	1-1/2"	270	23.9
RCC75	3/4"	1-1/2"	1/2"	1-5/8"	200	25.2
RCC100	1"	1-11/16"	9/16"	2"	130	38.7
RCC125	1-1/4"	2"	11/16"	2-3/8"	88	58.9
RCC150	1-1/2"	2-1/16"	11/16"	2-5/8"	72	71.6
RCC200	2"	2-1/4"	7/8"	3-5/16"	42	118.5
RCC250	2-1/2"	2-15/16"	1-1/4"	3-3/4"	2	308.5
RCC300	3"	3-1/8"	1-3/8"	4-1/4"	1	331.2
RCC350	3-1/2"	3-1/8"	1-3/8"	4-3/4"	1	342.8
RCC400	4"	3-3/8"	1-1/2"	5-5/16"	1	469.2

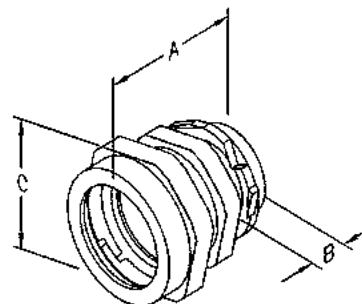

With Insulated Throat

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
RCC50-IC	1/2"	1-9/16"	9/16"	1-1/2"	270	23.8
RCC75-IC	3/4"	1-9/16"	9/16"	1-5/8"	200	26.2
RCC100-IC	1"	1-3/4"	5/8"	2"	130	39.5
RCC125-IC	1-1/4"	2"	11/16"	2-3/8"	88	56.8
RCC150-IC	1-1/2"	2-1/8"	3/4"	2-5/8"	72	73.6
RCC200-IC	2"	2-5/16"	13/16"	3-5/16"	42	119.7
RCC250-IC	2-1/2"	3"	1-5/16"	3-3/4"	2	287.5
RCC300-IC	3"	3-1/8"	1-7/16"	4-1/4"	1	328.0
RCC350-IC	3-1/2"	3-3/16"	1-1/2"	4-3/4"	1	346.2
RCC400-IC	4"	3-7/16"	1-9/16"	5-5/16"	1	484.0



RIGID - IMC

Compression Rigid Couplings for Threadless Rigid Conduit and IMC Malleable Iron

Features:

- Concrete tight

Standard Materials:

Malleable iron

Standard Finish:

Zinc plated


Applicable Third Party

Standards:

UL Standard: 514B

Fed. Spec. W-F-408E

NEMA: FB-1



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
RCK50	1/2"	1-13/16"	1/2"	1-1/2"	200	35.3
RCK75	3/4"	1-7/8"	1/2"	1-5/8"	150	34.2
RCK100	1"	2-3/16"	9/16"	2"	100	51.8
RCK125	1-1/4"	2-5/8"	3/4"	2-3/8"	63	85.5
RCK150	1-1/2"	2-11/16"	11/16"	2-5/8"	45	104.1
RCK200	2"	3-1/16"	15/16"	3-5/16"	24	171.8
RCK250	2-1/2"	4-1/2"	2"	3-3/4"	2	351.9
RCK300	3"	4-15/16"	2-1/4"	4-1/4"	1	421.8
RCK350	3-1/2"	5"	2-1/4"	4-3/4"	1	462.6
RCK400	4"	5-5/16"	2-7/16"	5-5/16"	1	579.0



RIGID - IMC

Set Screw Raintight Rigid Connectors for Threadless Rigid Conduit and IMC, Malleable Iron

Features:


- Available with insulated throat
- NPSM thread 1/2" through 2"
- Raintight

Standard Materials:


Malleable iron
Steel locknut
Neoprene rubber

Standard Finish:

Zinc plated



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
RRSC50	1/2"	2-1/8"	7/16"	1-5/16"	294	25.6
RRSC75	3/4"	2-7/16"	1/2"	1-9/16"	162	41.9
RRSC100	1"	2-11/16"	9/16"	1-7/8"	90	66.1
RRSC125	1-1/4"	3-1/16"	5/8"	2-3/16"	80	88.2
RRSC150	1-1/2"	3-1/4"	5/8"	2-1/2"	36	124.6
RRSC200	2"	3-5/16"	5/8"	2-15/16"	24	149.9



With Insulated Throats


CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
RRSC50-IC	1/2"	2-3/16"	1/2"	1-5/16"	294	25.8
RRSC75-IC	3/4"	2-1/2"	9/16"	1-9/16"	162	42.1
RRSC100-IC	1"	2-3/4"	5/8"	1-7/8"	90	66.5
RRSC125-IC	1-1/4"	3-1/8"	11/16"	2-3/16"	80	88.7
RRSC150-IC	1-1/2"	3-5/16"	11/16"	2-1/2"	36	125.3
RRSC200-IC	2"	3-3/8"	11/16"	2-15/16"	24	150.8

RIGID - IMC

Set Screw Raintight Rigid Couplings for Threadless Rigid Conduit and IMC, Malleable Iron

Standard Materials:
Malleable iron
Neoprene rubber

Standard Finish:
Zinc plated

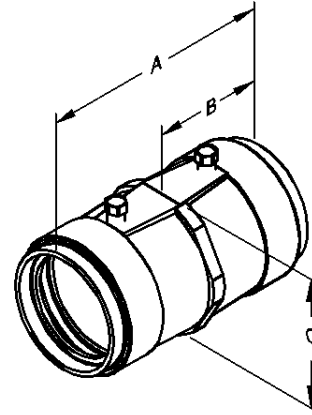

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
RRSK50	1/2"	3-1/16"	1-8/16"	1-3/8"	156	40.8
RRSK75	3/4"	3-3/8"	1-11/16"	1-9/16"	100	57.3
RRSK100	1"	4-1/8"	2-1/16"	1-7/8"	56	93.7
RRSK125	1-1/4"	4-5/16"	2-1/8"	2-3/16"	36	115.7
RRSK150	1-1/2"	4-7/8"	2-7/16"	2-1/2"	27	162.0
RRSK200	2"	5-1/8"	2-9/16"	3"	19	222.7

RIGID - IMC

Set Screw Rigid Connectors for Threadless Rigid Conduit and IMC

Features:

- Concrete tight when taped
- Available with insulated throat
- NPSM thread 1/2" through 2"
- NPT thread above 2"
- RoHS Compliant

Standard Materials:

Malleable iron
Steel locknut


Standard Finish:

Zinc plated

Applicable Third Party Standards:

UL Standard: 514B
Fed. Spec. W-F-408E
NEMA: FB-1

* Furnished with two set screws

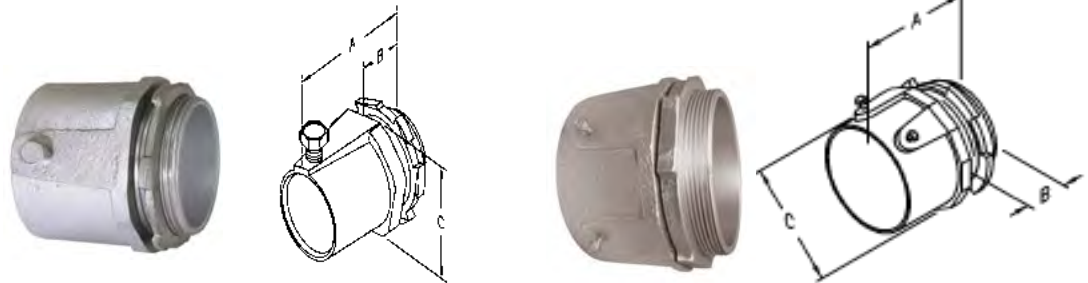


CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
RSC50	1/2"	1-3/8"	7/16"	1-5/16"	240	17.4
RSC75	3/4"	1-11/16"	1/2"	1-9/16"	150	29.6
RSC100	1"	1-15/16"	9/16"	1-7/8"	90	42.4
RSC125	1-1/4"	2-3/16"	5/8"	2-3/16"	72	57.5
RSC150	1-1/2"	2-5/16"	5/8"	2-1/2"	54	78.6
RSC200	2"	2-7/16"	5/8"	2-15/16"	36	101.8

EMT 2-1/2" to 4" fittings on page I are approved for use with EMT, IMC and Rigid conduit

^ RSC500	*5"	4-11/16"	1-3/8"	6-1/2"	I	900.0
^ RSC600	*6"	4-15/16"	1-1/2"	7-1/2"	I	1226.4

^ UL Listing not applicable to these

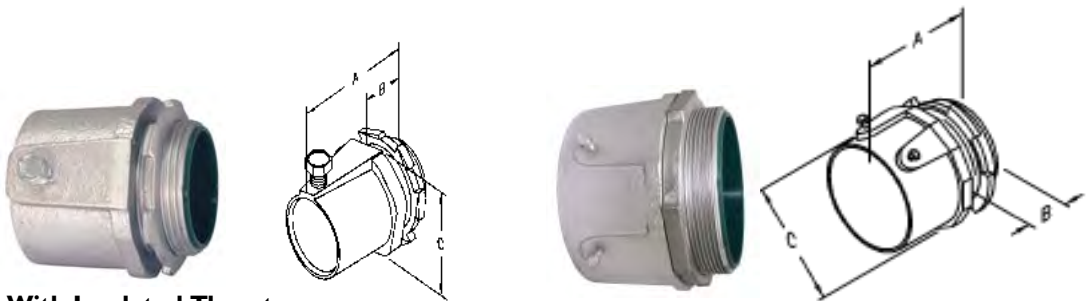

With Insulated Throat

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
RSC50-IC	1/2"	1-3/8"	1/2"	1-5/16"	240	18.0
RSC75-IC	3/4"	1-11/16"	9/16"	1-9/16"	150	26.7
RSC100-IC	1"	1-15/16"	5/8"	1-7/8"	90	43.8
RSC125-IC	1-1/4"	2-3/16"	11/16"	2-3/16"	72	55.7
RSC150-IC	1-1/2"	2-5/16"	11/16"	2-1/2"	54	79.1
RSC200-IC	2"	2-7/16"	11/16"	2-15/16"	36	92.7

EMT 2-1/2" to 4" fittings on page I are approved for use with EMT, IMC and Rigid conduit

^ RSC500-IC	*5"	4-11/16"	1-7/16"	6-1/2"	I	926.0
^ RSC600-IC	*6"	4-15/16"	1-9/16"	7-1/2"	I	1203.2

^ UL Listing not applicable to these

RIGID - IMC

Set Screw Rigid Couplings for Threadless Rigid Conduit and IMC

Features:

- Concrete tight when taped

Standard Materials:

Malleable iron

Standard Finish:

Zinc plated

Applicable Third Party


Standards:

UL Standard: 514B

Fed. Spec. W-F-408E

NEMA: FB-1

* Furnished with four set screws

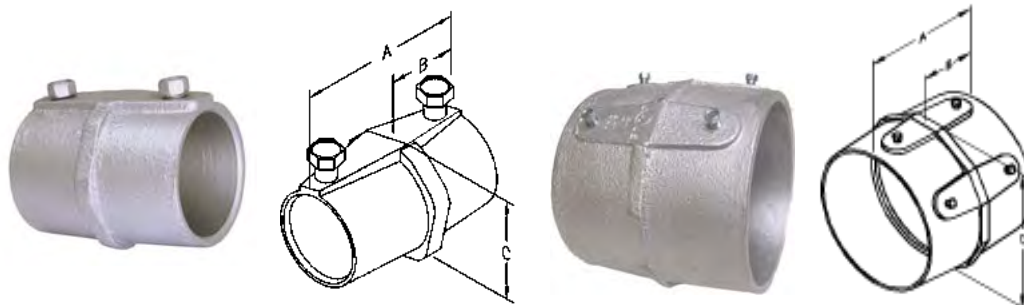

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
RSK50	1/2"	1-3/4"	3/4"	1-3/8"	200	26.4
RSK75	3/4"	2"	7/8"	1-9/16"	120	39.8
RSK100	1"	2-11/16"	1-3/16"	1-7/8"	64	62.4
RSK125	1-1/4"	2-3/4"	1-1/4"	2-3/16"	48	75.8
RSK150	1-1/2"	3-3/16"	1-1/2"	2-1/2"	40	107.4
RSK200	2"	3-3/8"	1-9/16"	3"	28	155.1
EMT 2-1/2" to 4" fittings on page 2 are approved for use with EMT, IMC and Rigid conduit						
^ RSK500	*5"	6"	2-13/16"	6-1/2"	1	1092.6
^ RSK600	*6"	6-1/2"	3"	7-1/2"	1	1539.8

^ UL Listing not applicable to these

RIGID - IMC

FS & FD Cast Device Boxes

Features:

- Tapered threads (NPT with integral bushings)
- Internal grounding screw
- Suitable for use in wet locations when used with FSFDCM1 cover and FSFDCG gasket
- Malleable iron is suitable for concrete use

Standard Materials:

Malleable iron

Standard Finish:

Zinc plated

Applicable Third Party

Standards:

UL Standard: 514A


NEMA: FB-1



FS Type




FD Type

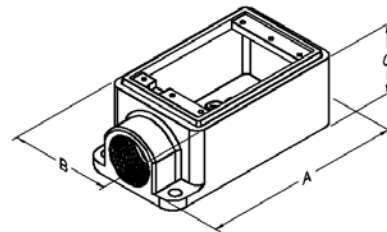

FSC Type



FDC Type

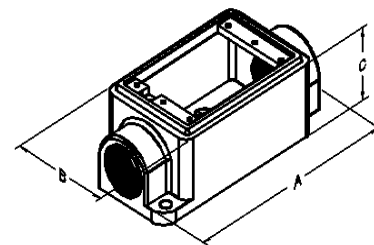

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
FS50	1/2"	5-1/4"	2-15/16"	2-1/8"	24	221.9
FS75	3/4"	5-1/4"	2-15/16"	2-1/8"	24	233.5
FS100	1"	5-1/4"	2-15/16"	2-1/8"	24	242.8
FD50	1/2"	5-1/4"	3"	2-7/8"	16	278.1
FD75	3/4"	5-1/4"	3"	2-7/8"	16	272.8
FD100	1"	5-1/4"	3"	2-7/8"	16	283.7
FSC50	1/2"	6-1/16"	2-15/16"	2-1/8"	24	234.4
FSC75	3/4"	6-1/16"	2-15/16"	2-1/8"	24	240.6
FSC100	1"	6-1/16"	2-15/16"	2-1/8"	24	250.2
FDC50	1/2"	6-1/16"	3"	2-7/8"	16	313.1
FDC75	3/4"	6-1/16"	3"	2-7/8"	16	93.8
FDC100	1"	6-1/16"	3"	2-7/8"	16	305.6



RIGID - IMC

FS & FD Cast Device Box Covers & Gasket

Features:

- Each cover comes with captive screws
- FSFDCS1 & FSFDCA1 - Raintight if used with FSFDCG1

Standard Materials:

FSFDCSx - Steel
FSFDCAx - Aluminum
Gasket - Neoprene rubber

Standard Finish:

Zinc plated

Applicable Third Party

Standards:
CSA Standard: C22.2
No. 42.1
UL 514D



FSFDCS1

Blank cover for splices and taps
No device
Raintight if used with FSFDCG1
Sheet steel



FSFDCS2

Unguarded square handle switch
Sheet steel



FSFDCS3

Duplex receptacles
Sheet steel



FSFDCS4

GFI receptacles
Sheet steel

Steel

CATALOG NUMBER	PCS/ BOX	WEIGHT PER C
FSFDCS1	25	18.1
FSFDCS2	25	15.6
FSFDCS3	25	12.5
FSFDCS4	25	11.9

Aluminum

CATALOG NUMBER	PCS/ BOX	WEIGHT PER C
FSFDCA1	25	9.4



FSFDCA1

Blank cover for splices and taps
No device
Raintight if used with FSFDCG1
Sheet aluminum

Gasket

CATALOG NUMBER	PCS/ BOX	WEIGHT PER C
FSFDCG1	25	3.5



FSFDCG1

Gasket - Raintight if used with FSFDCS1, FSFDCA1 & FSFDCM1
Neoprene rubber



RIGID - IMC

FS & FD Cast Device Box Covers & Gasket

Features:

- Each cover individually bagged and supplied with screws
- FSFDCM1 - Raintight if used with FSFDCG

Standard Materials:

FSFDCMx - Malleable iron
Gasket - Neoprene rubber

Standard Finish:

Zinc plated

Applicable Third Party

Standards:

UL Standard: 514D



FSFDCM1

Blank cover for
splices and taps
No device
Raintight if used
with FSFDCG
Malleable iron



FSFDCM2

Guarded square
handle switch
Malleable iron



FSFDCM3

Duplex receptacle
Malleable iron

Malleable Iron Covers

CATALOG NUMBER	PCS/ BOX	WEIGHT PER C
FSFDCM1	25	56.3
FSFDCM2	25	62.5
FSFDCM3	25	54.5

Gasket

CATALOG NUMBER	PCS/ BOX	WEIGHT PER C
FSFDCG	25	3.5

^ UL Listing not applicable to this part



FSFDCG

Gasket - Raintight if used
with FSFDCM1
Neoprene rubber



RIGID - IMC

Conduit Nipples for Rigid Conduit and IMC Malleable Iron

Application:

Use through knockout to connect box to conduit coupling.
Use with a locknut to connect two boxes side by side or back to back.
Use with a locknut to connect fixture housing to continuous runs.

Features:

- Threaded NPSM for Rigid conduit & IMC
- RoHS compliant

Standard Materials:

Steel screw machined in 1/2" size
Malleable iron in sizes 3/4" thru 6"


Standard Finish:

Zinc plated


Applicable Third Party

Standards:

UL Standard: 514B
Fed. Spec. W-F-408E
NEMA: FB-1



CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
N50	1/2"	1/2"	1-1/8"	9/16"	1200	5.5
N75	3/4"	3/4"	1-7/16"	3/4"	600	7.7
N100	1"	1"	1-3/4"	13/16"	480	14.6
N125	1-1/4"	1-1/4"	2-1/16"	1-1/8"	250	24.3
N150	1-1/2"	1-1/2"	2-5/16"	1-1/8"	170	28.7
N200	2"	2"	2-7/8"	1-1/4"	100	37.5
N250	2-1/2"	2-1/2"	3-9/16"	1-7/16"	60	70.5
N300	3"	3"	4-3/8"	1-9/16"	32	123.5
N350	3-1/2"	3-1/2"	4-3/4"	1-5/8"	28	163.1
N400	4"	4"	4-7/8"	1-11/16"	15	198.4
N500	5"	5"	6"	2-1/8"	10	330.7
N600	6"	6"	7"	2-1/4"	5	440.9



With Insulated Throat

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
N50-IC	1/2"	1/2"	1-1/8"	11/16"	1200	5.6
N75-IC	3/4"	3/4"	1-7/16"	13/16"	600	7.8
N100-IC	1"	1"	1-3/4"	7/8"	480	14.8
N125-IC	1-1/4"	1-1/4"	2-1/16"	1-3/16"	250	24.6
N150-IC	1-1/2"	1-1/2"	2-5/16"	1-3/16"	170	29.1
N200-IC	2"	2"	2-7/8"	1-5/16"	100	38.1
N250-IC	2-1/2"	2-1/2"	3-9/16"	1-1/2"	60	71.7
N300-IC	3"	3"	4-3/8"	1-5/8"	32	125.4
N350-IC	3-1/2"	3-1/2"	4-3/4"	1-11/16"	28	165.8
N400-IC	4"	4"	4-7/8"	1-13/16"	15	201.6
N500-IC	5"	5"	6"	2-3/16"	10	336.0
N600-IC	6"	6"	7"	2-3/8"	5	448.0

RIGID - IMC

Steel Conduit Nipples for Rigid Conduit and IMC

Application:
 Use through knockout to connect box to conduit coupling.
 Use with a locknut to connect two boxes side by side or back to back.
 Use with a locknut to connect fixture housing to continuous runs.


Features:

- Threaded NPSM for Rigid conduit & IMC
- RoHS compliant


Standard Materials:
 Steel screw machined

Standard Finish:
 Zinc plated

Applicable Third Party Standards:
 UL Standard: 514B
 Fed. Spec. W-F-408E
 NEMA: FB-1



CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
N50S	1/2"	1/2"	1"	1/2"	1200	2.8
N75S	3/4"	3/4"	1-1/4"	9/16"	600	4.4
N100S	1"	1"	1-9/16"	5/8"	480	7.8



With Insulated Throat

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
N50S-IC	1/2"	1/2"	1-1/16"	1/2"	1200	3.0
N75S-IC	3/4"	3/4"	1-5/16"	9/16"	600	4.6
N100S-IC	1"	1"	1-5/8"	5/8"	480	8.1



RIGID - IMC

Reducing Bushings for Threaded Rigid Conduit and IMC

Features:

- RB1 thru RB13 - NPSM internal and external threads
- RB14 thru RB31 - NPT internal and external threads

Standard Materials:


RB1 thru 13 - Steel
RB14 thru 31 - Malleable Iron

Standard Finish:

Zinc plated

Applicable Third Party

Standards:
UL Standard: 514B
Fed. Spec. W-F-408E
NEMA: FB-1

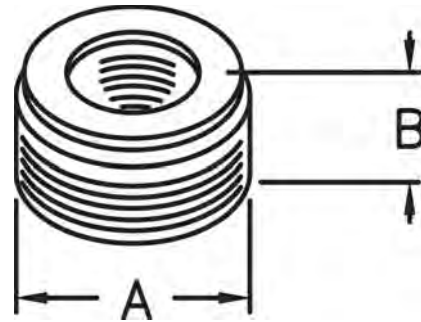

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
RB1	3/4" x 1/2"	1"	9/16"	900	4.4
RB2	1" x 1/2"	1-5/16"	5/8"	250	13.1
RB3	1" x 3/4"	1-5/16"	5/8"	500	7.5
RB4	1-1/4" x 1/2"	1-5/8"	3/4"	120	28.8
RB5	1-1/4" x 3/4"	1-5/8"	3/4"	150	21.9
RB6	1-1/4" x 1"	1-5/8"	3/4"	250	14.4
RB7	1-1/2" x 1/2"	1-7/8"	3/4"	100	40.6
RB8	1-1/2" x 3/4"	1-7/8"	3/4"	100	34.4
RB9	1-1/2" x 1"	1-7/8"	3/4"	100	25.8
RB10	1-1/2" x 1-1/4"	1-7/8"	3/4"	200	11.5
RB11	2" x 1"	2-5/16"	7/8"	50	66.3
RB12	2" x 1-1/4"	2-5/16"	7/8"	80	48.8
RB13	2" x 1-1/2"	2-5/16"	7/8"	80	33.8
RB14	2-1/2" x 1"	2-7/8"	1-5/16"	30	126.3
RB15	2-1/2" x 1-1/4"	2-7/8"	1-5/16"	30	127.5
RB16	2-1/2" x 1-1/2"	2-7/8"	1-5/16"	30	106.2
RB17	2-1/2" x 2"	2-7/8"	1-5/16"	30	68.8
RB18	3" x 1"	3-7/16"	1-5/16"	25	190.6
RB19	3" x 1-1/4"	3-7/16"	1-5/16"	25	190.6
RB20	3" x 1-1/2"	3-7/16"	1-5/16"	25	162.5
RB21	3" x 2"	3-7/16"	1-5/16"	25	146.9
RB22	3" x 2-1/2"	3-7/16"	1-9/16"	25	116.9
RB23	3-1/2" x 2"	4"	1-1/2"	15	240.0
RB24	3-1/2" x 2-1/2"	4"	1-9/16"	15	234.4
RB25	3-1/2" x 3"	4"	1-5/8"	15	112.5
RB26	4" x 2"	4-7/16"	1-1/2"	15	303.8
RB27	4" x 2-1/2"	4-7/16"	1-1/2"	15	350.0
RB28	4" x 3"	4-7/16"	1-9/16"	15	237.5
RB29	4" x 3-1/2"	4-7/16"	1-3/4"	15	138.8
RB30	5" x 4"	5-1/2"	1-3/4"	10	375.0
RB31	6" x 5"	6-9/16"	1-3/4"	10	462.5



RIGID - IMC

Steel Nail Straps for use with Metallic Conduit


Application:
To secure Rigid, IMC and EMT conduit.

Features:

- Tensile strength of cast steel is 30% higher than malleable iron
- Withstands greater striking force

Standard Materials:
Cast steel
Steel

Standard Finish:
Zinc plated

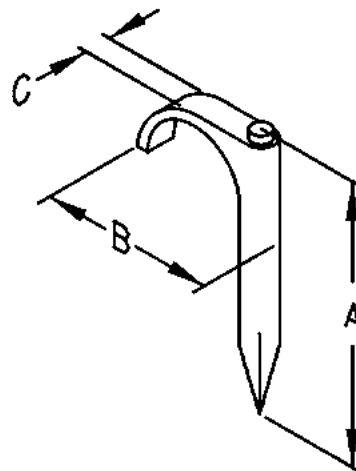

Cast Steel Nail Straps

CATALOG NUMBER	TRADE SIZE RIGID	TRADE SIZE EMT	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
NS-50	-	1/2"	1-13/16"	1-1/16"	1/4"	1000	2.5
NS-75	1/2"	3/4"	2"	1-1/4"	1/4"	800	3.2
NS-100	3/4"	1"	2-1/2"	1-1/2"	1/4"	600	4.4



Steel Nail Straps

CATALOG NUMBER	TRADE SIZE RIGID	TRADE SIZE EMT	DIM A	DIM B	WEIGHT PER C
NSS-50		1/2"	1-1/8"	1-15/16"	2.7
NSS-75	1/2"	3/4"	1-1/4"	1-15/16"	2.9
NSS-100	3/4"	1"	1-9/16"	2-1/8"	3.1

RIGID - IMC


One & Two-Hole Straps for Rigid Conduit and IMC, Steel

Application:


One Hole Straps click on type for Rigid or IMC Conduit..
Two Hole Straps snap on type for Rigid or IMC conduit where higher load bearing capacity is required.

Standard Materials:
Steel

Standard Finish:
Zinc plated



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
SR50-1	1/2"	1-3/4"	5/8"	7/8"	1000	3.0
SR75-1	3/4"	2-1/16"	3/4"	1-1/16"	1000	3.0
SR100-1	1"	2-7/16"	7/8"	1-5/16"	500	5.0
SR125-1	1-1/4"	2-13/16"	7/8"	1-11/16"	500	7.0
SR150-1	1-1/2"	3-7/16"	1"	1-15/16"	250	10.0
SR200-1	2"	3-7/8"	1-1/8"	2-7/16"	50	17.0
SR250-1	2-1/2"	4-11/16"	1-1/4"	2-15/16"	25	29.0
SR300-1	3"	5-5/16"	1-1/4"	3-9/16"	25	50.0
SR350-1	3-1/2"	5-15/16"	1-1/4"	4-1/16"	15	110.0
SR400-1	4"	6-7/16"	1-1/4"	4-9/16"	15	120.0



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
SR50-2	1/2"	2-1/2"	5/8"	13/16"	250	1.0
SR75-2	3/4"	2-7/8"	11/16"	1-1/16"	150	2.0
SR100-2	1"	3-3/8"	3/4"	1-5/16"	100	4.0
SR125-2	1-1/4"	4-3/16"	7/8"	1-5/8"	50	5.0
SR150-2	1-1/2"	4-5/8"	15/16"	1-7/8"	50	8.0
SR200-2	2"	5-1/8"	1"	2-3/8"	25	13.0
SR250-2	2-1/2"	5-7/8"	1"	2-7/8"	25	20.0
SR300-2	3"	6-1/2"	1"	3-1/2"	20	25.0
SR350-2	3-1/2"	7-3/8"	1"	4"	15	33.0
SR400-2	4"	8"	1"	4-1/2"	10	36.0
SR500-2	5"	9"	1"	5-1/4"	10	49.0
SR600-2	6"	9-1/4"	1"	6-3/8"	10	55.0

RIGID - IMC

One-Hole Straps for Rigid Conduit and IMC Malleable Iron

Features:

- Heavy duty casting
- RoHS compliant

Standard Materials:

Malleable iron


Standard Finish:

Zinc plated


Applicable Third Party

Standards:

UL Standard: 2239



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
ST50	1/2"	1-7/16"	5/8"	5/16"	1220	6.2
ST75	3/4"	1-3/4"	3/4"	5/16"	1000	7.5
ST100	1"	1-7/8"	7/8"	3/8"	630	9.2
ST125	1-1/4"	2-3/8"	1"	7/16"	310	21.7
ST150	1-1/2"	2-3/4"	1-1/4"	7/16"	204	31.8
ST200	2"	3-1/4"	1-3/8"	9/16"	125	44.2
ST250	2-1/2"	3-1/4"	1-3/8"	9/16"	48	66.3
ST300	3"	5-3/16"	1-3/4"	9/16"	40	103.2
ST350	3-1/2"	5-1/2"	2-1/8"	3/4"	45	185.0
ST400	4"	6-1/2"	2-1/4"	3/4"	21	221.0
ST500	5"	7-3/8"	2-11/16"	3/4"	16	368.8
ST600	6"	8-5/8"	3-1/8"	1-1/8"	9	631.3



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	DIM D	PCS/UNITS PER BOX	WEIGHT PER C
CB50	1/2"	2"	1"	1/2"	5/16"	860	8.4
CB75	3/4"	2-5/16"	1-1/16"	1/2"	5/16"	594	12.2
CB100	1"	2-5/16"	1-1/4"	9/16"	3/8"	430	15.9
CB125	1-1/4"	3-7/16"	1-7/8"	3/4"	7/16"	280	22.1
CB150	1-1/2"	3-13/16"	1-7/8"	13/16"	7/16"	192	35.4
CB200	2"	4-3/4"	1-15/16"	1"	9/16"	118	50.5
CB250	2-1/2"	5-3/4"	2-7/16"	1"	9/16"	90	81.0
CB300	3"	6-3/4"	2-5/8"	1"	9/16"	70	82.9
CB350	3-1/2"	7-1/8"	2-7/8"	1-1/16"	3/4"	52	148.2
CB400	4"	8-13/16"	3-1/16"	1-1/16"	3/4"	40	198.9
CB500	5"	10-1/8"	3-3/4"	1-3/16"	3/4"	13	343.8
CB600	6"	12-3/16"	4"	1-1/2"	3/4"	16	418.6



RIGID - IMC

Clamp Back Spacers for Rigid Conduit and IMC Malleable Iron

Features:

- Heavy duty casting
- Stackable
- RoHS compliant

Standard Materials:

Malleable iron


Standard Finish:

Zinc plated

Applicable Third Party

Standards:

UL Standard: 2239

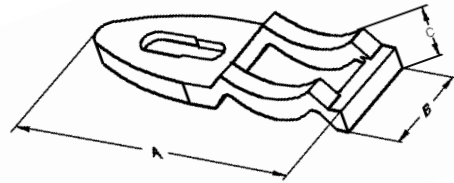

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	WEIGHT PER C
SCB50	1/2"	2-3/16"	7/8"	5/16"	5.5
SCB75	3/4"	2-9/16"	7/8"	3/8"	6.6
SCB100	1"	3-1/8"	1"	7/16"	10.6
SCB125	1-1/4"	3-5/8"	1-1/8"	1/2"	14.1
SCB150	1-1/2"	4-1/8"	1-1/4"	9/16"	18.7
SCB200	2"	5-3/8"	1-3/4"	5/8"	34.2
SCB250	2-1/2"	6-3/8"	1-7/8"	11/16"	44.1
SCB300	3"	7-7/16"	2-5/8"	3/4"	61.7
SCB350	3-1/2"	8-1/16"	2-5/8"	15/16"	89.9
SCB400	4"	8-3/4"	2-5/8"	15/16"	102.5
SCB500	5"	9-7/16"	2-5/8"	15/16"	126.8
SCB600	6"	11-1/16"	2-7/8"	1-1/16"	190.3



RIGID - IMC

J-CLAMP for Rigid Conduit, IMC and EMT

Features:

- Steel bolt - Case hardened
- RoHS compliant

Standard Materials:

Malleable iron


Standard Finish:

Zinc plated

Applicable Third Party

Standards:

UL Standard: 2239

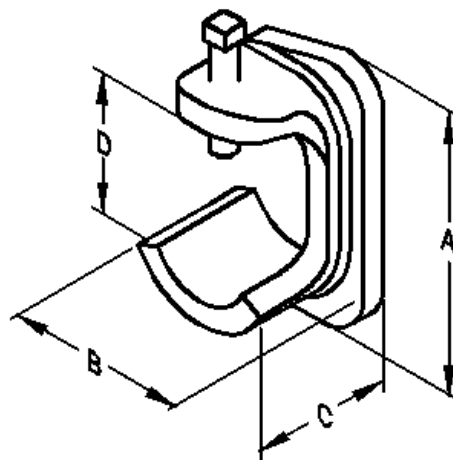

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	DIM D	PCS/UNITS PER BOX	WEIGHT PER C
JC1	1/2"	2-15/16"	1-9/16"	1-5/16"	1-13/16"	25	41.3
JC2	3/4"	3-1/4"	1-7/8"	1-7/16"	1-15/16"	25	56.3
JC3	1" - 1-1/4"	4-1/8"	2-1/16"	1-13/16"	2-11/16"	10	118.8
JC4	1-1/2" - 2"	5-1/4"	3-9/16"	2-1/4"	3-1/2"	5	228.1
JC5	2-1/2" - 3"	6-11/16"	4-13/16"	2-13/16"	4-3/4"	2	375.0
JC6	3-1/2" - 4"	7-15/16"	5-13/16"	3-5/16"	5-13/16"	2	550.0



RIGID - IMC

Right Angle Clamp and U-Bolts for Rigid Conduit, IMC & EMT

Application:

Designed to secure Rigid conduit, IMC, or EMT perpendicular to beam, channel and angle supports.

Features:

- Two hex nuts
- RoHS compliant

Standard Materials:


- Steel U-Bolts and nuts
- Malleable iron

Standard Finish:

Right Angle Clamp - Hot dip galvanized
U-Bolt - Mechanically galvanized


Applicable Third Party

Standards:
UL Standard: 2239



Right Angle Conduit Clamp

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	DIM D	DIM E	PCS/UNITS PER BOX	WEIGHT PER C
SRAC50	1/2"	1"	1-1/4"	2-1/2"	1-13/16"	2-1/16"	140	34.9
SRAC75	3/4"	1-1/8"	1-3/8"	2-13/16"	1-13/16"	2-1/4"	120	38.6
SRAC100	1"	1-3/8"	1-5/8"	3-1/16"	1-13/16"	2-9/16"	100	43.8
SRAC125	1-1/4"	1-3/4"	2"	3-3/16"	1-13/16"	2-7/8"	90	48.5
SRAC150	1-1/2"	2"	2-3/8"	3-1/2"	1-13/16"	3-1/4"	80	54.8
SRAC200	2"	2-1/2"	2-1/2"	4-1/2"	2-5/8"	4-1/16"	45	92.6
SRAC250	2-1/2"	3"	3-1/4"	4-7/8"	2-5/8"	4-1/2"	40	106.5
SRAC300	3"	3-5/8"	3-7/8"	5-3/8"	2-5/8"	5-1/8"	35	126.4
SRAC350	3-1/2"	4-1/16"	4-9/16"	5-7/8"	2-5/8"	5-5/8"	30	136.0
SRAC400	4"	4-11/16"	5-1/16"	6-11/16"	2-5/8"	6-1/8"	25	163.4

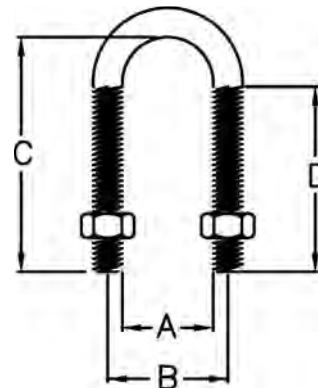

U-Bolts

CATALOG NUMBER	TRADE SIZE	THREAD SIZE	DIM A	DIM B	DIM C	DIM D	PCS/UNITS PER BOX	WEIGHT PER C
SUBM50	1/2"	5/16 - 18	1"	1-1/4"	2-1/2"	1-13/16"	400	12.5
SUBM75	3/4"	5/16 - 18	1-1/8"	1-3/8"	2-13/16"	1-13/16"	350	15.6
SUBM100	1"	5/16 - 18	1-3/8"	1-5/8"	3-1/16"	1-13/16"	300	15.7
SUBM125	1-1/4"	5/16 - 18	1-3/4"	2"	3-3/16"	1-13/16"	300	15.8
SUBM150	1-1/2"	5/16 - 18	2"	2-3/8"	3-1/2"	1-13/16"	250	18.8
SUBM200	2"	3/8 - 16	2-1/2"	2-1/2"	4-1/2"	2-5/8"	150	31.3
SUBM250	2-1/2"	3/8 - 16	3"	3-1/4"	4-7/8"	2-5/8"	140	31.4
SUBM300	3"	3/8 - 16	3-5/8"	3-7/8"	5-3/8"	2-5/8"	130	37.5
SUBM350	3-1/2"	3/8 - 16	4-1/16"	4-9/16"	5-7/8"	2-5/8"	120	40.6
SUBM400	4"	3/8 - 16	5-11/16"	5-1/16"	6-11/16"	2-5/8"	90	43.4



RIGID - IMC

Edge Type and Parallel Conduit Clamps for Rigid Conduit, IMC & EMT

Application:
Designed to secure Rigid conduit, IMC, or EMT across, parallel or perpendicular to beam, channel and angle supports.

Features:

- Easily installed
- Capable of withstanding heavy loads
- RoHS compliant

Standard Materials:


Malleable iron with steel bolts and nuts

Standard Finish:

Malleable iron parts - Hot dip galvanized


Applicable Third Party

Standards:
UL Standard: 2239



Edge Type Conduit Clamps

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
SETC50	1/2"	2-13/16"	2-1/8"	100	77.3
SETC75	3/4"	2-15/16"	2-3/8"	90	80.6
SETC100	1"	3-1/16"	2-5/8"	85	88.9
SETC125	1-1/4"	3-1/16"	3-1/16"	60	100.6
SETC150	1-1/2"	3-15/16"	3-1/4"	50	112.8
SETC200	2"	4-1/2"	4-1/16"	35	175.2
SETC250	2-1/2"	5-1/8"	4-5/8"	30	206.9
SETC300	3"	5-3/4"	5-1/4"	25	246.0



Parallel Conduit Clamps

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
SPARC50	1/2"	2-7/8"	1-7/16"	130	53.8
SPARC75	3/4"	3-1/16"	1-11/16"	120	59.7
SPARC100	1"	3-1/4"	2"	100	62.4
SPARC125	1-1/4"	3-5/8"	2-1/8"	70	80.6
SPARC150	1-1/2"	3-7/8"	2-3/16"	70	86.5
SPARC200	2"	4-5/8"	2-7/8"	60	99.6
SPARC250	2-1/2"	5-1/4"	3-1/4"	40	130.4
SPARC300	3"	5-7/8"	3-7/8"	30	161.2
SPARC350	3-1/2"	6-5/16"	4-5/16"	26	190.4
SPARC400	4"	6-13/16"	4-13/16"	22	210.0

^ UL Listing not applicable to these sizes

RIGID - IMC

Rigid Conduit Nipples for Threaded Rigid Conduit

Features:


- NPT Threads

Standard Materials:

Steel

Standard Finish:

Zinc plated

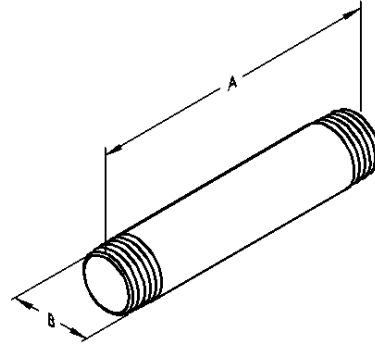

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
RCN50C	1/2"	Close	13/16"	25	8.8
RCN50150	1/2"	1-1/2"	13/16"	25	9.5
RCN50200	1/2"	2"	13/16"	25	13.2
RCN50250	1/2"	2-1/2"	13/16"	25	16.3
RCN50300	1/2"	3"	13/16"	25	19.8
RCN50350	1/2"	3-1/2"	13/16"	25	24.3
RCN50400	1/2"	4"	13/16"	25	27.6
RCN50500	1/2"	5"	13/16"	25	34.0
RCN50550	1/2"	5-1/2"	13/16"	25	37.3
RCN50600	1/2"	6"	13/16"	25	49.1
RCN50800	1/2"	8"	13/16"	BULK	55.1
RCN501000	1/2"	10"	13/16"	BULK	69.5
RCN501200	1/2"	12"	13/16"	BULK	83.8
RCN75C	3/4"	Close	1-1/16"	25	12.1
RCN75200	3/4"	2"	1-1/16"	25	14.3
RCN75250	3/4"	2-1/2"	1-1/16"	25	18.7
RCN75300	3/4"	3"	1-1/16"	25	23.2
RCN75350	3/4"	3-1/2"	1-1/16"	25	28.7
RCN75400	3/4"	4"	1-1/16"	25	33.1
RCN75500	3/4"	5"	1-1/16"	25	41.9
RCN75600	3/4"	6"	1-1/16"	25	52.9
RCN75800	3/4"	8"	1-1/16"	BULK	70.1
RCN751000	3/4"	10"	1-1/16"	BULK	88.2
RCN751200	3/4"	12"	1-1/16"	BULK	105.8

RIGID - IMC

Rigid Conduit Nipples for Threaded Rigid Conduit

Features:


- NPT Threads

Standard Materials:

Steel

Standard Finish:

Zinc plated

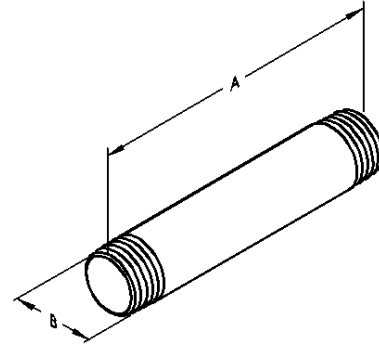

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
RCN100C	1"	Close	1-5/16"	25	14.3
RCN100200	1"	2"	1-5/16"	25	17.6
RCN100250	1"	2-1/2"	1-5/16"	25	26.4
RCN100300	1"	3"	1-5/16"	25	33.1
RCN100350	1"	3-1/2"	1-5/16"	25	39.7
RCN100400	1"	4"	1-5/16"	25	46.3
RCN100500	1"	5"	1-5/16"	25	59.5
RCN100600	1"	6"	1-5/16"	25	72.5
RCN100800	1"	8"	1-5/16"	BULK	99.2
RCN1001000	1"	10"	1-5/16"	BULK	124.6
RCN1001200	1"	12"	1-5/16"	BULK	152.1
RCN125C	1-1/4"	Close	1-11/16"	25	19.8
RCN125200	1-1/4"	2"	1-11/16"	25	22.1
RCN125250	1-1/4"	2-1/2"	1-11/16"	25	33.1
RCN125300	1-1/4"	3"	1-11/16"	25	41.9
RCN125350	1-1/4"	3-1/2"	1-11/16"	25	57.3
RCN125400	1-1/4"	4"	1-11/16"	25	61.7
RCN125500	1-1/4"	5"	1-11/16"	25	79.4
RCN125600	1-1/4"	6"	1-11/16"	25	94.8
RCN125800	1-1/4"	8"	1-11/16"	BULK	134.5
RCN1251000	1-1/4"	10"	1-11/16"	BULK	172.0
RCN1251200	1-1/4"	12"	1-11/16"	BULK	207.2

RIGID - IMC

Rigid Conduit Nipples For Threaded Rigid Conduit

Features:


- NPT Threads

Standard Materials:

Steel

Standard Finish:

Zinc plated

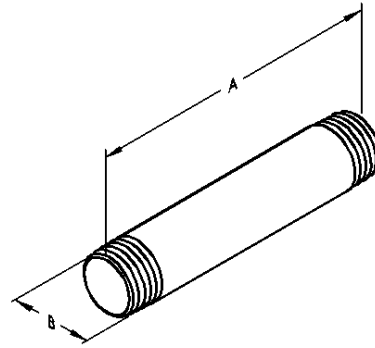

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
RCNI 50C	1-1/2"	Close	1-7/8"	25	22.1
RCNI 50200	1-1/2"	2"	1-7/8"	25	24.3
RCNI 50250	1-1/2"	2-1/2"	1-7/8"	25	33.1
RCNI 50300	1-1/2"	3"	1-7/8"	25	44.1
RCNI 50350	1-1/2"	3-1/2"	1-7/8"	25	52.9
RCNI 50400	1-1/2"	4"	1-7/8"	25	66.1
RCNI 50500	1-1/2"	5"	1-7/8"	25	85.9
RCNI 50600	1-1/2"	6"	1-7/8"	25	108.0
RCNI 50800	1-1/2"	8"	1-7/8"	BULK	152.1
RCNI 501000	1-1/2"	10"	1-7/8"	BULK	196.2
RCNI 501200	1-1/2"	12"	1-7/8"	BULK	238.1
RCN200C	2"	Close	2-3/8"	25	39.7
RCN200250	2"	2-1/2"	2-3/8"	25	41.2
RCN200300	2"	3"	2-3/8"	25	57.3
RCN200350	2"	3-1/2"	2-3/8"	25	70.6
RCN200400	2"	4"	2-3/8"	25	88.2
RCN200500	2"	5"	2-3/8"	25	114.6
RCN200600	2"	6"	2-3/8"	25	143.3
RCN200800	2"	8"	2-3/8"	BULK	202.8
RCN2001000	2"	10"	2-3/8"	BULK	282.2
RCN2001200	2"	12"	2-3/8"	BULK	326.3

RIGID - IMC

Rigid Conduit Nipples for Threaded Rigid Conduit

Features:


- NPT Threads

Standard Materials:

Steel

Standard Finish:

Zinc plated

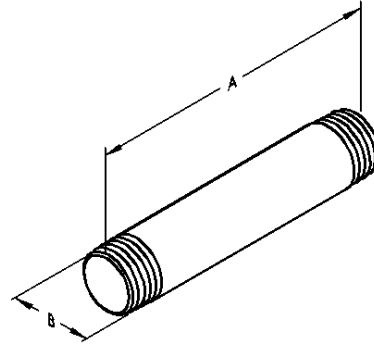

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
RCN250C	2-1/2"	Close	2-7/8"	BULK	61.7
RCN250300	2-1/2"	3"	2-7/8"	BULK	63.9
RCN250350	2-1/2"	3-1/2"	2-7/8"	BULK	88.2
RCN250400	2-1/2"	4"	2-7/8"	BULK	112.4
RCN250500	2-1/2"	5"	2-7/8"	BULK	156.5
RCN250600	2-1/2"	6"	2-7/8"	BULK	205.0
RCN250800	2-1/2"	8"	2-7/8"	BULK	297.6
RCN2501000	2-1/2"	10"	2-7/8"	BULK	392.4
RCN2501200	2-1/2"	12"	2-7/8"	BULK	487.2
RCN300C	3"	Close	3-1/2"	BULK	77.2
RCN300300	3"	3"	3-1/2"	BULK	86.0
RCN300350	3"	3-1/2"	3-1/2"	BULK	114.6
RCN300400	3"	4"	3-1/2"	BULK	147.7
RCN300500	3"	5"	3-1/2"	BULK	205.0
RCN300600	3"	6"	3-1/2"	BULK	262.4
RCN300800	3"	8"	3-1/2"	BULK	379.2
RCN3001000	3"	10"	3-1/2"	BULK	496.0
RCN3001200	3"	12"	3-1/2"	BULK	575.4

RIGID - IMC

Rigid Conduit Nipples For Threaded Rigid Conduit

Features:


- NPT Threads

Standard Materials:

Steel

Standard Finish:

Zinc plated

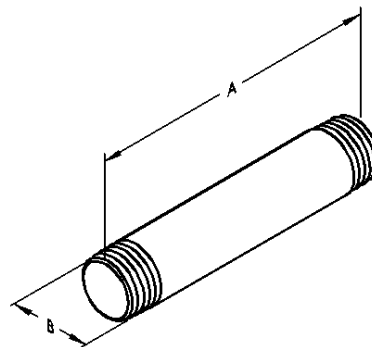

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
RCN350C	3-1/2"	Close	4"	BULK	88.2
RCN350400	3-1/2"	4"	4"	BULK	180.8
RCN350500	3-1/2"	5"	4"	BULK	249.1
RCN350600	3-1/2"	6"	4"	BULK	315.3
RCN350800	3-1/2"	8"	4"	BULK	449.7
RCN3501000	3-1/2"	10"	4"	BULK	584.2
RCN3501200	3-1/2"	12"	4"	BULK	718.7
RCN400C	4"	Close	4-1/2"	BULK	114.6
RCN400400	4"	4"	4-1/2"	BULK	202.8
RCN400500	4"	5"	4-1/2"	BULK	280.0
RCN400600	4"	6"	4-1/2"	BULK	357.1
RCN400800	4"	8"	4-1/2"	BULK	518.1
RCN4001000	4"	10"	4-1/2"	BULK	668.0
RCN4001200	4"	12"	4-1/2"	BULK	824.5

RIGID - IMC

Rigid Conduit Couplings For Threaded Rigid Conduit

Features:


- NPSM Threads

Standard Materials:

Steel

Standard Finish:

Zinc plated

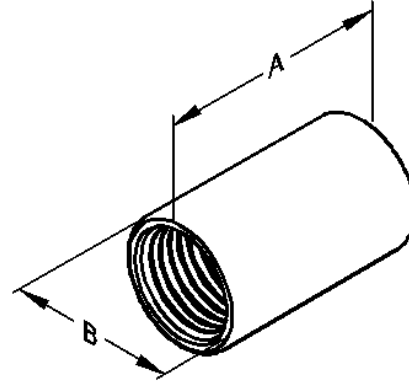

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
RCP50	1/2"	1	1-5/8"	100	12.6
RCP75	3/4"	1-1/4"	1-5/8"	50	15.9
RCP100	1"	1-1/2"	2"	30	27.6
RCP125	1-1/4"	1-7/8"	2-1-16"	25	33.1
RCP150	1-1/2"	2-1/8"	2-1/8"	25	44.1
RCP200	2"	2-5/8"	2-3/16"	20	70.5
RCP250	2-1/2"	3-3/16"	3-3/16"	12	169.8
RCP300	3"	3-13/16"	3-1/4"	8	205.0
RCP350	3-1/2"	4-1/2"	3-7/16"	4	264.6
RCP400	4"	4-13/16"	3-1/2"	4	348.3
^ RCP500	5"	6"	3-15/16"	2	440.9
^ RCP600	6"	7-1/8"	4-5/16"	1	738.5

^ UL Listing not applicable to these sizes



RIGID - IMC

90° Rigid Elbows & 45° Rigid Elbows

Features:

- NPT Threads

Standard Materials:

Steel


Standard Finish:

Zinc plated


Applicable Third Party

Standards:

UL Standard: 6




CATALOG NUMBER	TRADE SIZE	DIM A	DIM R	PCS/UNITS PER BOX	WEIGHT PER C
RCE5090	1/2"	2.00"/2.03"	4.00"/4.04"	50	76.3
RCE7590	3/4"	2.00"/2.03"	4.50"/4.54"	50	112.5
RCE10090	1"	2.25"/2.28"	5.75"/5.80"	20	196.9
RCE12590	1-1/4"	2.80"/2.83"	7.25"/7.30"	20	312.5
RCE15090	1-1/2"	2.80"/2.83"	8.25"/8.31"	10	440.0
RCE20090	2"	2.80"/2.83"	9.50"/9.56"	10	660.0
RCE25090	2-1/2"	4.00"/4.05"	10.50"/10.56"	BULK	1180.0
RCE30090	3"	5.00"/5.05"	13.00"/13.07"	BULK	1650.0
RCE35090	3-1/2"	6.00"/6.06"	15.00"/15.08"	BULK	2700.0
RCE40090	4"	6.75"/6.81"	16.00"/16.08"	BULK	3300.0



CATALOG NUMBER	TRADE SIZE	DIM A	DIM R	PCS/UNITS PER BOX	WEIGHT PER C
RCE5045	1/2"	2.00"/2.03"	4.00"/4.04"	50	69.5
RCE7545	3/4"	2.00"/2.03"	4.00"/4.04"	50	102.6
RCE10045	1"	2.25"/2.28"	5.75"/5.80"	35	160.9
RCE12545	1-1/4"	2.80"/2.83"	7.25"/7.30"	30	235.9
RCE15045	1-1/2"	2.80"/2.83"	8.25"/8.31"	15	306.4
RCE20045	2"	2.80"/2.83"	9.50"/9.56"	15	469.6
RCE25045	2-1/2"	4.00"/4.05"	10.50"/10.56"	BULK	800.3
RCE30045	3"	5.00"/5.05"	13.00"/13.07"	BULK	1300.7
RCE35045	3-1/2"	6.00"/6.06"	15.00"/15.08"	BULK	1600.5
RCE40045	4"	6.75"/6.81"	16.00"/16.08"	BULK	2101.0



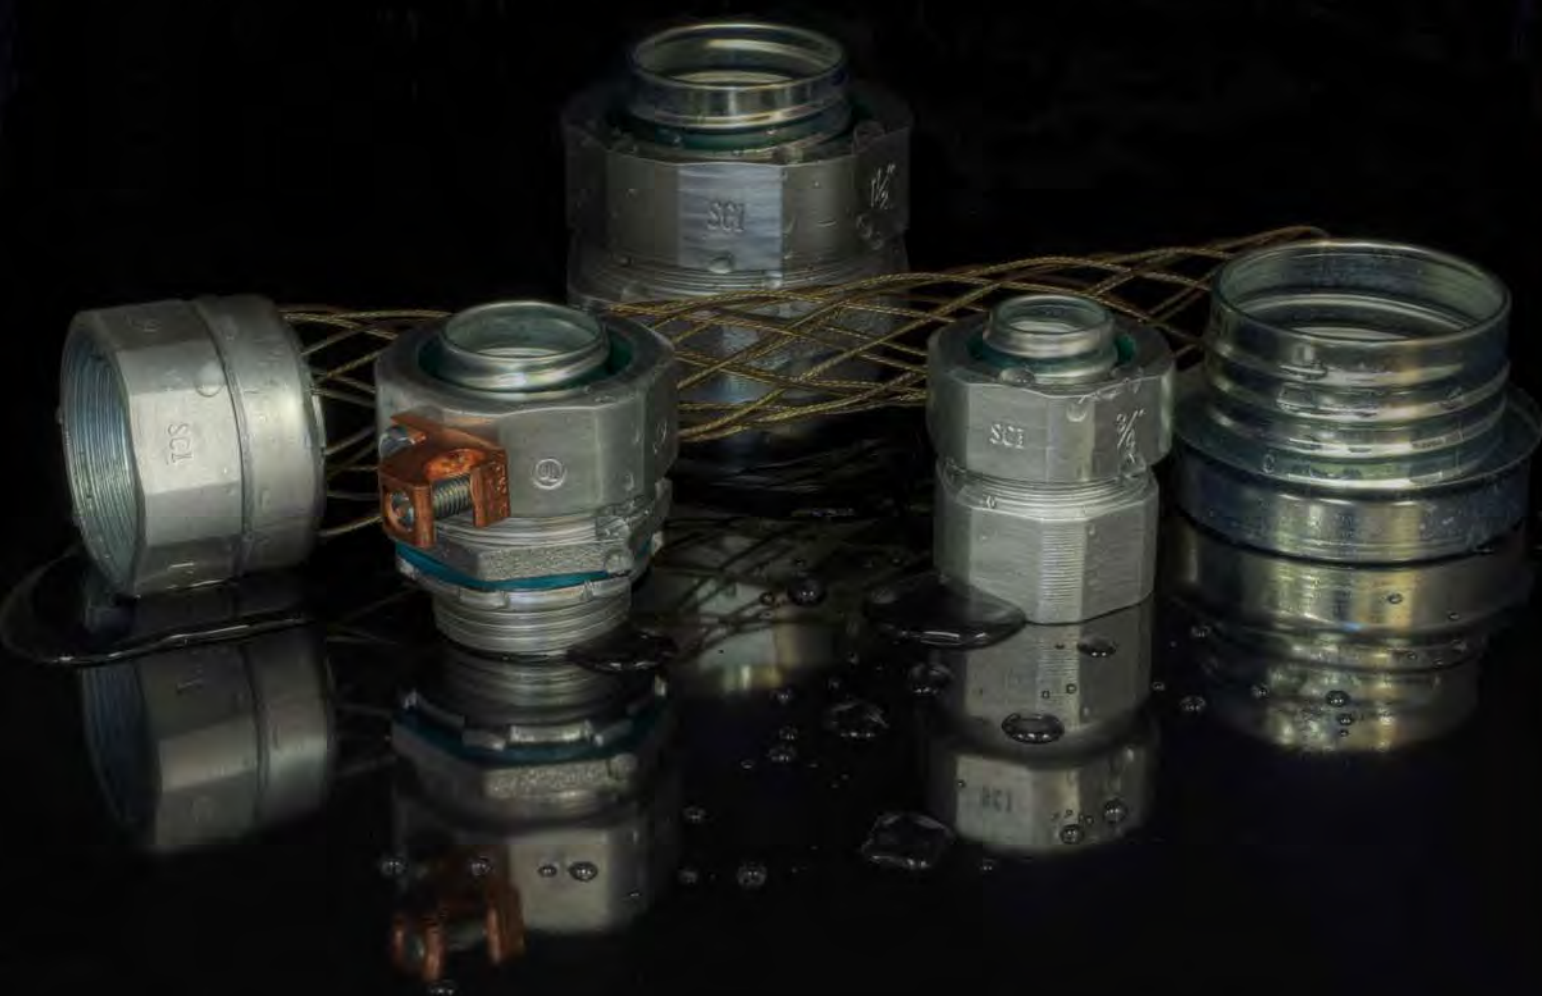

LIQUIDTIGHT FITTINGS:

Screw On Liquidtight
Space Saver Liquidtight
Straight, 45, and 90 degree Liquidtight
Liquidtight to Rigid Conduit
Steel Ferrules
Wire Mesh Grips for Liquidtight

LIQUIDTIGHT

Straight Connectors for use with Liquidtight Flexible Metallic Conduit Malleable Iron

Features:

- Tapered threaded male hub - NPT
- Compact, slim diameter
- Steel locknut
- Liquidtight/Raintight/Oiltight/Concrete tight
- Suitable for wet locations
- Long ferrule prevents pullout & tight bend conduit pop out
- RoHS compliant

Standard Materials:

Malleable iron
Steel ferrule
Steel locknut


Standard Finish:

Zinc plated

Applicable Third Party standards:


UL Standard: 514B
Fed. Spec. W-F-408E
NEMA: FB-1

UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following hazardous locations under NEC 501-4(b), 502-4(a)(2); Class I, Div. 2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2.



CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
LT38	3/8"	1/2"	15/16"	9/16"	1-3/16"	400	15.4
LT50	1/2"	1/2"	15/16"	5/8"	1-5/16"	300	17.6
LT75	3/4"	3/4"	1-1/16"	9/16"	1-9/16"	180	28.7
LT100	1"	1"	1-1/8"	11/16"	1-7/8"	150	39.7
LT125	1-1/4"	1-1/4"	1-1/4"	11/16"	2-1/4"	100	55.1
LT150	1-1/2"	1-1/2"	1-3/8"	11/16"	2-1/2"	70	70.5
LT200	2"	2"	1-7/16"	3/4"	3"	50	99.2
LT250	2-1/2"	2-1/2"	2-3/16"	1-1/16"	4-1/16"	15	363.8
LT300	3"	3"	2-1/2"	1-1/8"	4-7/8"	8	456.4
LT350	3-1/2"	3-1/2"	2-11/16"	1-3/16"	5-7/16"	6	668.0
LT400	4"	4"	3"	1-1/4"	6-1/16"	4	789.2
LT500	5"	5"	3-1/4"	1-7/16"	7-1/4"	1	1036.2
LT600	6"	6"	3-5/16"	1-9/16"	8-5/16"	1	1366.9

^ UL Listing not applicable to these sizes



With Insulated Throat

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
LT38-IC	3/8"	1/2"	15/16"	5/8"	1-3/16"	400	15.6
LT50-IC	1/2"	1/2"	15/16"	5/8"	1-5/16"	300	17.8
LT75-IC	3/4"	3/4"	1-1/16"	5/8"	1-9/16"	180	28.9
LT100-IC	1"	1"	1-1/8"	3/4"	1-7/8"	150	40.1
LT125-IC	1-1/4"	1-1/4"	1-1/4"	3/4"	2-1/4"	100	55.7
LT150-IC	1-1/2"	1-1/2"	1-3/8"	3/4"	2-1/2"	70	71.2
LT200-IC	2"	2"	1-7/16"	13/16"	3"	50	100.2
LT250-IC	2-1/2"	2-1/2"	2-3/16"	1-1/16"	4-1/16"	15	367.4
LT300-IC	3"	3"	2-1/2"	1-1/4"	4-7/8"	8	460.9
LT350-IC	3-1/2"	3-1/2"	2-11/16"	1-5/16"	5-7/16"	6	674.7
LT400-IC	4"	4"	3"	1-3/8"	6-1/16"	4	797.1
LT500-IC	5"	5"	3-1/4"	1-9/16"	7-1/4"	1	1046.6
LT600-IC	6"	6"	3-5/16"	1-11/16"	8-5/16"	1	1380.6

^ UL Listing not applicable to these sizes



LIQUIDTIGHT

Straight Connectors and External Aluminum Grounding Lugs for use with Liquidtight Flexible Metallic Conduit, Malleable Iron

Features:

- Tapered threaded male hub - NPT
- Compact, slim diameter
- Steel locknut
- Liquidtight/Raintight/Oiltight/Concrete tight
- Suitable for wet locations
- Long ferrule prevents pullout & tight bend conduit pop out
- RoHS compliant

Standard Materials:

Malleable iron
Steel ferrule
Steel locknut


Standard Finish:

Zinc plated

Applicable Third Party Standards:

UL Standard: 514B
UL Standard: 467
Fed. Spec. W-F-408E
NEMA: FB-1

UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following hazardous locations under NEC 501-4(b), 502-4(a)(2); Class I, Div. 2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1 1/4" under NEC 351-1

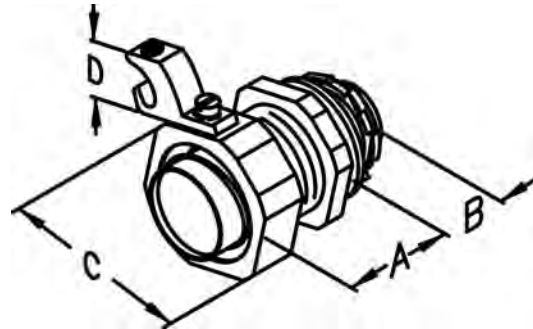

CATALOG NUMBER	TRADE SIZE	LUG SIZE	DIM A	DIM B	DIM C	DIM D	PCS/UNITS PER BOX	WEIGHT PER C
LT38AL	3/8"	4-14	15/16"	9/16"	1-3/16"	3/4"	400	17.4
LT50AL	1/2"	4-14	15/16"	5/8"	1-5/16"	3/4"	300	19.5
LT75AL	3/4"	4-14	1-1/16"	9/16"	1-9/16"	3/4"	180	30.7
LT100AL	1"	4-14	1-1/8"	11/16"	1-7/8"	3/4"	150	41.7
LT125AL	1-1/4"	4-14	1-1/4"	11/16"	2-1/4"	3/4"	70	57.0
LT150AL	1-1/2"	4-14	1-3/8"	11/16"	2-1/2"	3/4"	60	72.4
LT200AL	2"	4-14	1-7/16"	3/4"	3"	3/4"	40	100.9
LT250AL	2-1/2"	1/0-8	2-3/16"	1-1/16"	4-1/16"	1-1/8"	15	370.9
LT300AL	3"	1/0-8	2-1/2"	1-1/8"	4-7/8"	1-1/8"	8	462.9
LT350AL	3-1/2"	3/0-6	2-11/16"	1-3/16"	5-7/16"	1-1/2"	6	682.1
LT400AL	4"	3/0-6	3"	1-1/4"	6-1/16"	1-1/2"	4	802.9
^ LT500AL	5"	250-MCM-6	3-1/4"	1-7/16"	7-1/4"	1-11/16"	1	1052.7
^ LT600AL	6"	250-MCM-6	3-5/16"	1-9/16"	8-5/16"	1-11/16"	1	1389.4

^ UL Listing not applicable to these sizes

LIQUIDTIGHT

Straight Connectors with Insulated Throats and External Aluminum Grounding Lugs for use with Liquidtight Flexible Metallic Conduit Malleable Iron

Features:

- Tapered threaded male hub - NPT
- Compact, slim diameter
- Steel locknut
- Liquidtight/Raintight/Oiltight/Concrete tight
- Suitable for wet locations
- Long ferrule prevents pullout & tight bend conduit pop out
- RoHS compliant

Standards Materials:

Malleable iron
Steel ferrule
Steel locknut


Standard Finish:
Zinc plated

Applicable Third Party

Standards:

UL Standard: 514B
UL Standard: 467
Fed. Spec. W-F-408E
NEMA: FB-1

UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following hazardous locations under NEC 501-4(b), 502-4(a)(2); Class I, Div. 2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1 1/4" under NEC 351-1

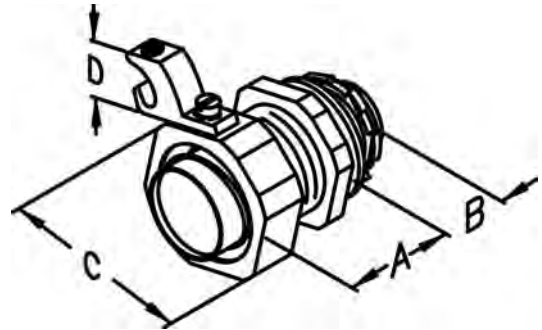

CATALOG NUMBER	TRADE SIZE	LUG SIZE	DIM A	DIM B	DIM C	DIM D	PCS/UNITS PER BOX	WEIGHT PER C
LT38AL-IC	3/8"	4-14	15/16"	5/8"	1-3/16"	3/4"	400	17.6
LT50AL-IC	1/2"	4-14	15/16"	5/8"	1-5/16"	3/4"	300	19.8
LT75AL-IC	3/4"	4-14	1-1/16"	5/8"	1-9/16"	3/4"	180	30.9
LT100AL-IC	1"	4-14	1-1/8"	3/4"	1-7/8"	3/4"	150	41.9
LT125AL-IC	1-1/4"	4-14	1-1/4"	3/4"	2-1/4"	3/4"	70	57.3
LT150AL-IC	1-1/2"	4-14	1-3/8"	3/4"	2-1/2"	3/4"	60	72.8
LT200AL-IC	2"	4-14	1-7/16"	3/4"	3"	3/4"	40	101.4
LT250AL-IC	2-1/2"	1/0-8	2-3/16"	1-1/16"	4-1/16"	1-1/8"	15	372.6
LT300AL-IC	3"	1/0-8	2-1/2"	1-1/4"	4-7/8"	1-1/8"	8	465.2
LT350AL-IC	3-1/2"	3/0-6	2-11/16"	1-5/16"	5-7/16"	1-1/2"	6	685.6
LT400AL-IC	4"	3/0-6	3"	1-3/8"	6-1/16"	1-1/2"	4	806.9
LT500AL-IC	5"	250-MCM-6	3-1/4"	1-9/16"	7-1/4"	1-11/16"	1	1057.9
LT600AL-IC	6"	250-MCM-6	3-5/16"	1-11/16"	8-5/16"	1-11/16"	1	1394.9

^ UL Listing not applicable to these sizes



LIQUIDTIGHT

Straight Connectors with Insulated Throats and External Copper Grounding Lugs for use with Liquidtight Flexible Metallic Conduit Malleable Iron

Features:

- Tapered threaded male hub - NPT
- Compact, slim diameter
- Steel locknut
- Liquidtight/Raintight/Oiltight/Concrete tight
- Suitable for wet locations
- Long ferrule prevents pullout & tight bend conduit pop out
- RoHS compliant

Standard Materials:

Malleable iron
Steel ferrule
Steel locknut


Standard Finish:

Zinc plated

Applicable Third Party Standards:

UL Standard: 514B
UL Standard: 467
Fed. Spec. W-F-408E
NEMA: FB-1

UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following hazardous locations under NEC 501-4(b), 502-4(a)(2); Class I, Div. 2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1 1/4" under NEC 351-1

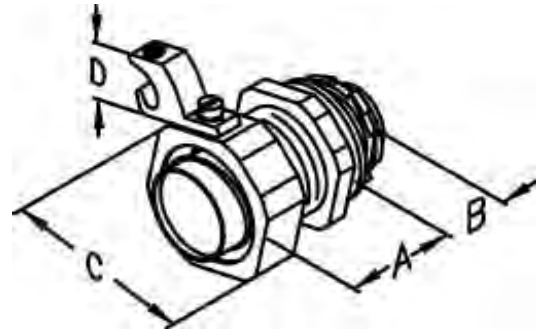

CATALOG NUMBER	TRADE SIZE	LUG SIZE	DIM A	DIM B	DIM C	DIM D	PCS/UNITS PER BOX	WEIGHT PER C
LT38CL-IC	3/8"	4-14	15/16"	5/8"	1-3/16"	3/4"	400	17.6
LT50CL-IC	1/2"	4-14	15/16"	5/8"	1-5/16"	3/4"	300	19.8
LT75CL-IC	3/4"	4-14	1-1/16"	5/8"	1-9/16"	3/4"	180	30.9
LT100CL-IC	1"	4-14	1-1/8"	3/4"	1-7/8"	3/4"	150	41.9
LT125CL-IC	1-1/4"	4-14	1-1/4"	3/4"	2-1/4"	3/4"	70	57.3
LT150CL-IC	1-1/2"	4-14	1-3/8"	3/4"	2-1/2"	3/4"	60	72.8
LT200CL-IC	2"	4-14	1-7/16"	13/16"	3"	3/4"	40	101.4
LT250CL-IC	2-1/2"	1/0-8	2-3/16"	1-1/16"	4-1/16"	1-1/8"	15	372.6
LT300CL-IC	3"	1/0-8	2-1/2"	1-1/4"	4-7/8"	1-1/8"	8	465.2
LT350CL-IC	3-1/2"	3/0-6	2-11/16"	1-5/16"	5-7/16"	1-1/2"	6	685.6
LT400CL-IC	4"	3/0-6	3"	1-3/8"	6-1/16"	1-1/2"	4	806.9
LT500CL-IC	5"	250-MCM-6	3-1/4"	1-9/16"	7-1/4"	1-11/16"	1	1057.9
LT600CL-IC	6"	250-MCM-6	3-5/16"	1-11/16"	8/5/16"	1-11/16"	1	1394.9

^ UL Listing not applicable to these sizes

LIQUIDTIGHT

45° Connectors for use with Liquidtight Flexible Metallic Conduit Malleable Iron

Features:

- Tapered threaded male hub - NPT
- Compact, slim diameter with small turning radius
- Steel locknut
- Liquidtight/Raintight/Oiltight/Concrete tight
- Suitable for wet locations
- Long ferrule prevents pullout & tight bend conduit pop out
- RoHS compliant

Standard Materials:


Malleable iron
Steel ferrule
Steel locknut

Standard Finish:


Zinc plated

Applicable Third Party

Standards:
UL Standard: 514B
Fed. Spec. W-F-408E
NEMA: FB-1



CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	DIM D	PCS/UNITS PER BOX	WEIGHT PER C
LT3845	3/8"	1/2"	2"	9/16"	1-3/16"	1-1/4"	200	27.1
LT5045	1/2"	1/2"	2"	9/16"	1-5/16"	1-3/8"	200	27.1
LT7545	3/4"	3/4"	2-1/4"	9/16"	1-9/16"	1-5/8"	140	39.7
LT10045	1"	1"	2-1/2"	5/8"	1-7/8"	1-13/16"	100	63.5
LT12545	1-1/4"	1-1/4"	3"	11/16"	2-1/4"	2-3/16"	60	87.3
LT15045	1-1/2"	1-1/2"	3-3/16"	3/4"	2-1/2"	2-7/16"	40	110.2
LT20045	2"	2"	3-5/8"	3/4"	3"	2-5/8"	20	176.4
LT25045	2-1/2"	2-1/2"	7-7/16"	1-1/16"	4-1/16"	4-9/16"	1	573.2
LT30045	3"	3"	8-7/16"	1-1/16"	4-7/8"	5-3/8"	1	859.8
LT35045	3-1/2"	3-1/2"	10-3/16"	1-3/16"	5-7/16"	6-5/8"	1	1278.7
LT40045	4"	4"	11-3/4"	1-1/4"	6-1/16"	6-7/8"	1	1521.2

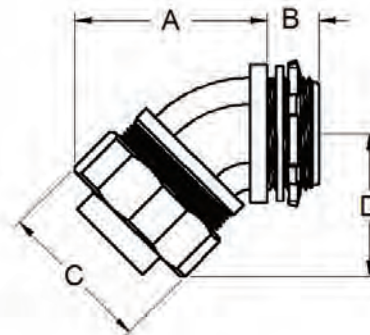

With Insulated Throat

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	DIM D	PCS/UNITS PER BOX	WEIGHT PER C
LT3845-IC	3/8"	1/2"	2"	5/8"	1-3/16"	1-1/4"	200	27.3
LT5045-IC	1/2"	1/2"	2"	5/8"	1-5/16"	1-3/8"	200	27.3
LT7545-IC	3/4"	3/4"	2-1/4"	5/8"	1-9/16"	1-5/8"	140	40.1
LT10045-IC	1"	1"	2-1/2"	11/16"	1-7/8"	1-13/16"	100	64.2
LT12545-IC	1-1/4"	1-1/4"	3"	3/4"	2-1/4"	2-3/16"	60	88.1
LT15045-IC	1-1/2"	1-1/2"	3-3/16"	3/4"	2-1/2"	2-7/16"	40	111.3
LT20045-IC	2"	2"	3-5/8"	13/16"	3"	2-5/8"	20	178.2
LT25045-IC	2-1/2"	2-1/2"	7-7/16"	1-1/8"	4-1/16"	4-9/16"	1	578.9
LT30045-IC	3"	3"	8-7/16"	1-1/8"	4-7/8"	5-3/8"	1	868.4
LT35045-IC	3-1/2"	3-1/2"	10-3/16"	1-1/4"	5-7/16"	6-5/8"	1	1294.5
LT40045-IC	4"	4"	11-3/4"	1-5/16"	6-1/16"	6-7/8"	1	1536.4



UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following hazardous locations under NEC 501-4(b), 502-4(a)(2); Class I, Div. 2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2.

LIQUIDTIGHT

45° Connectors and External Aluminum Grounding Lugs for use with Liquidtight Flexible Metallic Conduit, Malleable Iron

Application:

Connects conduit and terminates bonding connector run externally across liquidtight conduit.

Features:

- Tapered threaded male hub - NPT
- Compact, slim diameter with small turning radius
- Steel locknut
- Liquidtight/Raintight/Oiltight/Concrete tight
- Suitable for wet locations
- Long ferrule prevents pullout & tight bend conduit pop out
- RoHS compliant

Standard Materials:

Malleable iron
Steel ferrule
Steel locknut

Standard Finish:


Zinc plated

Applicable Third Party


Standards:

UL Standard: 514B
UL Standard: 467
Fed. Spec. W-F-408E
NEMA: FB-1

UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following hazardous locations under NEC 501-4(b), 502-4(a)(2); Class I, Div. 2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1 1/4" under NEC 351-1

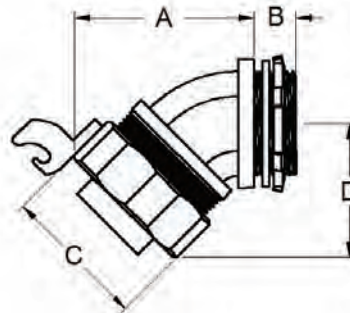

CATALOG NUMBER	TRADE SIZE	LUG SIZE	DIM A	DIM B	DIM C	DIM D	PCS/UNITS PER BOX	WEIGHT PER C
LT3845AL	3/8"	4-14	2"	9/16"	1-3/16"	1-1/4"	200	29.3
LT5045AL	1/2"	4-14	2"	9/16"	1-5/16"	1-3/8"	200	29.3
LT7545AL	3/4"	4-14	2-1/4"	9/16"	1-9/16"	1-5/8"	140	41.9
LT10045AL	1"	4-14	2-1/2"	5/8"	1-7/8"	1-13/16"	100	65.7
LT12545AL	1-1/4"	4-14	3"	11/16"	2-1/4"	2-3/16"	60	89.5
LT15045AL	1-1/2"	4-14	3-3/16"	3/4"	2-1/2"	2-7/16"	40	112.4
LT20045AL	2"	4-14	3-5/8"	3/4"	3"	2-5/8"	20	178.6
LT25045AL	2-1/2"	1/0-8	7-7/16"	1-1/16"	4-1/16"	4-9/16"	1	582.0
LT30045AL	3"	1/0-8	8-7/16"	1-1/16"	4-7/8"	5-3/8"	1	868.6
LT35045AL	3-1/2"	3/0-6	10-3/16"	1-3/16"	5-7/16"	6-5/8"	1	1296.3
LT40045AL	4"	3/0-6	11-3/4"	1-1/4"	6-1/16"	6-7/8"	1	1538.8



With Insulated Throat

CATALOG NUMBER	TRADE SIZE	LUG SIZE	DIM A	DIM B	DIM C	DIM D	PCS/UNITS PER BOX	WEIGHT PER C
LT3845AL-IC	3/8"	4-14	2"	5/8"	1-3/16"	1-1/4"	200	29.6
LT5045AL-IC	1/2"	4-14	2"	5/8"	1-5/16"	1-3/8"	200	29.6
LT7545AL-IC	3/4"	4-14	2-1/4"	5/8"	1-9/16"	1-5/8"	140	42.3
LT10045AL-IC	1"	4-14	2-1/2"	11/16"	1-7/8"	1-13/16"	100	66.4
LT12545AL-IC	1-1/4"	4-14	3"	3/4"	2-1/4"	2-3/16"	64	90.4
LT15045AL-IC	1-1/2"	4-14	3-3/16"	3/4"	2-1/2"	2-7/16"	40	113.5
LT20045AL-IC	2"	4-14	3-5/8"	13/16"	3"	2-5/8"	20	180.4
LT25045AL-IC	2-1/2"	1/0-8	7-7/16"	1-1/8"	4-1/16"	4-9/16"	1	587.8
LT30045AL-IC	3"	1/0-8	8-7/16"	1-1/8"	4-7/8"	5-3/8"	1	887.4
LT35045AL-IC	3-1/2"	3/0-6	10-3/16"	1-1/4"	5-7/16"	6-5/8"	1	1309.2
LT40045AL-IC	4"	3/0-6	11-3/4"	1-5/16"	6-1/16"	6-7/8"	1	1554.1

LIQUIDTIGHT

45° Connectors with Insulated Throats and External Copper Grounding Lugs for use with Liquidtight Flexible Metallic Conduit Malleable Iron

Application:

Connects conduit and terminates bonding connector run externally across liquidtight conduit.

Features:

- Tapered threaded male hub - NPT
- Compact, slim diameter with small turning radius
- Steel locknut
- Liquidtight/Raintight/Oiltight/Concrete tight
- Suitable for wet locations
- Long ferrule prevents pullout & tight bend conduit pop out
- RoHS compliant

Standard Materials:

Malleable iron
Steel ferrule
Steel locknut


Standard Finish:

Zinc plated

Applicable Third Party Standards:

UL Standard: 514B
UL Standard: 467
Fed. Spec. W-F-408E
NEMA: FB-1

UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following hazardous locations under NEC 501-4(b), 502-4(a)(2); Class I, Div. 2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1 1/4" under NEC 351-1

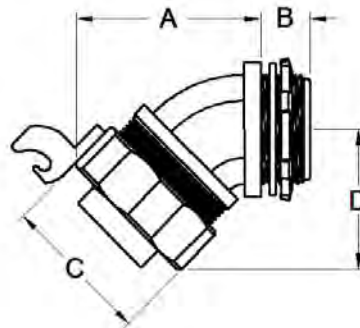

CATALOG NUMBER	TRADE SIZE	LUG SIZE	DIM A	DIM B	DIM C	DIM D	PCS/UNITS PER BOX	WEIGHT PER C
LT3845CL-IC	3/8"	4-14	2"	5/8"	1-3/16"	1-1/4"	200	29.6
LT5045CL-IC	1/2"	4-14	2"	5/8"	1-5/16"	1-3/8"	200	29.6
LT7545CL-IC	3/4"	4-14	2-1/4"	5/8"	1-9/16"	1-5/8"	140	42.3
LT10045CL-IC	1"	4-14	2-1/2"	11/16"	1-7/8"	1-13/16"	100	66.3
LT12545CL-IC	1-1/4"	4-14	3"	3/4"	2-1/4"	2-3/16"	60	90.4
LT15045CL-IC	1-1/2"	4-14	3-3/16"	3/4"	2-1/2"	2-7/16"	40	113.5
LT20045CL-IC	2"	4-14	3-5/8"	13/16"	3"	2-5/8"	20	180.3
LT25045CL-IC	2-1/2"	1/0-8	7-7/16"	1-1/8"	4-1/16"	4-9/16"	1	587.8
LT30045CL-IC	3"	1/0-8	8-7/16"	1-1/8"	4-7/8"	5-3/8"	1	877.2
LT35045CL-IC	3-1/2"	3/0-6	10-3/16"	1-1/4"	5-7/16"	6-5/8"	1	1309.2
LT40045CL-IC	4"	3/0-6	11-3/4"	1-5/16"	6-1/16"	6-7/8"	1	1554.1



LIQUIDTIGHT

90° Connectors for use with Liquidtight Flexible Metallic Conduit Malleable Iron

Features:

- Tapered threaded male hub - NPT
- Compact, slim diameter with small turning radius
- Steel locknut
- Liquidtight/Raintight/Oiltight/Concrete tight
- Suitable for wet locations
- Long ferrule prevents pullout & tight bend conduit pop out
- RoHS compliant

Standard Materials:

Malleable iron
Steel ferrule
Steel locknut


Standard Finish:

Zinc plated


Applicable Third Party Standards:

UL Standard: 514B
Fed. Spec. W-F-408E
NEMA: FB-1

UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following hazardous locations under NEC 501-4(b), 502-4(a)(2); Class I, Div. 2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2



CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	DIM D	PCS/UNITS PER BOX	WEIGHT PER C
LT3890	3/8"	1/2"	1-1/4"	1/2"	1-3/16"	1-9/16"	200	25.4
LT5090	1/2"	1/2"	1-7/16"	1/2"	1-5/16"	1-9/16"	180	28.9
LT7590	3/4"	3/4"	2"	1/2"	1-9/16"	1-13/16"	120	44.1
LT10090	1"	1"	2-1/8"	5/8"	1-7/8"	2-3/16"	75	74.5
LT12590	1-1/4"	1-1/4"	2-7/8"	5/8"	2-1/4"	2-3/16"	50	96.1
LT15090	1-1/2"	1-1/2"	2-11/16"	3/4"	2-1/2"	2-1/2"	30	121.3
LT20090	2"	2"	3-3/16"	3/4"	3"	2-7/8"	20	176.4
LT25090	2-1/2"	2-1/2"	8-5/16"	1-1/16"	4-1/16"	7-7/8"	1	837.7
LT30090	3"	3"	9-1/2"	1-1/8"	4-7/8"	9-1/2"	1	1234.6
LT35090	3-1/2"	3-1/2"	11-7/16"	1-3/16"	5-7/16"	11-7/8"	1	1896.0
LT40090	4"	4"	13-13/16"	1-3/16"	6-1/16"	12-15/16"	1	2381.0



With Insulated Throat

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	DIM D	PCS/UNITS PER BOX	WEIGHT PER C
LT3890-IC	3/8"	1/2"	1-1/4"	5/8"	1-3/16"	1-9/16"	200	25.7
LT5090-IC	1/2"	1/2"	1-7/16"	5/8"	1-5/16"	1-9/16"	180	29.2
LT7590-IC	3/4"	3/4"	2"	5/8"	1-9/16"	1-13/16"	120	44.6
LT10090-IC	1"	1"	2-1/8"	11/16"	1-7/8"	2-3/16"	75	75.3
LT12590-IC	1-1/4"	1-1/4"	2-7/8"	3/4"	2-1/4"	2-3/16"	50	97.1
LT15090-IC	1-1/2"	1-1/2"	2-11/16"	13/16"	2-1/2"	2-1/2"	30	122.5
LT20090-IC	2"	2"	3-3/16"	13/16"	3"	2-7/8"	20	178.2
LT25090-IC	2-1/2"	2-1/2"	8-5/16"	1-1/8"	4-1/16"	7-7/8"	1	846.1
LT30090-IC	3"	3"	9-1/2"	1-1/4"	4-7/8"	9-1/2"	1	1246.9
LT35090-IC	3-1/2"	3-1/2"	11-7/16"	1-1/4"	5-7/16"	11-7/8"	1	1914.9
LT40090-IC	4"	4"	13-13/16"	1-5/16"	6-1/16"	12-15/16"	1	2404.8

LIQUIDTIGHT

90° Connectors and External Aluminum Grounding Lugs for use with Liquidtight Flexible Metallic Conduit, Malleable Iron

Application:
Connects conduit and terminates bonding connector run externally across liquidtight conduit


- Features:**
- Tapered threaded male hub - NPT
 - Compact, slim diameter with small turning radius
 - Steel locknut
 - Liquidtight/Raintight/Oiltight/Concrete tight
 - Suitable for wet locations
 - Long ferrule prevents pullout & tight bend conduit pop out
 - RoHS compliant

Standard Materials:
Malleable iron
Steel ferrule
Steel locknut


Standard Finish:
Zinc plated

Applicable Third Party Standards:
UL Standard: 514B
UL Standard: 467
Fed. Spec. W-F-408E
NEMA: FB-1

UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following hazardous locations under NEC 501-4(b), 502-4(a)(2); Class I, Div. 2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1 1/4" under NEC 351-1



CATALOG NUMBER	TRADE SIZE	LUG SIZE	DIM A	DIM B	DIM C	DIM D	PCS/UNITS PER BOX	WEIGHT PER C
LT3890AL	3/8"	4-14	1-1/4"	1/2"	1-3/16"	1-9/16"	200	27.6
LT5090AL	1/2"	4-14	1-7/16"	1/2"	1-5/16"	1-9/16"	180	31.1
LT7590AL	3/4"	4-14	2"	1/2"	1-9/16"	1-13/16"	120	46.3
LT10090AL	1"	4-14	2-1/8"	5/8"	1-7/8"	2-3/16"	80	76.7
LT12590AL	1-1/4"	4-14	2-7/8"	5/8"	2-1/4"	2-3/16"	50	98.3
LT15090AL	1-1/2"	4-14	2-11/16"	3/4"	2-1/2"	2-1/2"	30	123.5
LT20090AL	2"	4-14	3-3/16"	3/4"	3"	2-7/8"	20	178.6
LT25090AL	2-1/2"	1/0-8	8-5/16"	1-1/16"	4-1/16"	7-7/8"	1	846.6
LT30090AL	3"	1/0-8	9-1/2"	1-1/8"	4-7/8"	9-1/2"	1	1243.4
LT35090AL	3-1/2"	3/0-6	11-7/16"	1-3/16"	5-7/16"	11-7/8"	1	1913.6
LT40090AL	4"	3/0-6	13-13/16"	1-3/16"	6-1/16"	12-15/16"	1	2398.6



With Insulated Throat

CATALOG NUMBER	TRADE SIZE	LUG SIZE	DIM A	DIM B	DIM C	DIM D	PCS/UNITS PER BOX	WEIGHT PER C
LT3890AL-IC	3/8"	4-14	1-1/4"	5/8"	1-3/16"	1-9/16"	200	27.8
LT5090AL-IC	1/2"	4-14	1-7/16"	5/8"	1-5/16"	1-9/16"	180	31.4
LT7590AL-IC	3/4"	4-14	2"	5/8"	1-9/16"	1-13/16"	120	46.7
LT10090AL-IC	1"	4-14	2-1/8"	11/16"	1-7/8"	2-3/16"	80	77.4
LT12590AL-IC	1-1/4"	4-14	2-7/8"	3/4"	2-1/4"	2-3/16"	50	99.2
LT15090AL-IC	1-1/2"	4-14	2-11/16"	13/16"	2-1/2"	2-1/2"	30	124.7
LT20090AL-IC	2"	4-14	3-3/16"	13/16"	3"	2-7/8"	20	180.3
LT25090AL-IC	2-1/2"	1/0-8	8-5/16"	1-1/8"	4-1/16"	7-7/8"	1	855.0
LT30090AL-IC	3"	1/0-8	9-1/2"	1-1/4"	4-7/8"	9-1/2"	1	1255.8
LT35090AL-IC	3-1/2"	3/0-6	11-7/16"	1-1/4"	5-7/16"	11-7/8"	1	1932.7
LT40090AL-IC	4"	3/0-6	13-13/16"	1-5/16"	6-1/16"	12-15/16"	1	2422.5

LIQUIDTIGHT

90° Connectors with Insulated Throats and External Copper Grounding Lugs for use with Liquidtight Flexible Metallic Conduit Malleable Iron

Application:

Connects conduit and terminates bonding connector run externally across liquidtight conduit.

Features:

- Tapered threaded male hub - NPT
- Compact, slim diameter with small turning radius
- Steel locknut
- Liquidtight/Raintight/Oiltight/Concrete tight
- Suitable for wet locations
- Long ferrule prevents pullout & tight bend conduit pop out
- RoHS compliant

Standard Materials:

Malleable iron
Steel ferrule
Steel locknut


Standard Finish:

Zinc plated

Applicable Third Party Standards:

UL Standard: 514B
UL Standard: 467
Fed. Spec. W-F-408E
NEMA: FB-1

UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following hazardous locations under NEC 501-4(b), 502-4(a)(2); Class I, Div. 2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1 1/4" under NEC 351-1



CATALOG NUMBER	TRADE SIZE	LUG SIZE	DIM A	DIM B	DIM C	DIM D	PCS/UNITS PER BOX	WEIGHT PER C
LT3890CL-IC	3/8"	4-14	1-1/4"	5/8"	1-3/16"	1-9/16"	200	27.8
LT5090CL-IC	1/2"	4-14	1-7/16"	5/8"	1-5/16"	1-9/16"	180	31.4
LT7590CL-IC	3/4"	4-14	2"	5/8"	1-9/16"	1-13/16"	120	46.7
LT10090CL-IC	1"	4-14	2-1/8"	1 1/16"	1-7/8"	2-3/16"	80	77.4
LT12590CL-IC	1-1/4"	4-14	2-7/8"	3/4"	2-1/4"	2-3/16"	50	99.2
LT15090CL-IC	1-1/2"	4-14	2-11/16"	13/16"	2-1/2"	2-1/2"	30	124.7
LT20090CL-IC	2"	4-14	3-3/16"	13/16"	3"	2-7/8"	20	180.3
LT25090CL-IC	2-1/2"	1/0-8	8-5/16"	1-1/8"	4-1/16"	7-7/8"	1	855.0
LT30090CL-IC	3"	1/0-8	9-1/2"	1-1/4"	4-7/8"	9-1/2"	1	1255.8
LT35090CL-IC	3-1/2"	3/0-6	11-7/16"	1-1/4"	5-7/16"	11-7/8"	1	1932.7
LT40090CL-IC	4"	3/0-6	13-13/16"	1-5/16"	6-1/16"	12-15/16"	1	2422.5

LIQUIDTIGHT

SCI New Assembly Installation Connector With Screw-on Ferrule Over Liquidtight Conduit

SCI New Easy Assembly Installation

- A** Slide conduit inside the fully assembled connector.



- B** Turn the connector assembly or the conduit until the ferrule threads engage the spirals in the conduit. The pins in the ferrule are locked inside the holes in the connector body, preventing the ferrule from turning. Tighten the conduit.



- C** Tighten the nut against the connector.




With the New Easy Assembly Installation Liquidtight Time and Money Can Be Saved!

Old Style Assembly Installation


- A** Slide nut over conduit.



- B** Slide compression ring over conduit.




- C** Slide threaded ferrule inside the conduit.




Turn ferrule using bare hand or a tool ...



... until end of conduit is well inside the ferrule.



- D** Slide the conduit assembly inside ...



... the connector.



- E** Slide the compression nut and ring towards the connector...



- F** ... and tighten the nut.



SCREW ON LIQUIDTIGHT

Straight Connectors for use with Liquidtight Flexible Metallic Conduit Malleable Iron

Features:

- **No disassembly required for installation of Screw On Liquidtight**
- Tapered threaded male hub - NPT
- Compact, slim diameter
- Liquidtight/Raintight/Oiltight
- Suitable for wet locations
- Long ferrule prevents pullout & tight bend conduit pop out
- RoHS Compliant

Standard Materials:

Malleable iron
Steel ferrule
Steel locknut

Standard Finish:

Zinc plated


Applicable Third Party

Standards:
UL Standard: 514B
Fed. Spec. W-F-408E
NEMA: FB-1


Winner of the 2006 EC&M Conduit & Cable Fitting Category!

UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following hazardous locations under NEC 501-4(b), 502-4(a)(2); Class I, Div. 2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2.

PATENTED
U.S. Patent No.
7.914.048B2



CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
LTQ38	3/8"	1/2"	1-1/8"	1/2"	1-1/8"	400	15.4
LTQ50	1/2"	1/2"	1-1/4"	1/2"	1-1/4"	300	17.6
LTQ75	3/4"	3/4"	1-1/4"	1/2"	1-9/16"	180	28.7
LTQ100	1"	1"	1-7/16"	5/8"	1-13/16"	150	39.7
LTQ125	1-1/4"	1-1/4"	1-1/2"	11/16"	2-1/4"	100	55.1
LTQ150	1-1/2"	1-1/2"	1-5/8"	3/4"	2-7/16"	70	70.5
LTQ200	2"	2"	1-3/4"	3/4"	3"	50	99.2



With Insulated Throat

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
LTQ38-IC	3/8"	1/2"	1-1/8"	9/16"	1-1/8"	400	15.6
LTQ50-IC	1/2"	1/2"	1-1/4"	9/16"	1-1/4"	300	17.8
LTQ75-IC	3/4"	3/4"	1-1/4"	9/16"	1-9/16"	180	28.9
LTQ100-IC	1"	1"	1-7/16"	11/16"	1-13/16"	150	40.1
LTQ125-IC	1-1/4"	1-1/4"	1-1/2"	3/4"	2-1/4"	100	55.7
LTQ150-IC	1-1/2"	1-1/2"	1-5/8"	13/16"	2-7/16"	70	71.2
LTQ200-IC	2"	2"	1-3/4"	13/16"	3"	50	100.2



Easy Assembly and Installation

SCREW ON LIQUIDTIGHT

45° Connectors for use with Liquidtight Flexible Metallic Conduit Malleable Iron

Features:

- No disassembly required for installation of Screw On Liquidtight
- Tapered threaded male hub - NPT
- Compact, slim diameter
- Liquidtight/Raintight/Oiltight
- Suitable for wet locations
- Long ferrule prevents pullout & tight bend conduit pop out
- RoHS Compliant

Standard Materials:

Malleable iron
Steel ferrule
Steel locknut

Standard Finish:

Zinc plated

Applicable Third Party

Standards:

UL Standard: 514B


Fed. Spec. W-F-408E

NEMA: FB-1


Winner of the 2006 EC&M Conduit & Cable Fitting Category!

UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following hazardous locations under NEC 501-4(b), 502-4(a)(2); Class I, Div. 2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2.

PATENTED
U.S. Patent No.
7.914.048B2



CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	DIM D	PCS/UNITS PER BOX	WEIGHT PER C
LTQ3845	3/8"	1/2"	1-15/16"	1/2"	1-1/8"	1-1/2"	200	27.1
LTQ5045	1/2"	1/2"	2"	1/2"	1-1/4"	1-1/2"	200	27.1
LTQ7545	3/4"	3/4"	2-3/16"	1/2"	1-9/16"	1-9/16"	140	39.7
LTQ10045	1"	1"	2-1/2"	5/8"	1-13/16"	1-13/16"	100	63.5



With Insulated Throat

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	DIM D	PCS/UNITS PER BOX	WEIGHT PER C
LTQ3845-IC	3/8"	1/2"	1-15/16"	9/16"	1-1/8"	1-1/2"	200	27.3
LTQ5045-IC	1/2"	1/2"	2"	9/16"	1-1/4"	1-1/2"	200	27.3
LTQ7545-IC	3/4"	3/4"	2-3/16"	9/16"	1-9/16"	1-9/16"	140	40.1
LTQ10045-IC	1"	1"	2-1/2"	1 1/16"	1-13/16"	1-13/16"	100	64.2

SCREW ON LIQUIDTIGHT

90° Connectors for use with Liquidtight Flexible Metallic Conduit Malleable Iron

Features:

- **No disassembly required for installation of Screw On Liquidtight**
- Tapered threaded male hub - NPT
- Compact, slim diameter
- Liquidtight/Raintight/Oiltight
- Suitable for wet locations
- Long ferrule prevents pullout & tight bend conduit pop out
- RoHS Compliant

Standard Materials:

Malleable iron
Steel ferrule
Steel locknut

Standard Finish:

Zinc plated

Applicable Third Party


Standards:

UL Standard: 514B
Fed. Spec. W-F-408E
NEMA: FB-1


Winner of the 2006 EC&M Conduit & Cable Fitting Category!

UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following hazardous locations under NEC 501-4(b), 502-4(a)(2); Class I, Div. 2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2

PATENTED
U.S. Patent No.
7.914.048B2



CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	DIM D	PCS/UNITS PER BOX	WEIGHT PER C
LTQ3890	3/8"	1/2"	1-5/16"	1/2"	1-1/8"	1-5/8"	200	25.4
LTQ5090	1/2"	1/2"	1-7/16"	1/2"	1-1/4"	1-5/8"	180	28.9
LTQ7590	3/4"	3/4"	1-5/8"	1/2"	1-9/16"	1-3/4"	120	44.1
LTQ10090	1"	1"	2-5/16"	5/8"	1-13/16"	2-1/8"	75	74.5



With Insulated Throat

CATALOG WEIGHT NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	DIM D	PCS/UNITS PER BOX	WEIGHT PER C
LTQ3890-IC	3/8"	1/2"	1-5/16"	9/16"	1-1/8"	1-5/8"	200	25.7
LTQ5090-IC	1/2"	1/2"	1-7/16"	9/16"	1-1/4"	1-5/8"	180	29.2
LTQ7590-IC	3/4"	3/4"	1-5/8"	9/16"	1-9/16"	1-3/4"	120	44.6

LIQUIDTIGHT FITTINGS

LIQUIDTIGHT

Straight & 90° Connectors for use with Liquidtight Flexible Metallic Conduit, Stainless Steel

Features:

- Tapered threaded male hub - NPT
- Compact, slim diameter
- Liquidtight/Raintight/Oiltight
- Suitable for wet locations
- Long ferrule prevents pullout & tight bend conduit pop out
- RoHS Compliant


Standard Materials:

Stainless Steel
Steel ferrule


Applicable Third Party

standards:
UL Standard: 514B
Fed. Spec. W-F-408E
NEMA: FB-1

UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following hazardous locations under NEC 501-4(b), 502-4(a)(2); Class I, Div. 2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2.



CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
LT50SS-IC	1/2"	1/2"	15/16"	1/2"	1-15/16"	25	20.9
LT75SS-IC	3/4"	3/4"	1"	9/16"	1-9/16"	25	27.5
LT100SS-IC	1"	1"	1-1/8"	5/8"	1-15/16"	5	46.3
LT125SS-IC	1-1/4"	1-1/4"	1-1/4"	5/8"	2-3/8"	5	57.2
LT150SS-IC	1-1/2"	1-1/2"	1-5/16"	11/16"	2-5/8"	2	68.1
LT200SS-IC	2"	2"	1-3/8"	3/4"	3-1/16"	1	103.2

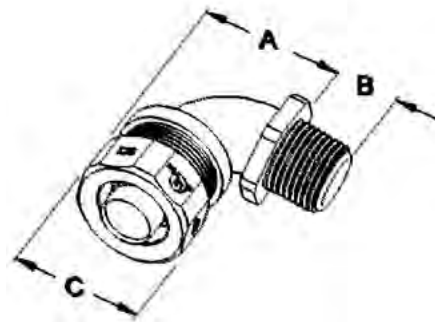

Stainless Steel 90° Fittings

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
LT5090SS-IC	1/2"	1/2"	1-9/16"	1/2"	1-5/16"	25	30.0
LT7590SS-IC	3/4"	3/4"	1-7/8"	9/16"	1-9/16"	10	42.8
LT10090SS-IC	1"	1"	2-3/8"	5/8"	1-15/16"	10	73.1
LT12590SS-IC	1-1/4"	1-1/4"	2-1/2"	5/8"	2-3/8"	5	96.1
LT15090SS-IC	1-1/2"	1-1/2"	3-1/16"	11/16"	2-5/8"	2	103.8
LT20090SS-IC	2"	2"	3-13/16"	3/4"	3-1/16"	1	142.5

* Please see our Sealing Gasket with a Stainless Steel retaining ring on page 135 for use in this application



LIQUIDTIGHT

Tubular Steel Connectors for use with Liquidtight Flexible Metallic Conduit

Features:

- Tapered threaded male hub
- NPT
- Compact, slim diameter
- Liquidtight/Raintight/Oiltight
- Suitable for wet locations
- Long ferrule prevents pullout & tight bend conduit pop out
- RoHS Compliant
- Low cost

Standard Materials:

Steel
Steel ferrule
Steel locknut


Standard Finish:

Zinc plated


Applicable Third Party

Standards:

UL Standard: 514B
Fed. Spec. W-F-408E
NEMA: FB-1



CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
LT38STL	3/8"	1/2"	1"	1/2"	1-1/16"	25	11.4
LT50STL	1/2"	1/2"	1-1/8"	1/2"	1-1/4"	25	16.3
LT75STL	3/4"	3/4"	1-1/8"	1/2"	1-9/16"	25	22.1
LT100STL	1"	1"	1-5/16"	5/8"	1-13/16"	5	35.4
LT125STL	1-1/4"	1-1/4"	1-3/8"	5/8"	2-1/16"	5	41.2
LT150STL	1-1/2"	1-1/2"	1-7/16"	11/16"	2-1/16"	5	50.4
LT200STL	2"	2"	1-1/2"	3/4"	2-3/4"	5	64.5



With Insulated Throat

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
LT38STL-IC	3/8"	1/2"	1"	9/16"	1-1/16"	25	11.7
LT50STL-IC	1/2"	1/2"	1-1/8"	9/16"	1-1/4"	25	16.6
LT75STL-IC	3/4"	3/4"	1-1/8"	9/16"	1-9/16"	25	22.6
LT100STL-IC	1"	1"	1-5/16"	11/16"	1-13/16"	5	36.2
LT125STL-IC	1-1/4"	1-1/4"	1-3/8"	11/16"	2-1/16"	5	42.4
LT150STL-IC	1-1/2"	1-1/2"	1-7/16"	3/4"	2-1/16"	5	51.8
LT200STL-IC	2"	2"	1-1/2"	13/16"	2-3/4"	5	66.0



LIQUIDTIGHT

Raintight Tubular Steel Connectors for use with Liquidtight Flexible Metallic Conduit to EMT

Application:

To connect Liquidtight flexible metallic conduit to EMT. EMT is Raintight.

Features:


- Raintight
- Compact, slim diameter
- Liquidtight/Raintight/Oiltight
- Suitable for wet locations
- Long ferrule prevents pullout & tight bend conduit pop out
- RoHS Compliant
- Low cost

Standard Materials:

Steel
Steel ferrule
Steel locknut
Nylon compression ring

Standard Finish:

Zinc plated



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
LT50RT	1/2"	1-15/16"	1-1/4"	180	20.0
LT75RT	3/4"	2-1/16"	1-9/16"	120	27.1
LT100RT	1"	2-1/4"	1-13/16"	75	42.3

PATENTED
U.S. Patent No.
8.129.633B1

SPACE SAVER LIQUIDTIGHT

Straight Connectors for use with Liquidtight Flexible Metallic Conduit Malleable Iron

Features:

- Compact, Slim Diameter
- Steel Locknut
- Liquidtight/Raintight/Oiltight/Concrete tight
- Suitable for Wet Locations
- Long Ferrule Prevents Pullout & Tight Bend Conduit Pop Out
- RoHS compliant

Standard Materials:

Malleable Iron
Steel Ferrule
Rubber Gasket
Aluminum Lug

Standard Finish:


Zinc Plated

Applicable Third Party


Standards:

UL Standard: 514B
Fed. Spec. W-F-408E
NEMA: FB-1

UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following hazardous locations under NEC 501-4(b), 502-4(a)(2); Class I, Div. 2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1 1/4" under NEC 351-1



CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
SSLT38	3/8"	1/2"	1-3/8"	1-3/16"	400	18.8
SSLT50	1/2"	1/2"	1-3/8"	1-5/16"	300	21.3
SSLT75	3/4"	3/4"	1-1/2"	1-9/16"	180	31.2
SSLT100	1"	1"	1-5/8"	1-7/8"	150	43.8

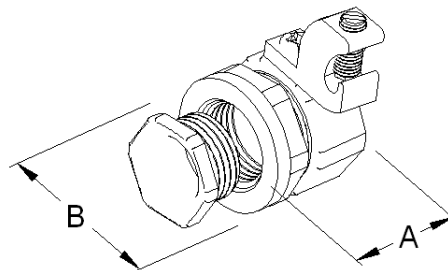

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
SSLT38AL	3/8"	1/2"	1-3/8"	1-3/16"	3/4"	400	23.2
SSLT50AL	1/2"	1/2"	1-3/8"	1-5/16"	3/4"	300	25.7
SSLT75AL	3/4"	3/4"	1-1/2"	1-9/16"	3/4"	180	35.6
SSLT100AL	1"	1"	1-5/8"	1-7/8"	3/4"	150	48.2

LIQUIDTIGHT

Combination Couplings for use with Liquidtight Flexible Metallic Conduit to Threaded Rigid/IMC, Malleable Iron

Application:
To connect Liquidtight hose to Rigid conduit.

Features:

- Female hub - NPSM
- Liquidtight/Raintight/Oiltight
- Suitable for wet locations
- Suitable for grounding
- Long ferrule prevents pullout & tight bend conduit pop out
- RoHS compliant

Standard Materials:

Malleable iron
Steel ferrule


Standard Finish:

Zinc plated


Applicable Third Party Standards:

UL Standard: 514B
UL Standard: 467
Fed. Spec. W-F-408E
NEMA: FB-1

UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following hazardous locations under NEC 501-4(b), 502-4(a)(2); Class I, Div. 2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1 1/4" under NEC 351-1



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
RLT38	3/8"	7/8"	3/4"	1-3/16"	300	17.6
RLT50	1/2"	7/8"	3/4"	1-5/16"	250	24.3
RLT75	3/4"	7/8"	3/4"	1-5/8"	200	30.9
RLT100	1"	1"	13/16"	1-7/8"	110	48.5
RLT125	1-1/4"	1-1/8"	7/8"	2-1/4"	60	63.9
RLT150	1-1/2"	1-1/8"	7/8"	2-1/2"	45	72.8
RLT200	2"	1-1/4"	15/16"	3"	36	101.4

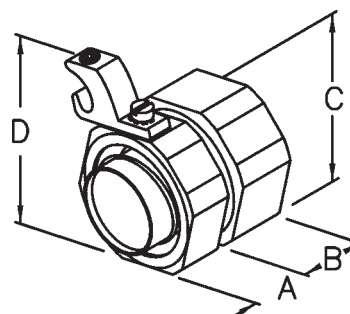

With External Aluminum Grounding Lug

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	DIM D	PCS/UNITS PER BOX	WEIGHT PER C
RLT38AL	3/8"	7/8"	3/4"	1-3/16"	1-15/16"	250	19.7
RLT50AL	1/2"	7/8"	3/4"	1-5/16"	2-1/16"	250	26.4
RLT75AL	3/4"	7/8"	3/4"	1-5/8"	2-3/8"	150	33.0
RLT100AL	1"	1"	13/16"	1-7/8"	2-5/8"	110	50.6
RLT125AL	1-1/4"	1-1/8"	7/8"	2-1/4"	3"	60	66.0
RLT150AL	1-1/2"	1-1/8"	7/8"	2-1/2"	3-1/4"	45	74.9
RLT200AL	2"	1-1/4"	15/16"	3"	3-3/4"	36	103.5



LIQUIDTIGHT

Wire Mesh Grips for Liquidtight Fittings

Application:

To connect to enclosures and prevent conduit pullout when subjected to motion or strain.

Features:

- Wire mesh prevents pullout and tight end conduit pop-out
- Suitable for grounding
- RoHS compliant

Standard Materials:

Malleable iron nut
Aluminum ring
Stainless steel wire mesh

Standard Finish:

Malleable iron - Zinc plated

Applicable Third Party

Standards:

UL Standard: 514B
Fed. Spec. W-F-406E
NEMA: FB-1



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
KGL38	3/8"	5"	1-3/16"	6-1/8"	144	10.6
KGL50	1/2"	5-13/16"	1-5/16"	6-7/8"	132	11.8
KGL75	3/4"	6-13/16"	1-9/16"	7-15/16"	54	21.2
KGL100	1"	8"	1-7/8"	9-5/16"	36	23.1
KGL125	1-1/4"	10-5/8"	2-1/4"	12"	24	40.6
KGL150	1-1/2"	11-1/2"	2-1/2"	13-1/16"	18	48.8
KGL200	2"	13-1/2"	3"	15-3/16"	10	68.1



LIQUIDTIGHT

Wire Mesh Grips with Insulated Throat Liquidtight Fittings Attached

Application:

To connect to enclosures and prevent conduit pullout when subjected to motion or strain.

Features:

- Wire mesh prevents pullout and tight end conduit pop-out
- Suitable for grounding
- RoHS compliant

Standard Materials:

Malleable iron Liquidtight fitting with steel locknut
Malleable iron nut
Aluminum ring
Stainless steel wire mesh


Standard Finish:

Malleable iron - Zinc plated
Steel locknuts - Zinc plated

Applicable Third Party

Standards:

UL Standard: 514B
Fed. Spec. W-F-406E
NEMA: FB-1

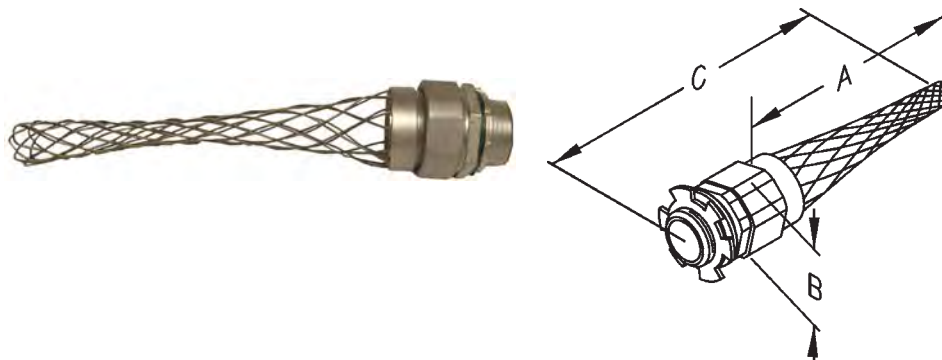

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	WEIGHT PER C
KGL38LT-IC	3/8"	5"	1-3/16"	6-7/8"	20.0
KGL50LT-IC	1/2"	5-13/16"	1-5/16"	7-5/8"	21.2
KGL75LT-IC	3/4"	6-13/16"	1-9/16"	8-3/4"	39.3
KGL100LT-IC	1"	8"	1-7/8"	10-1/4"	49.4
KGL125LT-IC	1-1/4"	10-5/8"	2-1/4"	13"	77.5
KGL150LT-IC	1-1/2"	11-1/2"	2-1/2"	14-1/8"	94.4
KGL200LT-IC	2"	13-1/2"	3"	16-1/16"	131.2



LIQUIDTIGHT

Wire Mesh Grips with Insulated Throat Liquidtight 45° Fittings Attached

Application:

To connect to enclosures and prevent conduit pullout when subjected to motion or strain.

Features:

- Wire mesh prevents pullout and tight end conduit pop-out
- Suitable for grounding
- RoHS compliant

Standard Materials:

Malleable iron Liquidtight fitting

with steel locknut

Malleable iron nut

Aluminum ring

Stainless steel wire mesh

Malleable iron - Zinc plated

Steel locknuts - Zinc plated


Applicable Third Party

Standards:

UL Standard: 514B

Fed. Spec. W-F-406E

NEMA: FB-1

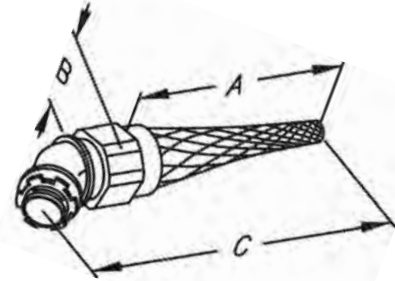

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	WEIGHT PER C
KGL3845LT-IC	3/8"	5"	1-3/16"	6-1/2"	26.9
KGL5045LT-IC	1/2"	5-13/16"	1-5/16"	7-1/4"	30.6
KGL7545LT-IC	3/4"	5-13/16"	1-9/16"	9-9/16"	49.3
KGL10045LT-IC	1"	8"	1-7/8"	10-15/16"	69.9
KGL12545LT-IC	1-1/4"	10-5/8"	2-1/4"	13-7/8"	106.2
KGL15045LT-IC	1-1/2"	11-1/2"	2-1/2"	15-1/16"	130.7
KGL20045LT-IC	2"	13-1/2"	3"	17-9/16"	199.4



LIQUIDTIGHT

Wire Mesh Grips with Insulated Throat Liquidtight 90° Fittings Attached

Application:

To connect to enclosures and prevent conduit pullout when subjected to motion or strain.

Features:

- Wire mesh prevents pullout and tight end conduit pop-out
- Suitable for grounding
- RoHS compliant

Standard Materials:

Malleable iron Liquidtight fitting with steel locknut

Malleable iron nut

Aluminum ring

Stainless steel wire mesh

Standard Finish:

Malleable iron - Zinc plated

Steel locknuts - Zinc plated

Applicable Third Party

Standards:

UL Standard: 514B

Fed. Spec. W-F-406E

NEMA: FB-1



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	WEIGHT PER C
KGL3890LT-IC	3/8"	5"	1-3/16"	7"	30.6
KGL5090LT-IC	1/2"	5-13/16"	1-5/16"	7-3/4"	32.4
KGL7590LT-IC	3/4"	6-13/16"	1-9/16"	8-15/16"	54.9
KGL10090LT-IC	1"	8"	1-7/8"	10-1/2"	81.2
KGL12590LT-IC	1-1/4"	10-5/8"	2-1/4"	13-3/16"	111.2
KGL15090LT-IC	1-1/2"	11-1/2"	2-1/2"	14-1/2"	148.8
KGL20090LT-IC	2"	13-1/2"	3"	16-7/8"	205.6



LIQUIDTIGHT

Steel Ferrules for use with Steel Components Liquidtight Fittings

Features:

- Long ferrule prevents pullout & tight bend conduit pop out
- Use for Steel Components malleable iron Liquidtight fittings only

Standard Materials:

Steel ferrule

Standard Finish:

Zinc plated

Applicable Third Party

Standards:

UL Standard: 514B

Fed. Spec. W-F-408E

NEMA: FB-1



CATALOG NUMBER	TRADE SIZE	PCS/UNITS PER BOX	WEIGHT PER C
LT38FSCI	3/8"	2000	1.9
LT50FSCI	1/2"	1500	2.2
LT75FSCI	3/4"	900	2.5
LT100FSCI	1"	500	3.1
LT125FSCI	1-1/4"	250	5.0
LT150FSCI	1-1/2"	200	6.3
LT200FSCI	2"	100	8.1
LT250FSCI	2-1/2"	80	21.3
LT300FSCI	3"	50	27.5
LT350FSCI	3-1/2"	40	31.3
LT400FSCI	4"	30	34.4
LT500FSCI	5"	20	43.8
LT600FSCI	6"	15	49.4

LIQUIDTIGHT

Steel Ferrules for Screw on Liquidtight Fittings

Features:

- Long ferrule prevents pullout & tight bend conduit pop out
- Use for Steel Components

Standard Materials:

Steel ferrule

Standard Finish:

Zinc plated

Applicable Third Party Standards:

UL Standard: 514B
Fed. Spec. W-F-408E
NEMA: FB-1



CATALOG NUMBER	TRADE SIZE	PCS/UNITS PER BOX	WEIGHT PER C
LTQ38F	3/8"	2000	1.9
LTQ50F	1/2"	1500	2.2
LTQ75F	3/4"	900	2.5
LTQ100F	1"	500	3.1
LTQ125F	1-1/4"	200	5.0
LTQ150F	1-1/2"	180	6.3
LTQ200F	2"	100	8.1

PATENTED
U.S. Patent No.
7.914.048B2



FLEX - AC - MC FITTINGS

Steel Space Saver Double Bite Saddle Type Connectors
 45 and 90 degree Double Bite Saddle Type Connectors
 Double Bite Saddle Type Set Screw Couplings
 Double Bite Saddle Type Connectors
 Double Bite Saddle Type Compression Couplings
 Quicklock Type Connectors
 Straight, 45, and 90 degree Squeeze Connectors
 Duplex Squeeze Connectors
 Combination Couplings

FLEX - AC - MCI

Squeeze Connectors Malleable Iron for Flex • AC • MCI • MCI-A cables

Application:
For armored cable, flexible metal conduit, interlocked metal clad cables, HCF cables.



Features:

- Male hub threads - NPSM
- RoHS compliant


Standard Materials:
Malleable iron
Steel locknut

Standard Finish:
Zinc plated
> 2-1/2" to 4" zinc plated & painted


Applicable Third Party Standards:
UL Standard: 514B
Fed. Spec. W-F-406E
NEMA: FB-1




3/8" Size is manufactured as shown above.



Sizes 1/2" - 1-1/4" are manufactured as shown above.



Sizes 1-1/2" - 3" are manufactured as shown above.



Sizes 3-1/2" - 4" are manufactured as shown above.

	CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
*	MSC38	3/8"	1/2"	1"	7/16"	1-5/8"	570	5.6
*	MSC50	1/2"	1/2"	1"	7/16"	1-5/8"	330	13.3
	MSC75	3/4"	3/4"	1-1/8"	1/2"	1-3/4"	240	16.7
	MSC100	1"	1"	1-1/8"	9/16"	2-1/8"	120	25.9
	MSC125	1-1/4"	1-1/4"	1-3/16"	9/16"	2-3/16"	120	39.8
	MSC150	1-1/2"	1-1/2"	1-7/8"	5/8"	2-1/4"	100	63.0
	MSC200	2"	2"	2"	3/4"	2-11/16"	33	107.2
>	MSC250	2-1/2"	2-1/2"	2-1/16"	7/8"	3-5/16"	36	171.9
>	MSC300	3"	3"	2-1/8"	1-1/16"	3-7/8"	24	202.6
>	MSC350	3-1/2"	3-1/2"	3-3/4"	1-5/16"	6-1/2"	8	442.0
>	MSC400	4"	4"	4-1/8"	1-1/2"	7-1/4"	8	663.0

With Insulated Throat

	CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
*	MSC38-IC	3/8"	1/2"	1"	1/2"	1-5/8"	570	5.7
*	MSC50-IC	1/2"	1/2"	1"	1/2"	1-5/8"	330	13.4
	MSC75-IC	3/4"	3/4"	1-1/8"	9/16"	1-3/4"	240	16.9
	MSC100-IC	1"	1"	1-1/8"	5/8"	2-1/8"	120	26.2
	MSC125-IC	1-1/4"	1-1/4"	1-3/16"	5/8"	2-3/16"	120	40.2
	MSC150-IC	1-1/2"	1-1/2"	1-7/8"	11/16"	2-1/4"	100	63.6
	MSC200-IC	2"	2"	2"	13/16"	2-11/16"	33	108.2
>	MSC250-IC	2-1/2"	2-1/2"	2-1/16"	15/16"	3-5/16"	36	173.6
>	MSC300-IC	3"	3"	2-1/8"	1-1/8"	3-7/8"	24	204.6
>	MSC350-IC	3-1/2"	3-1/2"	3-3/4"	1-3/8"	6-1/2"	8	446.4
>	MSC400-IC	4"	4"	4-1/8"	1-9/16"	7-1/4"	8	669.6

FLEX - AC - MCI

45° Squeeze Connectors Malleable Iron for Flex • AC • MCI • MCI-A cables

Application:

For armored cable, flexible metal conduit, interlocked metal clad cables, HCF cables.

Features:

- Male hub threads - NPSM
- RoHS compliant

Standard Materials:

Malleable iron
Steel locknuts
Stamped steel covers


Standard Finish:

Zinc plated


Applicable Third Party

Standards:

UL Standard: 514B
Fed. Spec. W-F-406E
NEMA: FB-1



CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
* MSC3845	3/8"	1/2"	1-3/4"	7/16"	1-1/4"	50	10.2
* MSC5045	1/2"	1/2"	1-15/16"	7/16"	1-3/4"	25	12.2
* MSC7545	3/4"	3/4"	1-15/16"	1/2"	2"	25	15.0



CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
* MSC3845-IC	3/8"	1/2"	1-3/4"	3/4"	1-1/4"	50	10.5
* MSC5045-IC	1/2"	1/2"	1-15/16"	3/4"	1-3/4"	25	12.5
* MSC7545-IC	3/4"	3/4"	1-15/16"	9/16"	2"	25	15.2



FLEX - AC - MCI

90° Squeeze Connectors Malleable Iron for Flex • AC • MCI • MCI-A cables

Application:
For armored cable, flexible metal conduit, interlocked metal clad cables, HCF cables.


Features:

- Male hub threads - NPSM
- RoHS compliant


Standard Materials:
Malleable iron
Steel locknut
^ Stamped steel covers

Standard Finish:
Zinc plated
>2-1/2" to 4" zinc plated & painted

UL Standard: 514B
Fed. Spec. W-F-406E
NEMA: FB-I

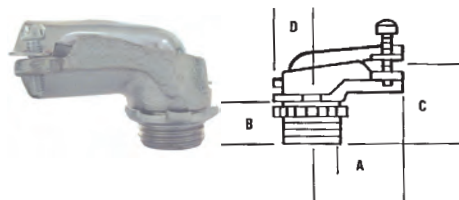


Sizes 3/8" - 3/4" are manufactured as shown above.



Sizes 1" - 2" are manufactured as shown above.

	CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	DIM D	PCS/UNITS PER BOX	WEIGHT PER C
^ *	MSC3890	3/8"	1/2"	1-5/8"	7/16"	7/8"	1/2"	350	8.7
^	MSC5090	1/2"	1/2"	1-5/8"	7/16"	7/8"	1/2"	220	19.8
^ *	MSC7590	3/4"	3/4"	1-13/16"	1/2"	1-1/8"	5/8"	150	24.5
	MSC10090	1"	1"	2-1/8"	1/2"	1-5/16"	13/16"	64	62.2
	MSC12590	1-1/4"	1-1/4"	2-3/4"	5/8"	1-13/16"	1-1/8"	30	119.7
	MSC15090	1-1/2"	1-1/2"	3-3/8"	5/8"	1-13/16"	1-1/2"	24	149.2
	MSC20090	2"	2"	5"	13/16"	2-3/4"	1-11/16"	10	309.4
>	MSC25090	2-1/2"	2-1/2"	5-1/2"	1"	4-1/8"	2"	6	361.6
>	MSC30090	3"	3"	6-5/8"	1"	4-1/2"	2-1/4"	6	552.5
>	MSC35090	3-1/2"	3-1/2"	8-1/4"	1-5/16"	5-9/16"	3-1/8"	4	1215.5
>	MSC40090	4"	4"	9-5/16"	1-1/2"	7"	3-7/16"	1	1436.5



Sizes 2-1/2" - 4" are manufactured as shown on the left

With Insulated Throat

	CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	DIM D	PCS/UNITS PER BOX	WEIGHT PER C
^ *	MSC3890-IC	3/8"	1/2"	1-5/8"	1/2"	7/8"	1/2"	350	8.8
^	MSC5090-IC	1/2"	1/2"	1-5/8"	1/2"	7/8"	1/2"	220	19.0
^ *	MSC7590-IC	3/4"	3/4"	1-13/16"	9/16"	1-1/8"	5/8"	150	17.9
	MSC10090-IC	1"	1"	2-1/8"	9/16"	1-5/16"	13/16"	64	62.8
	MSC12590-IC	1-1/4"	1-1/4"	2-3/4"	11/16"	1-13/16"	1-1/8"	30	120.8
	MSC15090-IC	1-1/2"	1-1/2"	3-3/8"	11/16"	1-13/16"	1-1/2"	24	150.7
	MSC20090-IC	2"	2"	5"	7/8"	2-3/4"	1-11/16"	10	312.5
>	MSC25090-IC	2-1/2"	2-1/2"	5-1/2"	1-1/16"	4-1/8"	2"	6	365.2
>	MSC30090-IC	3"	3"	6-5/8"	1-1/16"	4-1/2"	2-1/4"	6	558.0
>	MSC35090-IC	3-1/2"	3-1/2"	8-1/4"	1-3/8"	5-9/16"	3-1/8"	4	1127.6
>	MSC40090-IC	4"	4"	9-5/16"	1-9/16"	7"	3-7/16"	1	1450.8



FLEX - AC - MCI

Squeeze Connectors, Duplex Squeeze Connectors and 90° Duplex Squeeze Connectors Malleable Iron for Flex • AC • MCI • MCI-A cables

Application:

For armored cable, flexible metal conduit, interlocked metal clad cables, HCF cables.

Features:

- Male hub threads - NPSM
- Provided with steel locknuts
- RoHS compliant

Standard Materials:

Malleable iron
Steel locknut
* Stamped steel covers


Standard Finish:

Zinc plated

Applicable Third Party


Standards:

UL Standard: 514B
Fed. Spec. W-F-406E
NEMA: FB-1




Squeeze Connectors

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
BX38	3/8"	1/2"	1"	7/16"	1-1/8"	100	7.3



Duplex Squeeze Connectors

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
* BX38D	3/8"	1/2"	1-11/16"	7/16"	1-5/8"	25	14.1



90° Duplex Squeeze Connectors

CATALOG NUMBER	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
* MSC389OD	3/8"	1/2"	1-3/16"	7/16"	7/8"	25	14.1



FLEX - AC - MCI

Squeeze Connector Flex • AC • MC • MCI-A Cable Selection Guide

Selection guide for all approved cables to be used with SCI Squeeze Connectors.

MSC Straight

CABLE TYPE	TRADE SIZE 3/8"	TRADE SIZE 1/2"
AC STEEL	12/4 (.520 - .575 dia)	
AC STEEL HCF	(.520 - .575 dia)	
AC ALUMINUM	12/4 (.520 - .560 dia)	
AC ALUM HCF	(.520 - .560 dia)	
MCI STEEL	12/3 (.500 - .539 dia)	
MCI ALUMINUM	14/4 (.494 - .503 dia)	6/3 (.840 - .870 dia)
MCI-A	12/4, 10/2, 10/3, 10/4, 8/2 (.500 - .590 dia)	8/4 (.760 - .800 dia)
MCI-A HCF	(.500 - .610 dia)	(0.760 - .800 dia)
Flex Conduit	3/8"	1/2"

CABLE TYPE	TRADE SIZE 3/4"	TRADE SIZE 1"
AC STEEL		
AC STEEL HCF		
AC ALUMINUM		2/4 (1.335 - 1.380 dia)
AC ALUM HCF		(1.335 - 1.380 dia)
MCI STEEL		
MCI ALUMINUM		2/4 (1.250 - 1.380)
MCI-A	6/4 (1.045 - 1.110 dia)	
MCI-A HCF	(1.045 - 1.110 dia)	
Flex Conduit	3/4"	1"

CABLE TYPE	TRADE SIZE 1-1/4"	TRADE SIZE 1-1/2"	TRADE SIZE 2"
MCI ALUMINUM	3-3/0 (1.485 - 1.600 dia)		
Flex Conduit	1-1/4"	1-1/2"	2"

CABLE TYPE	TRADE SIZE 2-1/2"	TRADE SIZE 3"	TRADE SIZE 3-1/2"	TRADE SIZE 4"
MCI ALUMINUM		4-900 (3.220 - 3.550 dia)		
Flex Conduit	2-1/2"	3"	3-1/2"	4"

MSC 45°

CABLE TYPE	TRADE SIZE 3/8"	TRADE SIZE 1/2"
AC STEEL	14/2, 14/3, 14/4, 12/2, 12/3, 12/4 (.470 - .550 dia)	
AC STEEL HCF	(.470 - .550 dia)	
AC ALUMINUM	14/2, 14/3, 14/4, 12/2, 12/3, 12/4 (.470 - .550 dia)	
AC ALUM HCF	(.470 - .550 dia)	
MCI STEEL	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3, 10/4, 8/2 (.470 - .640 dia)	
MCI ALUMINUM	14/4, 12/2, 12/3, 12/4, 10/2, 10/3, 10/4, 8/2 (.500 - .630 dia)	
MCI-A	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3, 10/4, 8/2 (.400 - .630 dia)	
MCI-A HCF	(.400 - .630 dia)	
Flex Conduit	3/8"	1/2"

CABLE TYPE	TRADE SIZE 3/4"
AC STEEL	4/3 (.980 - 1.010 dia)
AC STEEL HCF	(.980 - 1.010 dia)
AC ALUMINUM	4/3 (.980 - 1.010 dia)
AC ALUM HCF	(.980 - 1.010 dia)
MCI STEEL	6/4, 4/3 (.950 - 1.020 dia)
MCI ALUMINUM	6/4, 4/3 (.950 - 1.020 dia)
MCI-A	6/4 (1.050 - 1.110 dia)
MCI-A HCF	(1.050 - 1.110 dia)
Flex Conduit	3/4"

FLEX - AC - MCI

Squeeze Connector Flex • AC • MCI • MCI-A Cable Selection Guide

Selection guide for all approved cables to be used with SCI Squeeze Connectors.

MSC 90°

CABLE TYPE	TRADE SIZE 3/8"	TRADE SIZE 1/2"
AC STEEL	14/2, 14/3, 14/4, 12/2, 12/3, 12/4 (.460 - .550 dia)	
AC STEEL HCF	(.460 - .550 dia)	
AC ALUMINUM	14/2, 14/3, 14/4, 12/2, 12/3, 12/4 (.460 - .550 dia)	
AC ALUM HCF	(.460 - .550 dia)	
MCI STEEL	12/3, 12/4, 10/2, 10/3, 10/4, 8/2 (.500 - .630 dia)	
MCI ALUMINUM	14/4, 12/2, 12/3, 12/4, 10/2, 10/3, 10/4, 8/2 (.500 - .640 dia)	
MCI-A	14/4, 12/2, 12/3, 12/4, 10/2, 10/3, 10/4, 8/2 (.500 - .640 dia)	
MCI-A HCF	(.500 - .640 dia)	
Flex Conduit	3/8"	1/2"

CABLE TYPE	TRADE SIZE 3/4"	TRADE SIZE 1"
AC STEEL	6/4, 4/3 (.920 - 1.100 dia)	
AC STEEL HCF	(.920 - 1.100)	
AC ALUMINUM	6/4, 4/3 (.920 - 1.100 dia)	2/4 (1.335 - 1.360 dia)
AC ALUM HCF	(.920 - 1.100 dia)	(1.335 - 1.360 dia)
MCI STEEL	6/3 (.840 - .900 dia)	
MCI ALUMINUM	6/3, 6/4, 4/3 (.880 - 1.030 dia)	2/4 (1.250 - 1.360)
MCI-A	6/4 (1.045 - 1.110 dia)	
MCI-A HCF	(1.045 - 1.110 dia)	
Flex Conduit	3/4"	1"

CABLE TYPE	TRADE SIZE 1-1/4"	TRADE SIZE 1-1/2"	TRADE SIZE 2"
MCI ALUMINUM	3-3/0 (1.485 - 1.600 dia)		
Flex Conduit	1-1/4"	1-1/2"	2"

CABLE TYPE	TRADE SIZE 2-1/2"	TRADE SIZE 3"	TRADE SIZE 3-1/2"	TRADE SIZE 4"
MCI ALUMINUM	4/500 (2.500 - 3.000 dia)	4/750 (3.160 - 3.500 dia)		
Flex Conduit	2-1/2"	3"	3-1/2"	4"

90° Duplex

CABLE TYPE	TRADE SIZE 3/8"
AC STEEL	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3 (.470 - .630 dia)
AC STEEL HCF	(.470 - .630 dia)
AC ALUMINUM	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3 (.460 - .625 dia)
AC ALUM HCF	(.460 - .625 dia)
MCI STEEL	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2 (.485 - .545 dia)
MCI ALUMINUM	14/2, 14/3, 14/4, 12/2, 12/3, 12/4 (.435 - .500 dia)
MCI-A	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3, 10/4, 8/2 (.400 - .610 dia)
MCI-A HCF	(.400 - .610 dia)
Flex Conduit	3/8"

FLEX - AC - MCI

Squeeze Connector Flex • AC • MCI • MCI-A Cable Selection Guide

Selection guide for all approved cables to be used with SCI Squeeze Connectors.

BX38D

CABLE TYPE	TRADE SIZE 3/8"
AC STEEL	14/2, 14/3, 14/4, 12/2, 12/3, 12/4 (.470 - .560 dia)
AC STEEL HCF	(.470 - .560 dia)
AC ALUMINUM	14/2, 14/3, 14/4, 12/2, 12/3, 12/4 (.470 - .560 dia)
AC ALUM HCF	(.470 - .560 dia)
MCI STEEL	14/2, 14/3, 14/4, 12/2 (.470 - .500 dia)
MCI ALUMINUM	
MCI-A	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3, 10/4, 8/2 (.400 - .610 dia)
MCI-A HCF	(.400 - .610 dia)
Flex Conduit	3/8"

BX38

CABLE TYPE	TRADE SIZE 3/8"
AC STEEL	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3 (.470 - .630 dia)
AC STEEL HCF	(.470 - .630 dia)
AC ALUMINUM	12/2, 12/3, 12/4, 10/2, 10/3 (.510 - .625 dia)
AC ALUM HCF	(.510 - .625 dia)
MCI STEEL	12/2, 12/3, 12/4, 10/2 (.490 - .525 dia)
MCI ALUMINUM	12/2, 12/3, 12/4, 10/2 (.485 - .545 dia)
MCI-A	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3, 10/4 (.400 - .590 dia)
MCI-A HCF	(.400 - .590 dia)
Flex Conduit	3/8"

FLEX TO RIGID

Combination Couplings Malleable Iron for Flex to Rigid

Application:
To connect Flexible metal
conduit to Rigid or IMC conduit


Features:

- Female hub threads - NPT
- RoHS compliant

Standard Materials:
Malleable iron

Standard Finish:
Zinc plated

**Applicable Third Party
Standards:**
UL Standard: 514B
Fed. Spec. W-F-406E
NEMA: FB-1

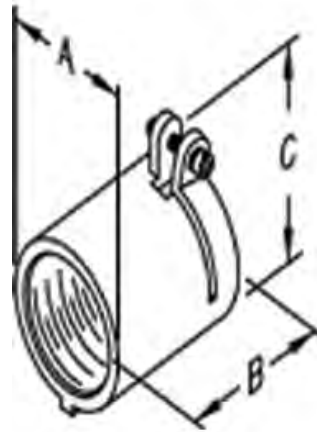

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
65-50	1/2"	1-3/16"	1-1/2"	1-11/16"	10	15.4
66-75	3/4"	1-3/8"	1-3/4"	1-7/8"	10	22.1
67-100	1"	1-5/8"	1-13/16"	2-5/16"	5	33.1
68-125	1-1/4"	2"	2-5/16"	2-5/8"	5	33.1



FLEX - AC - MCI

Quicklock Type Connectors with Insulated Throats for Flex • AC • MCI • MCI-A cables

Application:
For connecting Flex, AC, MCI, MCI-A and HCF cable


Features:

- No locknut required
- Single-unit or duplex construction with captive clamp
- Easy to install. Just tilt, insert and snap down
- Single unit construction eliminates loose component parts, integral green plastic insulated throat bushing provides maximum protection for wire installation
- RoHS compliant

Standard Materials:
Steel

Standard Finish:
Zinc plated

Applicable Third Party Standards:
UL Standard: 514B
Fed. Spec. W-F-406E

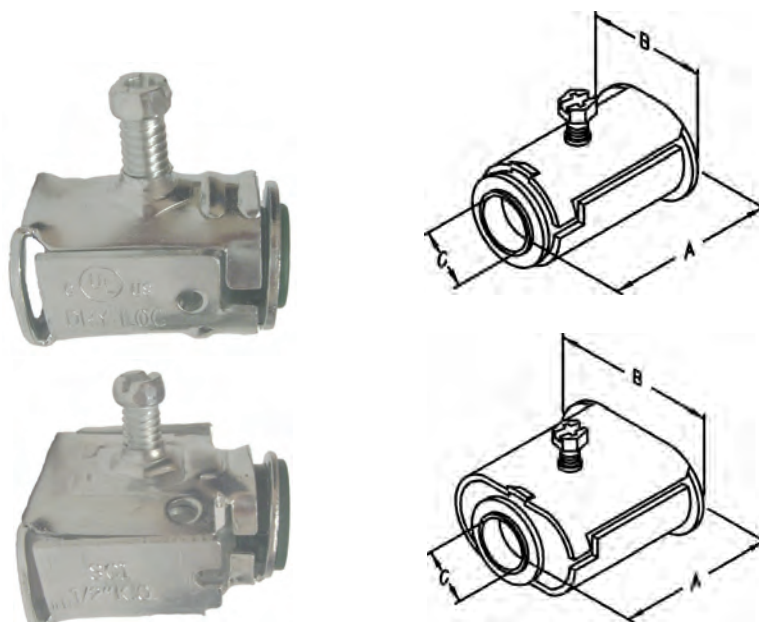

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
QL-50	1/2" Single	1-7/16"	7/8"	7/16"	500	7.5
QL-75	3/4" Single	1-11/16"	1-5/16"	9/16"	125	14.4
QL-50D **	1/2" Duplex	1-5/8"	1-11/16"	9/16"	125	10.2

CABLE TYPE	QL-50 1/2" KO - TRADE SIZE 1/2"
AC STEEL	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3 (.470 - .630 dia)
AC STEEL HCF	(.470 - .630 dia)
AC ALUMINUM	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2 (.480 - .580 dia)
AC ALUM HCF	(.480 - .560 dia)
MCI STEEL	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3 (.410 - .610 dia)
MCI ALUMINUM	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3 (.410 - .610 dia)
MCI-A	12/4, 10/2, 10/3, 10/4 (.500 - .610 dia)
MCI-A HCF	(.500 - .610 dia)
Flex Conduit	3/8"

CABLE TYPE	QL-75 3/4" KO - TRADE SIZE 3/4"
AC STEEL	10/4, 8/2, 8/3, 8/4, 6/3 (.635 - .870 dia)
AC STEEL HCF	(.635 - .870 dia)
AC ALUMINUM	10/4, 8/2, 8/3, 8/4 (.655 - .810 dia)
AC ALUM HCF	(.655 - .810 dia)
MCI STEEL	10/3, 10/4, 8/2, 8/3 (.562 - .725 dia)
MCI ALUMINUM	10/3, 10/4, 8/2, 8/3 (.572 - .730 dia)
MCI-A	8/2, 8/3, 8/4 (.610 - .760 dia)
MCI-A HCF	(.610 - .760 dia)
Flex Conduit	1/2"

CABLE TYPE	QL-50D 1/2" KO - TRADE SIZE 1/2" DUAL
AC STEEL	14/2, 14/3, 14/4, 12/2, 12/3, 12/4 (.470 - .575 dia)
AC STEEL HCF	(.470 - .575 dia)
AC ALUMINUM	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2 (.480 - .580 dia)
AC ALUM HCF	(.480 - .560 dia)
MCI STEEL	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3 (.410 - .610 dia)
MCI ALUMINUM	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3 (.410 - .610 dia)
MCI-A	14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3, 10/4, 8/2 (.410 - .610 dia)
MCI-A HCF	(.410 - .610 dia)
Flex Conduit	3/8"

** Accepts 2 cables of each size listed.

FLEX - AC - MCI

Double Bite Saddle Type Connectors with Insulated Throats Tubular Steel for Flex • AC • MCI • MCI-A cables

Application:
To connect Flex, AC, MCI
MCI-A and HCF cables to outlet
boxes.

Features:

- One piece tubular construction affording extra strength
- Dual gripping saddle clamps
- Saddle clamp rides up & down on screw for ease of installation
- Furnished with insulated throat
- RoHS compliant

Standard Materials:

Tubular steel
Steel locknut

Standard Finish:

Zinc plated

UL Standard: 514B

Fed. Spec. W-F-406E


NEMA: FB-1

^Suitable for use on steel or
aluminum cables

PATENTED
U.S. Patent No.
8.646.813

UL US
E238299
3/8" thru 1"

UL US
E207875
1-1/4" thru 4"

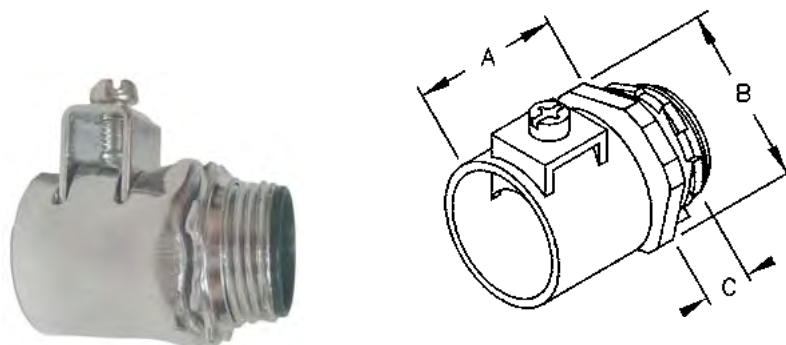

CATALOG NUMBER	CABLE RANGE MAX.	CABLE RANGE MIN.	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
DB38-IC	0.660"	0.400"	3/8"	1/2"	1-3/16"	1-1/4"	1/2"	500	14.8
DB50-IC	0.920"	0.520"	1/2"	1/2"	1-3/8"	1-1/4"	7/16"	100	15.6
DB75-IC	1.110"	0.680"	3/4"	3/4"	1-3/8"	1-7/16"	7/16"	50	17.2
DB100-IC	1.380"	0.880"	1"	1"	1-9/16"	1-13/16"	1/2"	25	31.3
DB125-IC	1.635"	1.150"	1-1/4"	1-1/4"	2-3/16"	2-1/8"	5/8"	10	53.1
DB150-IC	1.950"	1.490"	1-1/2"	1-1/2"	2-7/16"	2-1/2"	5/8"	10	62.5
DB200-IC	2.450"	1.765"	2"	2"	2-9/16"	3"	5/8"	10	87.0
DB250-IC	3.060"	2.270"	2-1/2"	2-1/2"	2-11/16"	3-5/8"	13/16"	5	162.5
DB300-IC	3.560"	3.160"	3"	3"	2-13/16"	4-1/4"	15/16"	5	191.5
DB350-IC	4.060"	3.860"	3-1/2"	3-1/2"	2-15/16"	4-3/4"	1"	1	225.0
DB400-IC	4.560"	4.360"	4"	4"	3"	5-3/16"	1-1/16"	1	263.3

CABLE TYPE	TRADE SIZE 3/8"	TRADE SIZE 1/2"
AC STEEL	1/2, 1/3, 1/4, 1/2, 12/3, 12/4, 10/2 (.450-.660 dia)	12/4, 10/2, 10/3, 10/4, 8/2, 8/3, 8/4, 6/2, 6/3 (.550-.920 dia)
AC STEEL HCF	(.450-.660 dia)	(.550-.920 dia)
AC ALUMINUM	1/2, 1/3, 1/4, 1/2, 12/3, 12/4, 10/2 (.450-.660 dia)	12/4, 10/2, 10/3, 10/4, 8/2, 8/3, 8/4, 6/2, 6/3 (.550-.920 dia)
AC ALUM HCF	(.450-.660 dia)	(.550-.920 dia)
MCI STEEL	1/2, 1/3, 1/4, 1/2, 12/3, 12/4, 10/2 (.450-.660 dia)	10/4, 8/2, 8/3 (.640-.920)
MCI ALUMINUM	1/2, 1/3, 1/4, 1/2, 12/3, 12/4, 10/2 (.450-.660 dia)	10/4, 8/2, 8/3 (.640-.920)
MCI-A	1/2, 1/3, 1/4, 1/2, 12/3, 12/4, 10/2, 10/3 (.400-.590 dia)	12/4, 10/3, 8/4 (.520-.770)
MCI-A HCF	(.400-.590 dia)	(.520-.770)
Flex Conduit	3/8"	1/2"

CABLE TYPE	TRADE SIZE 3/4"	TRADE SIZE 1"
AC STEEL	6/4, 4/2, 4/3 (.930-1.075 dia)	6/4, 4/4, 4/3, 3/3, 3/2, 2/4, 2/3, 1/3 (.930-1.375)
AC STEEL HCF	(.930-1.075 dia)	(.930-1.375 dia)
AC ALUMINUM	8/3, 6/3, 6/4, 4/3 (.680-1.075)	6/4, 4/4, 4/3, 3/3, 3/2, 2/4, 2/3, 1/3 (.930-1.375 dia)
AC ALUM HCF	(.680-1.075 dia)	(.930-1.375)
MCI STEEL	8/3, 8/4, 6/3, 6/4, 4/3 (.730-1.075 dia)	3/4 (.960-1.375)
MCI ALUMINUM	6/4, 4/3 (.930-1.075 dia)	6/4, 4/3, 3/4 (.960-1.375)
MCI-A	8/4, 6/4 (.770-1.110 dia)	(.880-1.110 dia)
MCI-A HCF	(.770-1.110 dia)	(.880-1.110 dia)
Flex Conduit	3/4"	1"

CABLE TYPE	TRADE SIZE 1-1/4"	TRADE SIZE 1-1/2"	TRADE SIZE 2"
AC ALUMINUM	1.150-1.335 dia		
MCI ALUMINUM	1.200-1.635 dia	1.490-1.820	1.765-2.250 dia
Flex Conduit	1-1/4"	1-1/2"	2"

CABLE TYPE	TRADE SIZE 2-1/2"	TRADE SIZE 3"	TRADE SIZE 3-1/2"	TRADE SIZE 4"
AC ALUMINUM				
MCI ALUMINUM	2.270-2.950 dia	3.160-3.480 dia		
Flex Conduit	2-1/2"	3"	3-1/2"	4"

FLEX - AC - MCI

45° Double Bite Saddle Type Connectors with Insulated Throats for Flex • AC • MCI • MCI-A cables, Malleable Iron

Application:

To connect Flex, AC, MCI, MCI-A and HCF cables to outlet boxes.

Features:

- Male Hub Threads - NPSM
- One piece malleable construction affording extra strength
- Dual gripping saddle clamps
- Saddle clamp rides up & down on screw for ease of installation
- Furnished with Insulated Throat
- RoHS compliant

Standard Materials:

Malleable iron
Steel locknuts
Steel clamps

Standard Finish:


Zinc plated

Applicable Third Party

Standards:

UL Standard: 514B
Fed. Spec. W-F-406E
NEMA: FB-1

PATENTED
U.S. Patent No.
7.897.871B1

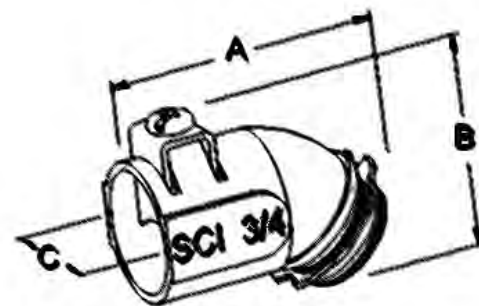

CATALOG NUMBER	CABLE RANGE MAX.	CABLE RANGE MIN.	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
DB3845-IC	0.660"	0.400"	3/8"	1/2"	1-13/16"	1-3/4"	15/16"	50	15.6
DB5045-IC	0.920"	0.520"	1/2"	1/2"	2-1/8"	2-1/8"	1-1/4"	25	25.7
DB7545-IC	1.110"	0.680"	3/4"	3/4"	2-3/8"	2-5/16"	1-7/16"	10	28.8

CABLE TYPE	TRADE SIZE 3/8"	TRADE SIZE 1/2"
AC STEEL	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2 (.450-.660 dia)	12/4, 10/2, 10/3, 10/4, 8/2, 8/3, 8/4, 6/2, 6/3 (.550-.920 dia)
AC STEEL HCF	(.450-.660 dia)	(0.550-0.920 dia)
AC ALUMINUM	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2 (.450-.660 dia)	12/4, 10/2, 10/3, 10/4, 8/2, 8/3, 8/4, 6/2, 6/3 (.550-.920 dia)
AC ALUM HCF	(0.450-0.660 dia)	(0.550-0.920)
MCI STEEL	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3 (.450-.660 dia)	10/4, 8/2, 8/3, 6/3 (.640-.920)
MCI ALUMINUM	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3 (.450-.660 dia)	10/4, 8/2, 8/3, 6/3 (.640-.920)
MCI-A	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3 (.400-.590 dia)	12/4, 10/3, 8/4 (.520-.770)
MCI-A HCF	(.400-.590 dia)	(0.520-0.770)
Flex Conduit	3/8"	1/2"

CABLE TYPE	TRADE SIZE 3/4"
AC STEEL	6/4, 4/2, 4/3 (.930-1.075 dia)
AC STEEL HCF	(.930-1.075 dia)
AC ALUMINUM	8/3, 6/3, 6/4, 4/3 (.680-1.075)
AC ALUM HCF	(.680-1.075 dia))
MCI STEEL	8/3, 6/3, 6/4 (.730-1.075 dia)
MCI ALUMINUM	6/4, 4/3 (.930-1.075 dia)
MCI-A	8/4, 6/4 (.770-1.110 dia)
MCI-A HCF	(.770-1.110 dia)
Flex Conduit	3/4"

FLEX - AC - MCI

90° Double Bite Saddle Type Connectors with Insulated Throats for Flex • AC • MCI • MCI-A cables, Malleable Iron

Application:
To connect Flex, AC, MCI, MCI-A and HCF cables to outlet boxes.

Features:

- Male Hub Threads - NPSM
- One piece malleable construction affording extra strength
- Dual gripping saddle clamps
- Saddle clamp rides up & down on screw for ease of installation
- Furnished with insulated throat
- RoHS compliant

Standard Materials:

Malleable iron
Steel locknuts
Steel clamps

Standard Finish:


Zinc plated

Applicable Third Party

Standards:

UL Standard: 514B
Fed. Spec. W-F-406E
NEMA: FB-1

PATENTED
U.S. Patent No.
7.897.871B1

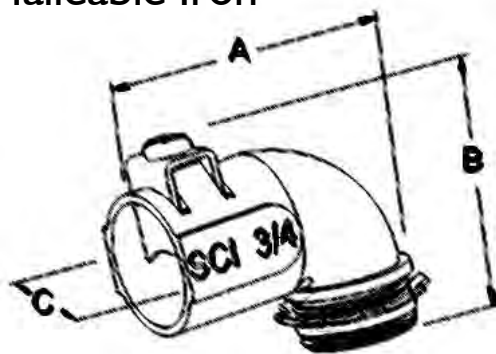

CATALOG NUMBER	CABLE RANGE MAX.	CABLE RANGE MIN.	TRADE SIZE	KO SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
DB3890-IC	0.660"	0.400"	3/8"	1/2"	1-3/4"	2-1/16"	1"	50	18.2
DB5090-IC	0.920"	0.520"	1/2"	1/2"	2-1/8"	2-1/4"	1-1/4"	25	25.0
DB7590-IC	1.110"	0.680"	3/4"	3/4"	2-1/2"	2-1/2"	1-3/8"	20	37.5
DB10090-IC	1.380"	0.880"	1"	1"	2-13/16"	2-7/8"	1-11/16"	5	53.1

CABLE TYPE	TRADE SIZE 3/8"	TRADE SIZE 1/2"
AC STEEL	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2 (.450-.660 dia)	12/4, 10/2, 10/3, 10/4, 8/2, 8/3, 8/4, 6/2, 6/3 (.550-.920 dia)
AC STEEL HCF	(.450-.660 dia)	(.550-.920 dia)
AC ALUMINUM	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2 (.450-.660 dia)	12/4, 10/2, 10/3, 10/4, 8/2, 8/3, 8/4, 6/2, 6/3 (.550-.920 dia)
AC ALUM HCF	(.450-.660 dia)	(.550-.920)
MCI STEEL	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3 (.450-.660 dia)	10/4, 8/2, 8/3, 6/3 (.640-.920)
MCI ALUMINUM	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3 (.450-.660 dia)	10/4, 8/2, 8/3, 6/3 (.640-.920)
MCI-A	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3 (.400-.590 dia)	12/4, 10/3, 8/4 (.520-.770)
MCI-A HCF	(.400-.590 dia)	(.520-0.770)
Flex Conduit	3/8"	1/2"

CABLE TYPE	TRADE SIZE 3/4"	TRADE SIZE 1"
AC STEEL	6/4, 4/2, 4/3 (.930-1.075 dia)	6/4, 4/4, 4/3, 3/3, 3/2, 2/4, 2/3, 1/3, 1/4 (.930-1.375)
AC STEEL HCF	(.930-1.075 dia)	(.930-1.375 dia)
AC ALUMINUM	8/3, 6/3, 6/4, 4/3 (.680-1.075)	6/4, 4/4, 4/3, 3/3, 3/2, 2/4, 2/3, 1/3, 1/4 (.930-1.375 dia)
AC ALUM HCF	(.680-1.075 dia)	(.930-1.375)
MCI STEEL	8/3, 6/3, 6/4 (.730-1.075 dia)	3/4 (.960-1.375)
MCI ALUMINUM	6/4, 4/3 (.930-1.075 dia)	6/4, 4/3, 3/4 (.960-1.375)
MCI-A	8/4, 6/4 (.770-1.110 dia)	(.880-1.110 dia)
MCI-A HCF	(.770-1.110 dia)	(.880-1.110 dia)
Flex Conduit	3/4"	1"

FLEX - AC - MCI TO EMT

Double Bite Saddle Type Compression Couplings Tubular Steel for Flex • AC • MCI Cables to EMT Conduit

Application:
To connect Flex, AC and MCI cables to EMT conduit.

Features:

- One piece tubular construction affording extra strength
- Dual gripping saddle clamps
- Saddle clamp rides up & down on screw for ease of installation
- RoHS compliant

Standard Materials:

Tubular steel
Steel locknut
Steel compression nut
Steel gland ring


Standard Finish:

Zinc plated

Applicable Third Party

Standards:

UL Standard: 514B
Fed. Spec. W-F-406E
NEMA: FB-I

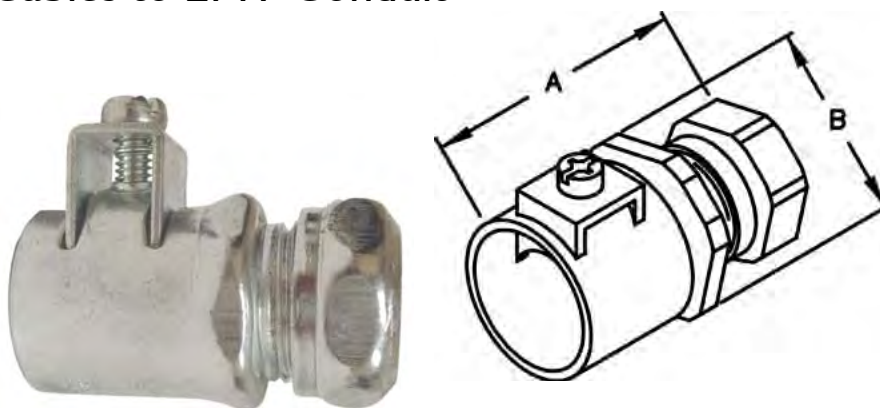

CATALOG NUMBER	CABLE OPENING		TRADE SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
	MAX	MIN					
DBC38	0.660	0.400	3/8"	1-3/8"	1-1/4"	25	17.9
DBC50	0.920	0.520	1/2"	1-9/16"	1-1/4"	10	18.9
DBC75	1.100	0.680	3/4"	1-9/16"	1-7/16"	10	20.3

PATENTED
U.S. Patent No.
7.897.871 B1



1/2" thru 3/4"

FLEX - AC - MCI TO EMT

Double Bite Saddle Type Set Screw Couplings Tubular Steel for Flex

• AC • MCI Cables to EMT Conduit

Application:
To connect Flex, AC and MCI cables to EMT conduit.

Features:

- One piece tubular construction affording extra strength
- Dual gripping saddle clamps
- Saddle clamp rides up & down on screw for ease of installation
- Pre-set & staked tri-head screws
- RoHS compliant

Standard Materials:
Tubular steel


Standard Finish:
Zinc plated

Applicable Third Party Standards:
UL Standard: 514B
Fed. Spec. W-F-408E
NEMA: FB-1

PATENTED
U.S. Patent No.
7.897.871B1



1/2" thru 3/4"

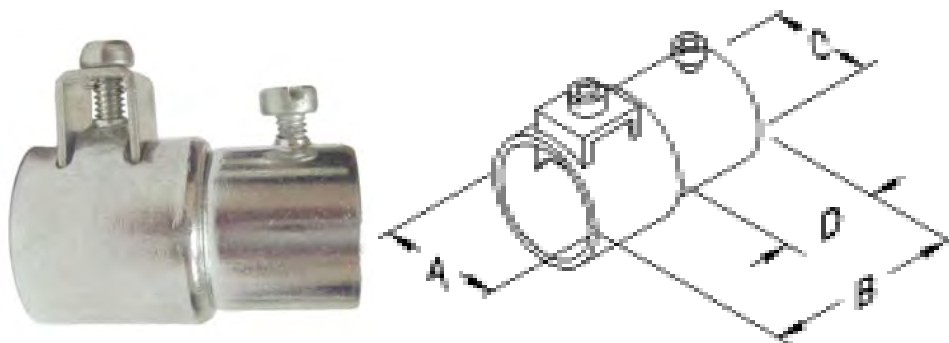

CATALOG NUMBER	CABLE OPENING		TRADE SIZE	DIM A	DIM B	DIM C	DIM D	PCS/UNITS PER BOX	WEIGHT PER C
	MAX	MIN							
DBS38	0.660	0.400	3/8"	3/4"	1-9/16"	7/8"	5/8"	50	17.9
DBS50	0.920	0.520	1/2"	1-1/16"	2"	7/8"	5/8"	25	18.9
DBS75	1.100	0.680	3/4"	1-1/4"	2-1/8"	1-1/8"	13/16"	10	20.3

FLEX - AC - MCI

Steel Space Saver Double Bite Saddle Type Connectors Tubular Steel for Flex • AC • MCI • MCI-A cables

Application:

To afford additional wiring room in junction boxes and eliminate the need for costlier insulated throat fittings and/or conduit bushings. Suitable for use on Steel or Aluminum cables.

Features:

- Eliminates need to purchase insulated throat steel fittings or conduit bushings in 1/2", 3/4" & 1" trade sizes
- Affords additional wiring room in junction boxes (see illustrations above)
- Excellent for low voltage applications
- Heavy steel walls
- For use in dry locations only
- RoHS compliant

Standard Materials:

Steel

Standard Finish:


Zinc plated

Applicable Third Party Standards:


UL Standard: 514B
Fed. Spec. W-F-408E
NEMA: FB-1

**Winner of the 2005
EC&M Product of
the Year
Competition!**


**PATENTED
U.S. Patent No.
7.897.871B1**



CATALOG NUMBER	TRADE SIZE	KO SIZE	CABLE RANGE		DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
			MAX.	MIN.				
SSC50-DB38	3/8"	1/2"	0.660"	0.400"	1-3/8"	3/4"	456	9.4
SSC50-DB50	1/2"	1/2"	0.920"	0.520"	1-3/8"	1-1/16"	315	11.8
SSC75-DB75	3/4"	3/4"	1.110"	0.680"	1-1/2"	1-1/4"	252	14.4
SSC100-DB100	1"	1"	1.375"	0.930"	2"	1-9/16"	100	30.3



Using Space Savers Double Bite in a 4 inch square box affords an additional 3-3/4 square inches of wiring room, and does not require the use of an insulated throat fitting.



CABLE TYPE	TRADE SIZE 3/8"	TRADE SIZE 1/2"
AC STEEL	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2 (.450 - .660 dia)	12/4, 10/2, 10/3, 10/4, 8/2, 8/3, 8/4, 6/2, 6/3 (.550 - .920 dia)
AC STEEL HCF	(.450 - .660 dia)	(.550 - .920 dia)
AC ALUMINUM	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2 (.450 - .660 dia)	12/4, 10/2, 10/3, 10/4, 8/2, 8/3, 8/4, 6/2, 6/3 (.550 - .920 dia)
AC ALUM HCF	(.450 - .660 dia)	(.550 - .920 dia)
MCI STEEL	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2 (.450 - .660 dia)	10/4, 8/2, 8/3 (.640 - .920 dia)
MCI ALUMINUM	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2 (.450 - .660 dia)	10/4, 8/2, 8/3 (.640 - .920 dia)
MCI-A	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3 (.500 - .590 dia)	12/4, 10/3, 8/4 (.520 - .770 dia)
MCI-A HCF	(.400 - .590 dia)	(0.520 - .770 dia)
Flex Conduit	3/8"	1/2"

CABLE TYPE	TRADE SIZE 3/4"	TRADE SIZE 1"
AC STEEL	6/4, 4/2, 4/3, (.930 - 1.075 dia)	6/4, 4/4, 4/3, 3/3, 3/2, 2/3, 1/3 (.930 - 1.375 dia)
AC STEEL HCF	(.930 - 1.075 dia)	(.930 - 1.375 dia)
AC ALUMINUM	8/3, 6/3, 6/4, 4/3 (.680 - 1.075 dia)	6/4, 4/4, 4/3, 3/3, 3/2, 2/4, 2/3, 1/3 (.930 - 1.375 dia)
AC ALUM HCF	(.680 - 1.075 dia)	(.930 - 1.375 dia)
MCI STEEL	8/3, 8/4, 6/3, 6/4, 4/3 (.730 - 1.075 dia)	3/4 (.960 - 1.375 dia)
MCI ALUMINUM	6/4, 4/3 (.930 - 1.075 dia)	6/4, 4/3, 3/4 (.960 - 1.375 dia)
MCI-A	8/4, 6/4 (.770 - 1.110 dia)	6/4 (1.110 dia)
MCI-A HCF	(.770 - 1.110 dia)	(1.110 dia)
Flex Conduit	3/4"	1"



CORD GRIP FITTINGS:

Color-Coded Cord Grip Connectors Straight
Color-Coded Cord Grip Connectors 45 degree
Color-Coded Cord Grip Connectors 90 degree

CORD GRIP STRAIN RELIEF CONNECTORS

Color-Coded Cord Grip Connectors

Application:

To secure and seal cords or cables entering enclosures or raceways.

Features:

- Neoprene grommet for a moisture proof seal
- Simple installation, cord can be installed without disassembly of the fitting
- Liquidtight/Oiltight/Raintight
- Suitable for NEMA 4 enclosures and other wet locations
- Male tapered thread NPT
- Colored grommet allows for easy identification
- RoHS compliant

Standard Materials:

Steel body
Steel gland nut
Neoprene grommet

Standard Finish:

Zinc plated body, gland nut


Applicable Third Party

Standards:

UL Standard: 514B
Fed. Spec. W-F-406E

Suitable for use in Class I, Div.

2 hazardous locations when installed in accordance with NEC 501.10(B)(2).

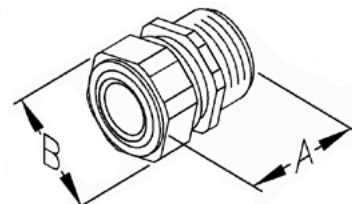

CATALOG NUMBER	TRADE SIZE	COLOR CODE	CABLE RANGE		DIM A	DIM B	PCS/UNIT PER BOX	WEIGHT PER C
			Min.	Max.				
CG50-250	1/2"	Red	0.15	0.25	1-7/16"	1-1/8"	200	12.3
CG50-350	1/2"	White	0.25	0.35	1-7/16"	1-1/8"	200	12.0
CG50-450	1/2"	Blue	0.35	0.45	1-7/16"	1-1/8"	200	11.9
CG50-560	1/2"	Green	0.45	0.56	1-7/16"	1-1/8"	200	11.8
CG50-650	1/2"	Brown	0.55	0.65	1-7/16"	1-1/8"	200	11.3
CG75-250	3/4"	Red	0.15	0.25	1-1/2"	1-1/4"	150	18.0
CG75-350	3/4"	White	0.25	0.35	1-1/2"	1-1/4"	150	18.0
CG75-450	3/4"	Blue	0.35	0.45	1-1/2"	1-1/4"	150	17.8
CG75-560	3/4"	Green	0.45	0.56	1-1/2"	1-1/4"	150	17.4
CG75-650	3/4"	Brown	0.55	0.65	1-1/2"	1-1/4"	150	17.0
CG75-750	3/4"	Yellow	0.65	0.75	1-11/16"	1-5/16"	150	18.3
CG75-850	3/4"	Purple	0.75	0.85	1-11/16"	1-5/16"	150	18.1
CG100-560	1"	Green	0.45	0.56	1-3/4"	1-1/2"	100	28.1
CG100-650	1"	Brown	0.55	0.65	1-3/4"	1-1/2"	100	28.3
CG100-750	1"	Yellow	0.65	0.75	1-3/4"	1-1/2"	100	27.4
CG100-850	1"	Purple	0.75	0.85	1-3/4"	1-1/2"	100	27.5
CG100-950	1"	Gray	0.85	0.95	1-15/16"	1-5/8"	100	28.9
CG100-1050	1"	Black	0.95	1.05	1-15/16"	1-5/8"	100	28.6
CG125-850	1-1/4"	Purple	0.75	0.85	1-15/16"	1-7/8"	50	45.2
CG125-950	1-1/4"	Gray	0.85	0.95	1-15/16"	1-7/8"	50	44.9
CG125-1050	1-1/4"	Black	0.95	1.05	2-1/16"	2"	50	45.0
CG125-1150	1-1/4"	Orange	1.05	1.15	2-1/16"	2"	50	46.8
CG125-1250	1-1/4"	Red	1.15	1.25	2-1/16"	2"	50	45.3
CG125-1375	1-1/4"	White	1.25	1.375	2-1/16"	2"	50	44.5
CG150-1050	1-1/2"	Black	0.95	1.05	2-1/8"	2-1/4"	25	70.5
CG150-1150	1-1/2"	Orange	1.05	1.15	2-1/8"	2-1/4"	25	69.8
CG150-1250	1-1/2"	Red	1.15	1.25	2-1/8"	2-1/4"	25	69.6
CG150-1375	1-1/2"	White	1.25	1.375	2-1/8"	2-1/4"	25	68.4

The number of pieces per box has been changed from previous catalog quantities.

This chart is intended for use as a guide only. Whenever possible, exact cord dimensions should be used. Steel Components Inc. assumes no liability for errors, omissions or dimensional changes which may result from changes in design, material or the manufacturing process and which may affect cord and fitting compatibility.

CORD GRIP STRAIN RELIEF CONNECTORS

Color-Coded 45° Cord Grip Connectors

Application:
To secure and seal cords or cables entering enclosures or raceways.

Features:


- Neoprene grommet for a moisture proof seal
- Simple installation, cord can be installed without disassembly of the fitting
- Liquidtight/Oiltight/Raintight
- Suitable for NEMA 4 enclosures and other wet locations
- Male tapered thread NPT
- Colored grommet allows for easy identification
- RoHS compliant

Standard Materials:
Malleable iron body & gland nut
Neoprene grommet

Standard Finish:
Zinc plated body, gland nut

Applicable Third Party Standards:
UL Standard: 514B
Fed. Spec. W-F-406E

Suitable for use in Class I, Div. 2 hazardous locations when installed in accordance with NEC 501.10(B)(2).



CATALOG NUMBER	TRADE SIZE	COLOR CODE	CABLE RANGE		DIM A	DIM B	PCS/UNIT PER BOX	WEIGHT PER C
			Min.	Max.				
CG50-25045	1/2"	Red	0.15	0.25	2-9/16"	1-1/4"	50	27.1
CG50-35045	1/2"	White	0.25	0.35	2-9/16"	1-1/4"	50	26.9
CG50-45045	1/2"	Blue	0.35	0.45	2-9/16"	1-1/4"	50	27.0
CG50-56045	1/2"	Green	0.45	0.56	2-9/16"	1-1/4"	50	26.3
CG50-65045	1/2"	Brown	0.55	0.65	2-9/16"	1-1/4"	50	26.2
CG75-25045	3/4"	Red	0.15	0.25	2-7/8"	1-7/16"	50	42.0
CG75-35045	3/4"	White	0.25	0.35	2-7/8"	1-7/16"	50	42.5
CG75-45045	3/4"	Blue	0.35	0.45	2-7/8"	1-7/16"	50	41.8
CG75-56045	3/4"	Green	0.45	0.56	2-7/8"	1-7/16"	50	41.8
CG75-65045	3/4"	Brown	0.55	0.65	2-7/8"	1-7/16"	50	41.2
CG75-75045	3/4"	Yellow	0.65	0.75	2-7/8"	1-7/16"	50	37.6
CG75-85045	3/4"	Purple	0.75	0.85	2-7/8"	1-7/16"	50	37.2
CG100-56045	1"	Green	0.45	0.56	3-1/8"	1-3/4"	25	55.1
CG100-65045	1"	Brown	0.55	0.65	3-1/8"	1-3/4"	25	55.6
CG100-75045	1"	Yellow	0.65	0.75	3-1/8"	1-3/4"	25	54.4
CG100-85045	1"	Purple	0.75	0.85	3-1/8"	1-3/4"	25	53.8
CG100-95045	1"	Gray	0.85	0.95	3-15/16"	1-3/4"	25	63.1
CG100-105045	1"	Black	0.95	1.05	3-15/16"	1-3/4"	25	62.1
CG125-85045	1-1/4"	Purple	0.75	0.85	3-5/16"	2"	25	77.9
CG125-95045	1-1/4"	Gray	0.85	0.95	3-5/16"	2-1/16"	25	77.8
CG125-105045	1-1/4"	Black	0.95	1.05	3-9/16"	2-1/16"	25	78.8
CG125-115045	1-1/4"	Orange	1.05	1.15	3-9/16"	2-1/16"	25	77.9
CG125-125045	1-1/4"	Red	1.15	1.25	3-9/16"	2-1/16"	25	75.7
CG125-137545	1-1/4"	White	1.25	1.375	3-9/16"	2-1/16"	25	75.9
CG150-105045	1-1/2"	Black	0.95	1.05	3-5/8"	2-1/4"	25	96.6
CG150-115045	1-1/2"	Orange	1.05	1.15	3-5/8"	2-1/4"	25	95.6
CG150-125045	1-1/2"	Red	1.15	1.25	3-5/8"	2-1/4"	25	95.3
CG150-137545	1-1/2"	White	1.25	1.375	3-5/8"	2-1/4"	25	94.8

The number of pieces per box has been changed from previous catalog quantities.

This chart is intended for use as a guide only. Whenever possible, exact cord dimensions should be used. Steel Components Inc. assumes no liability for errors, omissions or dimensional changes which may result from changes in design, material or the manufacturing process and which may affect cord and fitting compatibility.

CORD GRIP STRAIN RELIEF CONNECTORS

Color-Coded 90° Cord Grip Connectors

Application:

To secure and seal cords or cables entering enclosures or raceways.

Features:

- Neoprene grommet for a moisture proof seal
- Simple installation, cord can be installed without disassembly of the fitting
- Liquidtight/Oiltight/Raintight
- Suitable for NEMA 4 enclosures and other wet locations
- Male tapered thread NPT
- Colored grommet allows for easy identification
- RoHS compliant

Standard Materials:

Malleable iron body & gland nut
Neoprene grommet

Standard Finish:

Zinc plated body, gland nut


Applicable Third Party

Standards:

UL Standard: 514B

Fed. Spec. W-F-406E

Suitable for use in Class I, Div. 2 hazardous locations when installed in accordance with NEC 501.10(B)(2).



CATALOG NUMBER	TRADE SIZE	COLOR CODE	CABLE RANGE		DIM A	DIM B	PCS/UNIT PER BOX	WEIGHT PER C
Min.	Max.							
CG50-25090	1/2"	Red	0.15	0.25	2-3/4"	1-1/4"	50	29.2
CG50-35090	1/2"	White	0.25	0.35	2-3/4"	1-1/4"	50	29.6
CG50-45090	1/2"	Blue	0.35	0.45	2-3/4"	1-1/4"	50	29.0
CG50-56090	1/2"	Green	0.45	0.56	2-3/4"	1-1/4"	50	29.0
CG50-65090	1/2"	Brown	0.55	0.65	2-3/4"	1-1/4"	50	28.5
CG75-25090	3/4"	Red	0.15	0.25	3-1/4"	1-7/16"	50	46.4
CG75-35090	3/4"	White	0.25	0.35	3-1/4"	1-7/16"	50	48.3
CG75-45090	3/4"	Blue	0.35	0.45	3-1/4"	1-7/16"	50	45.4
CG75-56090	3/4"	Green	0.45	0.56	3-1/4"	1-7/16"	50	45.3
CG75-65090	3/4"	Brown	0.55	0.65	3-1/4"	1-7/16"	50	45.7
CG75-75090	3/4"	Yellow	0.65	0.75	3-1/4"	1-7/16"	50	45.7
CG75-85090	3/4"	Purple	0.75	0.85	3-1/4"	1-7/16"	50	42.7
CG100-56090	1"	Green	0.45	0.56	3-3/4"	1-3/4"	25	66.1
CG100-65090	1"	Brown	0.55	0.65	3-3/4"	1-3/4"	25	67.8
CG100-75090	1"	Yellow	0.65	0.75	3-3/4"	1-3/4"	25	65.7
CG100-85090	1"	Purple	0.75	0.85	3-3/4"	1-3/4"	25	63.7
CG100-95090	1"	Gray	0.85	0.95	3-7/8"	1-3/4"	25	71.3
CG100-105090	1"	Black	0.95	1.05	3-7/8"	1-3/4"	25	70.9
CG125-85090	1-1/4"	Purple	0.75	0.85	4-3/16"	2"	25	87.4
CG125-95090	1-1/4"	Gray	0.85	0.95	4-3/16"	2"	25	86.9
CG125-105090	1-1/4"	Black	0.95	1.05	4-3/8"	2-1/16"	25	85.6
CG125-115090	1-1/4"	Orange	1.05	1.15	4-3/8"	2-1/16"	25	87.2
CG125-125090	1-1/4"	Red	1.15	1.25	4-3/8"	2-1/16"	25	86.4
CG125-137590	1-1/4"	White	1.25	1.375	4-3/8"	2-1/16"	25	79.8
CG150-105090	1-1/2"	Black	0.95	1.05	4-5/8"	2-1/4"	25	114.4
CG150-115090	1-1/2"	Orange	1.05	1.15	4-5/8"	2-1/4"	25	113.8
CG150-125090	1-1/2"	Red	1.15	1.25	4-5/8"	2-1/4"	25	113.4
CG150-137590	1-1/2"	White	1.25	1.375	4-5/8"	2-1/4"	25	112.4

The number of pieces per box has been changed from previous catalog quantities.

This chart is intended for use as a guide only. Whenever possible, exact cord dimensions should be used. Steel Components Inc. assumes no liability for errors, omissions or dimensional changes which may result from changes in design, material or the manufacturing process and which may affect cord and fitting compatibility.

NONMETALLIC CABLE CONNECTORS

Cord Connectors For Non-Metallic Sheathed Cable and Cord

Features:

- Steel Bolt - Case Hardened
- RoHS compliant

Standard Materials:

Steel

Standard Finish:


Zinc Plated

Applicable Third Party Standards:

UL Standard: 514B

Fed. Spec. W-F-408E

NEMA: FB-1

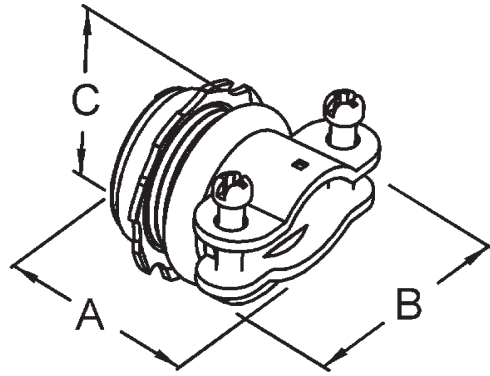

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
S631	3/4"	1-3/8"	1-5/8"	1-5/16"	20	12.5
S632	1"	1-3/4"	1-7/8"	1-5/16"	10	16.9

CABLE TYPE	S631	S632
NM SHEATHED	8/3, 8/2, 6/3, 6/2	8/3, 6/3
FLEX CORD	.620" Dia. - .750" Dia.	.620" Dia. - .750" Dia.
SE CABLE	8/2, 6/3	6/3
SERVICE ENTRANCE	8/2, 6/3	6/3





CONDUIT BODIES:

Aluminum Die Cast Threaded Conduit Bodies
Aluminum Die Cast Set Screw Conduit Bodies
Aluminum Die Cast Combination Conduit Bodies
Aluminum Die Cast Conduit Bodies
Stamped Aluminum Conduit Body Covers
Neoprene Rubber Conduit Body Gasket
Watertight Rigid Conduit Bodies
Rigid Conduit Bodies
Raised Dome Stamped Steel Conduit Body Covers
Malleable Iron Conduit Body Covers

CONDUIT BODIES

Watertight Rigid Conduit Bodies with Stamped Steel Cover & Neoprene Gasket, Malleable Iron • for Rigid • IMC conduit

Application:
To provide access to conductors for pulling, splicing and maintenance.

Features:

- Tapered threaded hubs - NPT
- Suitable for use in concrete
- NEMA 4 Watertight

Standard Materials:

Malleable iron
Covers - Stamped steel
Gasket - Neoprene rubber

Standard Finish:

Zinc plated with
Aluminum enamel paint

Applicable Third Party Standards:

UL Standard: 514A
Fed. Spec. W-C-586D
NEMA: FB-1
NEMA 4

The only Malleable Iron Conduit Bodies Watertight Rated Type NEMA 4.


Protected from dirt, rain, sleet, snow, windblown dust, splashing water, hose-directed water and ice build up.

Winner of the 2007 EC&M Product of the Year Competition in the Conduit & Cable Fitting Category!

PATENTED


U.S. Patent No.

8,129,631 B1



Threaded LB Conduit Bodies

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	WEIGHT PER C
MLB1CG	1/2"	4-11/16"	1-3/8"	2-7/16"	81.8
MLB2CG	3/4"	5-3/8"	1-5/8"	2-11/16"	111.7
MLB3CG	1"	6-3/16"	1-7/8"	3-1/16"	164.4
MLB4CG	1-1/4"	8-1/8"	2-5/8"	3-1/4"	323.6
MLB5CG	1-1/2"	8-1/8"	2-5/8"	3-5/16"	367.8
MLB6CG	2"	10-1/2"	3-1/4"	5-1/16"	590.4
MLB7CG	2-1/2"	13-5/8"	4-7/16"	6-1/4"	1205.7
MLB8CG	3"	13-7/8"	4-7/16"	6-3/4"	1261.0
MLB9CG	3-1/2"	16-1/4"	5-11/16"	7-3/4"	2139.5
MLB10CG	4"	16-5/8"	5-11/16"	8-1/16"	2250.0



Threaded C Conduit Bodies

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	WEIGHT PER C
MC1CG	1/2"	5-3/8"	1-3/8"	1-3/4"	109.5
MC2CG	3/4"	6"	1-5/8"	2-1/8"	133.4
MC3CG	1"	7-1/16"	1-7/8"	2-5/16"	191.4
MC4CG	1-1/4"	9"	2-5/8"	3-1/4"	345.7
MC5CG	1-1/2"	9"	2-5/8"	3-5/16"	404.6
MC6CG	2"	11-1/2"	3-1/4"	3-15/16"	608.8
MC7CG	2-1/2"	15"	4-7/16"	4-3/4"	1316.2
MC8CG	3"	15-1/8"	4-7/16"	5-5/8"	1537.2
MC9CG	3-1/2"	18-1/8"	5-11/16"	6-1/2"	2360.5
MC10CG	4"	18-1/8"	5-11/16"	6-1/2"	2471.0

CONDUIT BODIES

Watertight Rigid Conduit Bodies with Stamped Steel Cover & Neoprene Gasket, Malleable Iron • for Rigid • IMC conduit

Application:

To provide access to conductors for pulling, splicing and maintenance.

Features:

- Tapered threaded hubs - NPT
- Suitable for use in concrete
- NEMA 4 Watertight

Standard Materials:

Malleable iron
Covers - Stamped steel
Gasket - Neoprene rubber

Standard Finish:

Zinc plated with
Aluminum enamel paint

Applicable Third Party


Standards:
UL Standard: 514A
Fed. Spec. W-C-586D
NEMA: FB-1
NEMA 4

**The only Malleable
Iron Conduit Bodies
Watertight Rated Type
NEMA 4.**

**Protected from dirt,
rain, sleet, snow,
windblown dust,
splashing water, hose-
directed water and ice
build up.**


**Winner of the 2007
EC&M Product of
the Year
Competition in the
Conduit & Cable
Fitting Category!**

**PATENTED
U.S. Patent No.
8,129,631 B1**



Threaded LL Conduit Bodies

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	WEIGHT PER C
MLL1CG	1/2"	4-11/16"	2-1/16"	1-3/4"	87.6
MLL2CG	3/4"	5-3/8"	2-1/4"	2-1/8"	109.7
MLL3CG	1"	6-3/16"	2-5/8"	2-5/16"	159.8
MLL4CG	1-1/4"	8-1/8"	2-3/4"	3-1/4"	345.7
MLL5CG	1-1/2"	8-1/8"	3-1/2"	3-5/16"	367.8
MLL6CG	2"	10-1/2"	4-1/8"	3-15/16"	553.6
MLL7CG	2-1/2"	13-5/8"	4-11/16"	4-3/4"	1205.7
MLL8CG	3"	13-7/8"	5-7/8"	5-5/8"	1537.2
MLL9CG	3-1/2"	16-1/4"	6-1/8"	6-1/2"	2471.0
MLL10CG	4"	16-1/4"	6-15/16"	6-1/2"	2581.5



Threaded LR Conduit Bodies

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	WEIGHT PER C
MLR1CG	1/2"	4-11/16"	2-1/16"	1-3/4"	82.3
MLR2CG	3/4"	5-3/8"	2-1/4"	2-1/8"	115.0
MLR3CG	1"	6-3/16"	2-5/8"	2-5/16"	178.2
MLR4CG	1-1/4"	8-1/8"	2-3/4"	3-1/4"	367.8
MLR5CG	1-1/2"	8-1/8"	2-13/16"	3-5/16"	381.6
MLR6CG	2"	10-1/2"	4-7/16"	3-15/16"	682.5
MLR7CG	2-1/2"	13-5/8"	5-3/8"	4-3/4"	1205.7
MLR8CG	3"	13-7/8"	5-7/8"	5-5/8"	1537.2
MLR9CG	3-1/2"	16-1/4"	6-7/8"	6-1/2"	2471.0
MLR10CG	4"	16-5/8"	7-3/16"	6-1/2"	2650.5

CONDUIT BODIES

Watertight Rigid Conduit Bodies with Stamped Steel Cover & Neoprene Gasket, Malleable Iron • for Rigid • IMC conduit

Application:

To provide access to conductors for pulling, splicing and maintenance.

Features:

- Tapered threaded hubs - NPT
- Suitable for use in concrete
- NEMA 4 Watertight

Standard Materials:

Malleable iron
Covers - Stamped steel
Gasket - Neoprene rubber

Standard Finish:

Zinc plated with
Aluminum enamel paint

Applicable Third Party


Standards:
UL Standard: 514A
Fed. Spec. W-C-586D
NEMA: FB-1
NEMA 4

**The only Malleable
Iron Conduit Bodies
Watertight Rated Type
NEMA 4.**

**Protected from dirt,
rain, sleet, snow,
windblown dust,
splashing water, hose-
directed water and ice
build up.**


**Winner of the 2007
EC&M Product of
the Year
Competition in the
Conduit & Cable
Fitting Category!**

**PATENTED
U.S. Patent No.
8,129,631**



Threaded T Conduit Bodies

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	WEIGHT PER C
MT1CG	1/2"	5-3/8"	2-1/16"	1-11/16"	121.8
MT2CG	3/4"	6"	2-1/4"	1-15/16"	152.0
MT3CG	1"	7-1/16"	2-5/8"	2-1/4"	218.1
MT4CG	1-1/4"	9"	2-3/4"	3-1/8"	367.8
MT5CG	1-1/2"	9"	3-1/2"	3-1/8"	404.6
MT6CG	2"	11-1/2"	4-1/8"	3-3/4"	719.3
MT7CG	2-1/2"	15"	5-11/16"	5-3/16"	1371.5
MT8CG	3"	15-1/8"	5-7/8"	5-3/16"	1647.7
MT9CG	3-1/2"	18-1/8"	6-13/16"	5-3/4"	2692.0
MT10CG	4"	18-1/8"	7-3/16"	5-3/4"	2692.0



Threaded TB Conduit Bodies

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	WEIGHT PER C
MTB1CG	1/2"	5-1/4"	1-3/8"	1-11/16"	99.7
MTB2CG	3/4"	6-1/16"	1-5/8"	2"	134.7
MTB3CG	1"	7-1/8"	1-7/8"	2-1/4"	219.0
MTB4CG	1-1/4"	9-5/16"	2-5/8"	4-1/4"	378.9
MTB5CG	1-1/2"	9-5/16"	2-5/8"	4-1/4"	456.2
MTB6CG	2"	11-13/16"	3-1/4"	4-3/4"	746.9

CONDUIT BODIES

Watertight Rigid Conduit Bodies with Stamped Steel Cover & Neoprene Gasket, Malleable Iron • for Rigid • IMC conduit

Application:

To provide access to conductors for pulling, splicing and maintenance.

Features:

Conduit Body

- Tapered threaded hubs - NPT
- Suitable for use in concrete
- NEMA 4 Watertight

Watertight Cover

- Raised dome
- Captive screws

Standard Materials:

Malleable iron
Stamped steel cover
Gasket - Neoprene rubber
Stainless steel screws
Nylon washers

Standard Finish:

Zinc plated with
Aluminum enamel paint

Applicable Third Party

Standards:

UL Standard: 514A
Fed. Spec. W-C-586D
NEMA: FB-1
NEMA 4

**The only Malleable Iron
Conduit Bodies
Watertight Rated Type
NEMA 4.**

**Protected from dirt,
rain, sleet, snow,
windblown dust,
splashing water, hose-
directed water and ice
build up.**


**Winner of the 2007
EC&M Product of
the Year**

**Competition in the
Conduit & Cable Fit-
ting Category!**

PATENTED


U.S. Patent No.

8,129,631



Threaded X Conduit Bodies

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	WEIGHT PER C
MX1CG	1/2"	5-7/16"	2-13/16"	2-1/8"	150.1
MX2CG	3/4"	6-1/16"	2-15/16"	2-7/16"	187.1
MX3CG	1"	7-1/8"	3-9/16"	2-11/16"	268.5
MX4CG	1-1/4"	9-1/8"	4-7/16"	3-1/16"	452.7
MX5CG	1-1/2"	9-1/8"	4-7/16"	3-1/4"	498.9
MX6CG	2"	11-3/4"	5-3/8"	4-1/16"	889.0



Raised Dome Stamped Steel Conduit Body Cover & Neoprene Gasket
For Rigid • IMC conduit

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	WEIGHT PER C
SCG1	1/2"	3-15/16"	1-3/8"	3/8"	11.3
SCG2	3/4"	4-11/16"	1-5/8"	7/16"	15.0
SCG3	1"	5-3/8"	1-7/8"	7/16"	21.7
SCG4	1-1/4" - 1-1/2"	7-1/4"	2-5/8"	1/2"	36.3
SCG5	2"	9-9/16"	3-1/4"	5/8"	56.3
SCG6	2-1/2" - 3"	12-5/16"	4-7/16"	7/8"	100.7
SCG7	3-1/2" - 4"	14-7/8"	5-11/16"	7/8"	150.5

CONDUIT BODIES

Raintight Rigid Conduit Bodies with Stamped Steel Cover & Neoprene Gasket, Malleable Iron • for Rigid • IMC conduit

Application:
To provide access to conductors for pulling, splicing and maintenance.

Features:

- Tapered threaded hubs - NPT
- Suitable for use in concrete
- Wet location

Standard Materials:


Malleable iron
Covers - Stamped steel
Gasket - Neoprene rubber

Standard Finish:

Zinc plated with
Aluminum enamel paint

Applicable Third Party

Standards:
UL Standard: 514A, 514B
Fed. Spec. W-C-586D
NEMA: FB-1

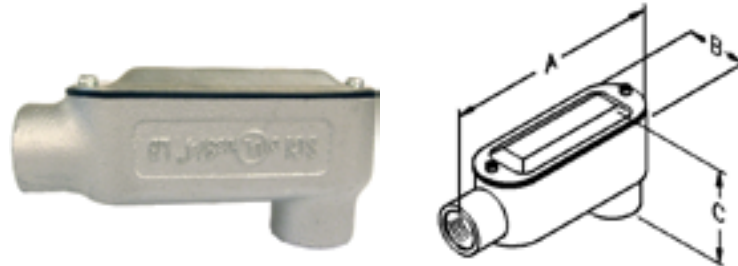

Threaded LB Conduit Bodies

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	WEIGHT PER C
MLB1CNG	1/2"	4-11/16"	1-3/8"	2-7/16"	82.5
MLB2CNG	3/4"	5-3/8"	1-5/8"	2-11/16"	112.3
MLB3CNG	1"	6-3/16"	1-7/8"	3-1/16"	167.7
MLB4CNG	1-1/4"	8-1/8"	2-5/8"	3-1/4"	324.8
MLB5CNG	1-1/2"	8-1/8"	2-5/8"	3-5/16"	369.0
MLB6CNG	2"	10-1/2"	3-1/4"	5-1/16"	595.0
MLB7CNG	2-1/2"	13-5/8"	4-7/16"	6-1/4"	1211.3
MLB8CNG	3"	13-7/8"	4-7/16"	6-3/4"	1266.6
MLB9CNG	3-1/2"	16-1/4"	5-11/16"	7-3/4"	2156.2
MLB10CNG	4"	16-5/8"	5-11/16"	8-1/16"	2266.7



Threaded C Conduit Bodies

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	WEIGHT PER C
MC1CNG	1/2"	5-3/8"	1-3/8"	1-3/4"	110.1
MC2CNG	3/4"	6"	1-5/8"	2-1/8"	134.0
MC3CNG	1"	7-1/16"	1-7/8"	2-5/16"	191.7
MC4CNG	1-1/4"	9"	2-5/8"	3-1/4"	346.9
MC5CNG	1-1/2"	9"	2-5/8"	3-5/16"	405.8
MC6CNG	2"	11-1/2"	3-1/4"	3-15/16"	613.4
MC7CNG	2-1/2"	15"	4-7/16"	4-3/4"	1321.8
MC8CNG	3"	15-1/8"	4-7/16"	5-5/8"	1542.8
MC9CNG	3-1/2"	18-1/8"	5-11/16"	6-1/2"	2377.2
MC10CNG	4"	18-1/8"	5-11/16"	6-1/2"	2487.7



CONDUIT BODIES

Raintight Rigid Conduit Bodies with Stamped Steel Cover & Neoprene Gasket, Malleable Iron • for Rigid • IMC conduit

Application:

To provide access to conductors for pulling, splicing and maintenance.

Features:

- Tapered threaded hubs - NPT
- Suitable for use in concrete
- Wet location

Standard Materials:


Malleable iron
Covers - Stamped steel
Gasket - Neoprene rubber

Standard Finish:

Zinc plated with
Aluminum enamel paint


Applicable Third Party

Standards:
UL Standard: 514A, 514B
Fed. Spec. W-C-586D
NEMA: FB-1



Threaded LL Conduit Bodies

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	WEIGHT PER C
MLL1CNG	1/2"	4-11/16"	2-1/16"	1-3/4"	87.9
MLL2CNG	3/4"	5-3/8"	2-1/4"	2-1/8"	110.3
MLL3CNG	1"	6-3/16"	2-5/8"	2-5/16"	160.1
MLL4CNG	1-1/4"	8-1/8"	2-3/4"	3-1/4"	346.9
MLL5CNG	1-1/2"	8-1/8"	3-1/2"	3-5/16"	369.0
MLL6CNG	2"	10-1/2"	4-1/8"	3-13/16"	558.2
MLL7CNG	2-1/2"	13-5/8"	4-11/16"	4-3/4"	1211.3
MLL8CNG	3"	13-7/8"	5-7/8"	5-5/8"	1542.8
MLL9CNG	3-1/2"	16-1/4"	6-1/8"	6-1/2"	2444.0
MLL10CNG	4"	16-1/4"	6-15/16"	6-1/2"	2598.2



Threaded LR Conduit Bodies

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	WEIGHT PER C
MLR1CNG	1/2"	4-11/16"	2-1/16"	1-3/4"	82.9
MLR2CNG	3/4"	5-3/8"	2-1/4"	2-1/8"	115.6
MLR3CNG	1"	6-3/16"	2-5/8"	2-5/16"	178.5
MLR4CNG	1-1/4"	8-1/8"	2-3/4"	3-1/4"	368.0
MLR5CNG	1-1/2"	8-1/8"	2-13/16"	3-5/16"	382.8
MLR6CNG	2"	10-1/2"	4-7/16"	3-13/16"	687.1
MLR7CNG	2-1/2"	13-5/8"	5-3/8"	4-3/4"	1211.3
MLR8CNG	3"	13-7/8"	5-7/8"	5-5/8"	1542.8
MLR9CNG	3-1/2"	16-1/4"	6-7/8"	6-1/2"	2487.7
MLR10CNG	4"	16-5/8"	7-3/16"	6-1/2"	2667.2



CONDUIT BODIES

Raintight Rigid Conduit Bodies with Stamped Steel Cover & Neoprene Gasket, Malleable Iron • for Rigid • IMC conduit

Application:

To provide access to conductors for pulling, splicing and maintenance.

Features:

- Tapered threaded hubs - NPT
- Suitable for use in concrete
- Wet location

Standard Materials:


Malleable iron
Covers - Stamped steel
Gasket - Neoprene rubber

Standard Finish:

Zinc plated with
Aluminum enamel paint


Applicable Third Party

Standards:
UL Standard: 514A, 514B
Fed. Spec. W-C-586D
NEMA: FB-1



Threaded T Conduit Bodies

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	WEIGHT PER C
MT1CNG	1/2"	5-3/8"	2-1/16"	1-11/16"	122.4
MT2CNG	3/4"	6"	2-1/4"	1-15/16"	152.6
MT3CNG	1"	7-1/16"	2-5/8"	2-1/4"	218.4
MT4CNG	1-1/4"	9"	2-3/4"	3-1/8"	369.0
MT5CNG	1-1/2"	9"	3-1/2"	3-1/8"	405.8
MT6CNG	2"	11-1/2"	4-1/8"	3-3/4"	723.9
MT7CNG	2-1/2"	15"	5-11/16"	5-3/16"	1377.1
MT8CNG	3"	15-1/8"	5-7/8"	5-3/16"	1609.5
MT9CNG	3-1/2"	18-1/8"	6-13/16"	5-3/4"	2708.7
MT10CNG	4"	18-1/8"	7-3/16"	5-3/4"	2708.7



Threaded TB Conduit Bodies

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	WEIGHT PER C
MTB1CNG	1/2"	5-1/4"	1-3/8"	1-11/16"	100.3
MTB2CNG	3/4"	6-1/16"	1-5/8"	2"	135.3
MTB3CNG	1"	7-1/8"	1-7/8"	2-1/4"	219.3
MTB4CNG	1-1/4"	9-5/16"	2-5/8"	4-1/4"	380.1
MTB5CNG	1-1/2"	9-5/16"	2-5/8"	4-1/4"	457.4
MTB6CNG	2"	11-13/16"	3-1/4"	5"	751.5



CONDUIT BODIES

Raintight Rigid Conduit Bodies with Stamped Steel Cover & Neoprene Gasket, Malleable Iron • for Rigid • IMC conduit

Application:

To provide access to conductors for pulling, splicing and maintenance.

Features:

- Tapered threaded hubs - NPT
- Suitable for use in concrete
- Wet location

Standard Materials:


Malleable iron
Stamped steel cover
Gasket - Neoprene rubber

Standard Finish:

Zinc plated with
Aluminum enamel paint

Applicable Third Party

Standards:
UL Standard: 514A, 514B
Fed. Spec. W-C-586D
NEMA: FB-1



Threaded X Conduit Bodies

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	WEIGHT PER C
MX1CNG	1/2"	5-7/16"	2-13/16"	2-1/8"	150.7
MX2CNG	3/4"	6-1/16"	2-15/16"	2-7/16"	187.7
MX3CNG	1"	7-1/8"	3-9/16"	2-11/16"	268.8
MX4CNG	1-1/4"	9-1/8"	4-7/16"	3-1/16"	453.9
MX5CNG	1-1/2"	9-1/8"	4-7/16"	3-1/4"	500.1
MX6CNG	2"	11-3/4"	5-3/8"	4-1/16"	893.6



CONDUIT BODIES

Raintight Rigid Conduit Bodies with Rollers & Stamped Steel Cover with Neoprene Gasket, Malleable Iron • for Rigid • IMC conduit

Application:
To provide access to conductors for pulling, splicing and maintenance.

Features:

- Tapered threaded hubs - NPT
- Suitable for use in concrete
- Wet location

Standard Materials:

Malleable iron

Covers - Stamped steel

Gasket - Neoprene rubber

Standard Finish:

Zinc plated with

Aluminum enamel paint

Applicable Third Party

Standards:

UL Standard: 514A, 514B

Fed. Spec. W-C-586D

NEMA: FB-1

**Protected from dirt,
rain, sleet, snow,
windblown dust.**



Threaded LB Conduit Bodies

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	WEIGHT PER C
MLB4RCNG	1-1/4"	8-1/8"	2-5/8"	3-1/4"	324.8
MLB5RCNG	1-1/2"	8-1/8"	2-5/8"	3-5/16"	369.0
MLB6RCNG	2"	10-1/2"	3-1/4"	5-1/16"	595.0
MLB7RCNG	2-1/2"	13-5/8"	4-7/16"	6-1/4"	1211.3
MLB8RCNG	3"	13-7/8"	4-7/16"	6-3/4"	1266.6
MLB9RCNG	3-1/2"	16-1/4"	5-11/16"	7-3/4"	2156.2
MLB10RCNG	4"	16-5/8"	5-11/16"	8-1/16"	2266.7



Threaded C Conduit Bodies

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	WEIGHT PER C
MC4RCNG	1-1/4"	9"	2-5/8"	3-1/4"	346.9
MC5RCNG	1-1/2"	9"	2-5/8"	3-5/16"	405.8
MC6RCNG	2"	11-1/2"	3-1/4"	3-15/16"	613.4
MC7RCNG	2-1/2"	15"	4-7/16"	4-3/4"	1321.8
MC8RCNG	3"	15-1/8"	4-7/16"	5-5/8"	1542.8
MC9RCNG	3-1/2"	18-1/8"	5-11/16"	6-1/2"	2377.2
MC10RCNG	4"	18-1/8"	5-11/16"	6-1/2"	2487.7



CONDUIT BODIES

Rigid Conduit Bodies, Malleable Iron • for Rigid • IMC conduit

Application:
To provide access to
conductors for pulling, splicing
and maintenance.


Features:

- Tapered threaded hubs - NPT
- Suitable for use in concrete

Standard Materials:
Malleable iron


Standard Finish:
Zinc plated with
Aluminum enamel paint

**Applicable Third Party
Standards:**
UL Standard: 514A
Fed. Spec. W-C-586D
NEMA: FB-1



Threaded LB Conduit Bodies

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
MLB1	1/2"	4-11/16"	1-5/16"	2-1/16"	70	70.6
MLB2	3/4"	5-3/8"	1-1/2"	2-1/4"	36	96.7
MLB3	1"	6-3/16"	1-13/16"	2-5/8"	32	142.7
MLB4	1-1/4"	8-1/8"	2-5/8"	2-3/4"	12	287.3
MLB5	1-1/2"	8-1/8"	2-5/8"	2-13/16"	12	331.5
MLB6	2"	10-1/2"	3-1/8"	4-7/16"	12	534.1
MLB7	2-1/2"	13-5/8"	4-5/16"	5-3/8"	4	1105.0
MLB8	3"	13-7/8"	4-5/16"	5-7/8"	4	1160.3
MLB9	3-1/2"	16-1/4"	5-5/8"	6-7/8"	2	1989.0
MLB10	4"	16-5/8"	5-5/8"	7-3/16"	2	2099.5



Threaded C Conduit Bodies

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
MC1	1/2"	5-3/8"	1-5/16"	1-3/8"	48	98.2
MC2	3/4"	6"	1-1/2"	1-11/16"	48	118.4
MC3	1"	7-1/16"	1-13/16"	1-7/8"	42	169.7
MC4	1-1/4"	9"	2-5/8"	2-3/4"	10	309.4
MC5	1-1/2"	9"	2-5/8"	2-13/16"	15	368.3
MC6	2"	11-1/2"	3-1/8"	3-5/16"	12	552.5
MC7	2-1/2"	15"	4-5/16"	3-7/8"	6	1215.5
MC8	3"	15-1/8"	4-5/16"	4-3/4"	4	1436.5
MC9	3-1/2"	18-1/8"	4-7/8"	5-5/8"	2	2210.0
MC10	4"	18-1/8"	4-7/8"	5-5/8"	2	2320.5



CONDUIT BODIES

Rigid Conduit Bodies, Malleable Iron • for Rigid • IMC conduit

Application:

To provide access to conductors for pulling, splicing and maintenance.

Features:

- Tapered threaded hubs - NPT
- Suitable for use in concrete

Standard Materials:

Malleable iron

Standard Finish:

Zinc plated with
Aluminum enamel paint


Applicable Third Party

Standards:

UL Standard: 514A


Fed. Spec. W-C-586D

NEMA: FB-1



Threaded LL Conduit Bodies

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
MLL1	1/2"	4-11/16"	2-1/16"	1-3/8"	70	76.3
MLL2	3/4"	5-3/8"	2-1/4"	1-11/16"	50	94.7
MLL3	1"	6-3/16"	2-5/8"	1-7/8"	30	138.1
MLL4	1-1/4"	8-1/8"	2-3/4"	2-3/4"	15	309.4
MLL5	1-1/2"	8-1/8"	3-1/2"	2-13/16"	12	331.5
MLL6	2"	10-1/2"	4-1/8"	3-5/16"	12	497.3
MLL7	2-1/2"	13-5/8"	4-11/16"	3-7/8"	6	1105.0
MLL8	3"	13-7/8"	5-7/8"	4-3/4"	4	1436.5
MLL9	3-1/2"	16-1/4"	6-1/8"	5-5/8"	2	2320.5
MLL10	4"	16-1/4"	6-15/16"	5-5/8"	2	2431.0



Threaded LR Conduit Bodies

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
MLR1	1/2"	4-11/16"	2-1/16"	1-3/8"	70	71.0
MLR2	3/4"	5-3/8"	2-1/4"	1-11/16"	50	100.0
MLR3	1"	6-3/16"	2-5/8"	1-7/8"	30	156.5
MLR4	1-1/4"	8-1/8"	2-3/4"	2-3/4"	15	331.5
MLR5	1-1/2"	8-1/8"	2-13/16"	2-13/16"	12	345.3
MLR6	2"	10-1/2"	4-7/16"	3-5/16"	12	626.2
MLR7	2-1/2"	13-5/8"	5-3/8"	3-7/8"	6	1105.0
MLR8	3"	13-7/8"	5-7/8"	4-3/4"	4	1436.5
MLR9	3-1/2"	16-1/4"	6-7/8"	5-5/8"	2	2320.5
MLR10	4"	16-5/8"	7-3/16"	5-5/8"	2	2500.0



CONDUIT BODIES

Rigid Conduit Bodies, Malleable Iron • for Rigid • IMC conduit

Application:
To provide access to conductors for pulling, splicing and maintenance.


Features:

- Tapered threaded hubs - NPT
- Suitable for use in concrete

Standard Materials:
Malleable iron


Standard Finish:
Zinc plated with
Aluminum enamel paint

Applicable Third Party Standards:
UL Standard: 514A
Fed. Spec. W-C-586D
NEMA: FB-1



Threaded T Conduit Bodies

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
MT1	1/2"	5-3/8"	2-1/16"	1-5/16"	60	110.5
MT2	3/4"	6"	2-1/4"	1-1/2"	40	137.0
MT3	1"	7-1/16"	2-5/8"	1-13/16"	25	196.4
MT4	1-1/4"	9"	2-3/4"	2-5/8"	15	331.5
MT5	1-1/2"	9"	3-1/2"	2-5/8"	12	368.3
MT6	2"	11-1/2"	4-1/8"	3-1/8"	8	663.0
MT7	2-1/2"	15"	5-11/16"	4-5/16"	4	1270.8
MT8	3"	15-1/8"	5-7/8"	4-5/16"	4	1547.0
MT9	3-1/2"	18-1/8"	6-13/16"	4-7/8"	2	2541.5
MT10	4"	18-1/8"	7-3/16"	4-7/8"	2	2541.5



Threaded TB Conduit Bodies

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
MTB1	1/2"	5-1/4"	1-5/16"	1-5/16"	42	88.4
MTB2	3/4"	6-1/16"	1-9/16"	1-9/16"	60	119.7
MTB3	1"	7-1/8"	1-13/16"	1-13/16"	28	197.3
MTB4	1-1/4"	9-5/16"	2-7/16"	3-3/4"	15	342.6
MTB5	1-1/2"	9-5/16"	2-9/16"	3-3/4"	15	419.9
MTB6	2"	11-13/16"	3-3/16"	4-1/8"	8	690.6



CONDUIT BODIES

Rigid Conduit Bodies, Malleable Iron • for Rigid • IMC conduit

Application:

To provide access to conductors for pulling, splicing and maintenance.

Features:

- Tapered threaded hubs - NPT
- Suitable for use in concrete

Standard Materials:

Malleable iron


Standard Finish:

Zinc plated with
Aluminum enamel paint

Applicable Third Party

Standards:

UL Standard: 514A
Fed. Spec. W-C-586D
NEMA: FB-1

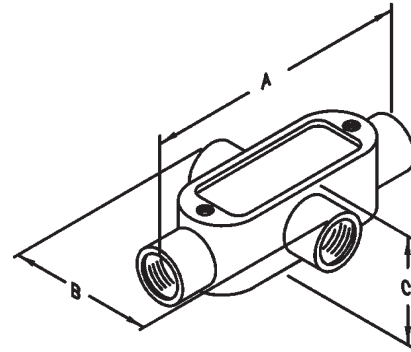

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
MX1	1/2"	5-7/16"	2-13/16"	1-3/4"	42	138.8
MX2	3/4"	6-1/16"	2-15/16"	2"	30	172.1
MX3	1"	7-1/8"	3-9/16"	2-1/4"	21	246.8
MX4	1-1/4"	9-1/8"	4-7/16"	2-9/16"	12	416.4
MX5	1-1/2"	9-1/8"	4-7/16"	2-3/4"	12	462.6
MX6	2"	11-3/4"	5-3/8"	3-7/16"	6	832.7



CONDUIT BODIES

Rigid Conduit Bodies with Rollers, Malleable Iron • for Rigid • IMC conduit

Application:

To provide access to conductors for pulling, splicing and maintenance.

Features:

- Tapered threaded hubs - NPT
- Suitable for use in concrete
- Rollers provide ease in wire pulling

Standard Materials:

Malleable iron
Steel rollers

Standard Finish:

Zinc plated with
Aluminum enamel paint


Applicable Third Party

Standards:

UL Standard: 514A


Fed. Spec. W-C-586D

NEMA: FB-1



Threaded LB Conduit Bodies with Rollers

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
MLB4R	1-1/4"	8-1/8"	2-5/8"	2-3/4"	12	287.3
MLB5R	1-1/2"	8-1/8"	2-5/8"	2-13/16"	12	331.5
MLB6R	2"	10-1/2"	3-1/8"	4-7/16"	12	534.1
MLB7R	2-1/2"	13-5/8"	4-5/16"	5-3/8"	4	1105.0
MLB8R	3"	13-7/8"	4-5/16"	5-7/8"	4	1160.3
MLB9R	3-1/2"	16-1/4"	5-5/8"	6-7/8"	2	1989.0
MLB10R	4"	16-5/8"	5-5/8"	7-3/16"	2	2099.5



Threaded C Conduit Bodies with Rollers

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
MC4R	1-1/4"	9"	2-5/8"	2-3/4"	10	309.4
MC5R	1-1/2"	9"	2-5/8"	2-13/16"	15	368.3
MC6R	2"	11-1/2"	3-1/8"	3-5/16"	12	552.5
MC7R	2-1/2"	15"	4-5/16"	3-7/8"	6	1215.5
MC8R	3"	15-1/8"	4-5/16"	4-3/4"	4	1436.5
MC9R	3-1/2"	18-1/8"	4-7/8"	5-5/8"	2	2210.0
MC10R	4"	18-1/8"	4-7/8"	5-5/8"	2	2320.5



CONDUIT BODIES

Raised Dome Stamped Steel Conduit Body Covers


Application:
To cover conduit body opening.

Features:

- Raised dome affords additional wiring room
- Captive steel screws

Standard Materials:
Steel cover
Steel screws

Applicable Third Party Standards:
UL Standard: 514A
Fed. Spec. W-C-586D
NEMA: FB-1

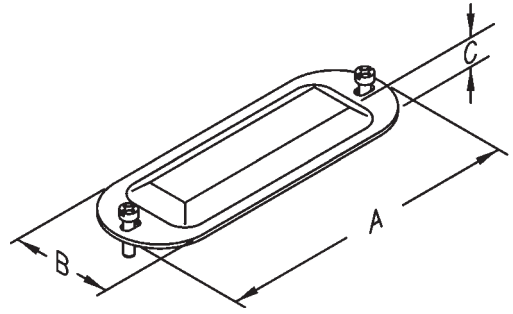

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
C1	1/2"	3-7/8"	1-5/16"	1/4"	200	8.8
C2	3/4"	4-5/8"	1-1/2"	5/16"	200	12.0
C3	1"	5-5/16"	1-3/4"	5/16"	100	16.0
C4	1-1/4" - 1-1/2"	7-3/16"	2-1/2"	3/8"	100	30.6
C5	2"	9-1/2"	3-3/16"	1/2"	50	50.8
C6	2-1/2" - 3"	12-1/4"	4-5/16"	3/4"	20	91.1
C7	3-1/2" - 4"	14-7/8"	5-5/8"	3/4"	20	138.4



CONDUIT BODIES

Malleable Iron Conduit Body Covers

Application:
To cover conduit body opening.

Features:

- Supplied with steel captive screws
- Sizes 2-1/2" thru 4" with raised dome affords additional wiring room

Standard Materials:
Malleable iron

Standard Finish:
Zinc plated

Applicable Third Party Standards:
UL Standard: 514A
Fed. Spec. W-C-586D
NEMA: FB-1




1/2" thru 2"



2-1/2" thru 4"

Raised dome affords additional wiring room

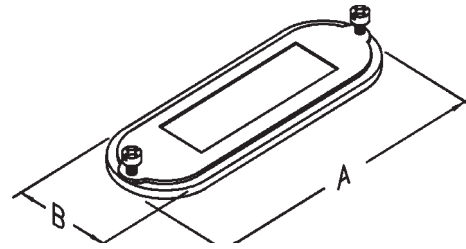

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
CM1	1/2"	3-15/16"	1-5/16"	3/16"	100	19.3
CM2	3/4"	4-5/8"	1-1/2"	3/16"	100	24.2
CM3	1"	5-5/16"	1-3/4"	3/16"	50	37.0
CM4	1-1/4" - 1-1/2"	7-3/16"	2-1/2"	1/4"	50	92.8
CM5	2"	9-1/2"	3-3/16"	5/16"	25	189.0
CM6	2-1/2" - 3"	12-1/4"	4-5/16"	1-1/16"	10	358.8
CM7	3-1/2" - 4"	14-7/8"	5-5/8"	1-1/8"	10	539.7



CONDUIT BODIES

Aluminum Die Cast Threaded LB Conduit Bodies For Rigid • IMC conduit

Application:

To provide access to conductors for pulling, splicing and maintenance.

Features:


- Tapered threaded hubs - NPT
- Suitable for use in concrete
- Wet location

Standard Materials:


Die cast Aluminum
Copper free
Covers - Stamped aluminum
Gasket - Neoprene rubber

Applicable Third Party

Standards:
UL Standard: 514A
Fed. Spec. W-C-586D
NEMA: FB-1



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
ALB1	1/2"	4-5/16"	1-5/16"	2-3/16"	100	24.3
ALB2	3/4"	5-1/16"	1-9/16"	2-7/16"	50	37.2
ALB3	1"	5-7/8"	1-3/4"	2-3/4"	25	46.3
ALB4	1-1/4"	7-13/16"	2-1/2"	3-7/16"	10	97.7
ALB5	1-1/2"	7-13/16"	2-1/2"	3-7/16"	10	90.9
ALB6	2"	10-1/16"	3-1/8"	4-5/16"	5	221.6
ALB7	2-1/2"	12-13/16"	4-1/2"	5-5/16"	1	365.7
ALB8	3"	12-13/16"	4-1/2"	5-15/16"	1	429.7
ALB9	3-1/2"	15-5/8"	5-9/16"	7-1/16"	1	936.9
ALB10	4"	15-5/8"	5-9/16"	7-1/16"	1	851.4



Aluminum Die Cast Threaded LB Conduit Bodies with
Stamped Aluminum Cover & Neoprene Gasket

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
ALB1CG	1/2"	4-5/16"	1-5/16"	2-7/16"	100	30.5
ALB2CG	3/4"	5-1/16"	1-9/16"	2-11/16"	50	44.6
ALB3CG	1"	5-7/8"	1-3/4"	3"	25	56.3
ALB4CG	1-1/4"	7-13/16"	2-1/2"	3-11/16"	10	116.8
ALB5CG	1-1/2"	7-13/16"	2-1/2"	3-11/16"	10	110.0
ALB6CG	2"	10-1/16"	3-1/8"	4-9/16"	5	253.9
ALB7CG	2-1/2"	12-13/16"	4-1/2"	5-9/16"	1	427.4
ALB8CG	3"	12-13/16"	4-1/2"	6-3/16"	1	491.4
ALB9CG	3-1/2"	15-5/8"	5-9/16"	7-5/16"	1	1060.1
ALB10CG	4"	15-5/8"	5-9/16"	7-5/16"	1	974.6



CONDUIT BODIES

Aluminum Die Cast Theaded C Conduit Bodies For Rigid • IMC conduit

Application:

To provide access to conductors for pulling, splicing and maintenance.

Features:


- Tapered threaded hubs - NPT
- Suitable for use in concrete
- Wet Location

Standard Materials:


Die cast aluminum
Copper free
Covers - Stamped aluminum
Gasket - Neoprene rubber

Applicable Third Party Standards:

UL Standard: 514A
Fed. Spec. W-C-586D
NEMA: FB-1



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
AC1	1/2"	4-11/16"	1-3/8"	1-5/16"	100	21.3
AC2	3/4"	5-1/2"	1-9/16"	1-5/8"	50	33.1
AC3	1"	6-7/16"	1-3/4"	1-7/8"	25	46.3
AC4	1-1/4"	8-5/16"	2-1/2"	2-1/2"	10	81.9
AC5	1-1/2"	8-3/8"	2-1/2"	2-1/2"	10	85.0
AC6	2"	10-5/16"	3-3/16"	3-3/8"	5	187.5
AC7	2-1/2"	13-1/8"	4-1/2"	4"	1	325.0
AC8	3"	13-3/16"	4-9/16"	4-9/16"	1	398.8
AC9	3-1/2"	16-1/8"	5-11/16"	5-5/8"	1	975.0
AC10	4"	16-1/8"	5-11/16"	5-5/8"	1	875.0



Aluminum Die Cast Threaded C Conduit Bodies with
Stamped Aluminum Cover & Neoprene Gasket

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
AC1CG	1/2"	4-11/16"	1-3/8"	1-9/16"	100	27.5
AC2CG	3/4"	5-1/2"	1-9/16"	1-3/4"	50	40.5
AC3CG	1"	6-7/16"	1-3/4"	2-1/8"	25	56.3
AC4CG	1-1/4"	8-5/16"	2-1/2"	2-3/4"	10	101.0
AC5CG	1-1/2"	8-3/8"	2-1/2"	2-3/4"	10	104.1
AC6CG	2"	10-5/16"	3-3/16"	3-5/8"	5	219.8
AC7CG	2-1/2"	13-1/8"	4-1/2"	4-1/4"	1	386.7
AC8CG	3"	13-3/16"	4-9/16"	4-13/16"	1	460.5
AC9CG	3-1/2"	16-1/8"	5-11/16"	6"	1	1098.2
AC10CG	4"	16-1/8"	5-11/16"	6"	1	998.2



CONDUIT BODIES

Aluminum Die Cast Threaded LL Conduit Bodies For Rigid • IMC conduit

Application:

To provide access to conductors for pulling, splicing and maintenance.

Features:


- Tapered threaded hubs - NPT
- Suitable for use in concrete
- Wet Location

Standard Materials:


Die cast aluminum
Copper free
Covers - Stamped aluminum
Gasket - Neoprene rubber

Applicable Third Party

Standards:
UL Standard: 514A
Fed. Spec. W-C-586D
NEMA: FB-1



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
ALL1	1/2"	4-5/16"	2-1/16"	1-3/8"	100	24.5
ALL2	3/4"	5-1/16"	2-1/4"	1-5/8"	50	36.8
ALL3	1"	5-7/8"	2-5/8"	1-7/8"	25	45.2
ALL4	1-1/4"	7-13/16"	3-5/8"	2-1/2"	10	97.9
ALL5	1-1/2"	7-13/16"	3-5/8"	2-1/2"	10	91.9
ALL6	2"	10-1/16"	4-7/16"	3-3/8"	5	245.0
ALL7	2-1/2"	12-13/16"	5-3/4"	4"	1	387.6
ALL8	3"	12-13/16"	5-3/4"	4-1/2"	1	439.2
ALL9	3-1/2"	15-5/8"	7-11/16"	5-5/8"	1	923.7
ALL10	4"	15-5/8"	7-11/16"	5-5/8"	1	881.8



Aluminum Die Cast Threaded LL Conduit Bodies with
Stamped Aluminum Cover & Neoprene Gasket

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
ALL1CG	1/2"	4-5/16"	2-1/16"	1-5/8"	100	30.7
ALL2CG	3/4"	5-1/16"	2-1/4"	1-7/8"	50	44.2
ALL3CG	1"	5-7/8"	2-5/8"	2-1/8"	25	55.2
ALL4CG	1-1/4"	7-13/16"	3-5/8"	2-3/4"	10	117.0
ALL5CG	1-1/2"	7-13/16"	3-5/8"	2-3/4"	10	111.0
ALL6CG	2"	10-1/16"	4-7/16"	3-5/8"	5	277.3
ALL7CG	2-1/2"	12-13/16"	5-3/4"	4-1/4"	1	419.9
ALL8CG	3"	12-13/16"	5-3/4"	4-3/4"	1	500.9
ALL9CG	3-1/2"	15-5/8"	7-11/16"	5-7/8"	1	1046.9
ALL10CG	4"	15-5/8"	7-11/16"	5-7/8"	1	1005.0



CONDUIT BODIES

Aluminum Die Cast Threaded LR Conduit Bodies For Rigid • IMC conduit

Application:

To provide access to conductors for pulling, splicing and maintenance.

Features:


- Tapered threaded hubs - NPT
- Suitable for use in concrete
- Wet location

Standard Materials:


Die cast aluminum
Copper free
Covers - Stamped aluminum
Gasket - Neoprene rubber

Applicable Third Party

Standards:
UL Standard: 514A
Fed. Spec. W-C-586D
NEMA: FB-1



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
ALR1	1/2"	4-5/16"	2-1/16"	1-3/8"	100	22.7
ALR2	3/4"	5-1/16"	2-1/4"	1-5/8"	50	37.5
ALR3	1"	5-7/8"	2-5/8"	1-7/8"	25	48.7
ALR4	1-1/4"	7-13/16"	3-5/8"	2-1/2"	10	98.1
ALR5	1-1/2"	7-13/16"	3-5/8"	2-1/2"	10	93.9
ALR6	2"	10-1/16"	4-7/16"	3-3/8"	5	253.5
ALR7	2-1/2"	12-13/16"	5-3/4"	4"	1	366.2
ALR8	3"	12-13/16"	5-3/4"	4-1/2"	1	406.3
ALR9	3-1/2"	15-5/8"	7-11/16"	5-5/8"	1	928.1
ALR10	4"	15-5/8"	7-11/16"	5-5/8"	1	901.7



Aluminum Die Cast Threaded LR Conduit Bodies with
Stamped Aluminum Cover & Neoprene Gasket

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
ALR1CG	1/2"	4-5/16"	2-1/16"	1-5/8"	100	28.9
ALR2CG	3/4"	5-1/16"	2-1/4"	1-7/8"	50	44.9
ALR3CG	1"	5-7/8"	2-5/8"	2-1/8"	25	58.7
ALR4CG	1-1/4"	7-13/16"	3-5/8"	2-3/4"	10	117.2
ALR5CG	1-1/2"	7-13/16"	3-5/8"	2-3/4"	10	113.0
ALR6CG	2"	10-1/16"	4-7/16"	3-5/8"	5	285.8
ALR7CG	2-1/2"	12-13/16"	5-3/4"	4-1/4"	1	427.9
ALR8CG	3"	12-13/16"	5-3/4"	4-3/4"	1	468.0
ALR9CG	3-1/2"	15-5/8"	7-11/16"	5-7/8"	1	1051.3
ALR10CG	4"	15-5/8"	7-11/16"	5-7/8"	1	1024.9



CONDUIT BODIES

Aluminum Die Cast Threaded T Conduit Bodies For Rigid • IMC conduit

Application:

To provide access to conductors for pulling, splicing and maintenance.

Features:


- Tapered threaded hubs - NPT
- Suitable for use in concrete
- Wet location

Standard Materials:


Die cast aluminum
Copper free
Covers - Stamped aluminum
Gasket - Neoprene rubber

Applicable Third Party

Standards:
UL Standard: 514A
Fed. Spec. W-C-586D
NEMA: FB-1



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
AT1	1/2"	4-3/4"	2-1/16"	1-3/8"	100	23.2
AT2	3/4"	5-9/16"	2-1/4"	1-5/8"	50	37.5
AT3	1"	6-7/16"	2-5/8"	1-7/8"	25	53.3
AT4	1-1/4"	8-1/4"	3-9/16"	2-1/2"	10	99.9
AT5	1-1/2"	8-3/8"	3-9/16"	2-1/2"	10	97.6
AT6	2"	10-11/16"	4-3/8"	3-1/8"	5	264.5
AT7	2-1/2"	13-1/4"	5-3/4"	4"	1	374.8
AT8	3"	13-1/4"	5-3/4"	4-1/2"	1	444.2
AT9	3-1/2"	16-1/8"	7-11/16"	5-5/8"	1	1146.4
AT10	4"	16-1/8"	7-11/16"	5-5/8"	1	1079.2



Aluminum Die Cast Threaded T Conduit Bodies with
Stamped Aluminum Cover & Neoprene Gasket

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
AT1CG	1/2"	4-3/4"	2-1/16"	1-5/8"	100	29.4
AT2CG	3/4"	5-9/16"	2-1/4"	1-7/8"	50	44.9
AT3CG	1"	6-7/16"	2-5/8"	2-1/8"	25	63.3
AT4CG	1-1/4"	8-1/4"	3-9/16"	2-3/4"	10	119.0
AT5CG	1-1/2"	8-3/8"	3-9/16"	2-3/4"	10	116.7
AT6CG	2"	10-11/16"	4-3/8"	3-5/8"	5	296.8
AT7CG	2-1/2"	13-1/4"	5-3/4"	4-1/4"	1	436.5
AT8CG	3"	13-1/4"	5-3/4"	4-3/4"	1	505.9
AT9CG	3-1/2"	16-1/8"	7-11/16"	5-7/8"	1	1269.6
AT10CG	4"	16-1/8"	7-11/16"	5-7/8"	1	1202.4



CONDUIT BODIES

Aluminum Die Cast Threaded TB Conduit Bodies For Rigid • IMC conduit

Application:

To provide access to conductors for pulling, splicing and maintenance.

Features:


- Tapered threaded hubs - NPT
- Suitable for use in concrete
- Wet location

Standard Materials:


Die cast aluminum
Copper free
Covers - Stamped aluminum
Gasket - Neoprene rubber

Applicable Third Party

Standards:
UL Standard: 514A
Fed. Spec. W-C-586D
NEMA: FB-1



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
ATB1	1/2"	4-3/4"	1-3/8"	2-1/8"	100	29.1
ATB2	3/4"	5-1/2"	1-9/16"	2-3/8"	50	42.3
ATB3	1"	6-1/2"	1-13/16"	2-3/4"	25	58.2
ATB4	1-1/4"	8-1/4"	2-7/16"	3-1/2"	10	110.3
ATB5	1-1/2"	8-1/4"	2-7/16"	3-1/2"	10	108.8
ATB6	2"	10-1/2"	3-3/16"	4-1/2"	5	192.2



Aluminum Die Cast Threaded TB Conduit Bodies with Stamped Aluminum Cover & Neoprene Gasket

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
ATB1CG	1/2"	4-3/4"	1-3/8"	2-3/8"	100	34.8
ATB2CG	3/4"	5-1/2"	1-9/16"	2-5/8"	50	49.2
ATB3CG	1"	6-1/2"	1-13/16"	3"	25	67.7
ATB4CG	1-1/4"	8-1/4"	2-7/16"	3-3/4"	10	128.4
ATB5CG	1-1/2"	8-1/4"	2-7/16"	3-3/4"	10	126.9
ATB6CG	2"	10-1/2"	3-3/16"	4-3/4"	5	222.5



CONDUIT BODIES

Aluminum Die Cast Threaded X Conduit Bodies For Rigid • IMC conduit

Application:

To provide access to conductors for pulling, splicing and maintenance.

Features:


- Tapered threaded hubs - NPT
- Suitable for use in concrete
- Wet location

Standard Materials:


Die cast aluminum
Copper free
Covers - Stamped aluminum
Gasket - Neoprene rubber

Applicable Third Party

Standards:
UL Standard: 514A
Fed. Spec. W-C-586D
NEMA: FB-1



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
AX1	1/2"	4-3/4"	2-11/16"	1-3/8"	100	31.4
AX2	3/4"	5-1/2"	3"	1-5/8"	50	47.1
AX3	1"	6-1/2"	3-1/2"	1-7/8"	25	61.9
AX4	1-1/4"	8-1/4"	4-1/2"	2-1/2"	10	117.7
AX5	1-1/2"	8-1/4"	4-1/2"	2-1/2"	10	117.9
AX6	2"	10-1/2"	5-3/8"	3-3/8"	5	212.5



Aluminum Die Cast Threaded X Conduit Bodies with
Stamped Aluminum Cover & Neoprene Gasket

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
AX1CG	1/2"	4-3/4"	2-11/16"	1-5/8"	100	37.1
AX2CG	3/4"	5-1/2"	3"	1-7/8"	50	54.0
AX3CG	1"	6-1/2"	3-1/2"	2-1/8"	25	71.4
AX4CG	1-1/4"	8-1/4"	4-1/2"	2-3/4"	10	135.8
AX5CG	1-1/2"	8-1/4"	4-1/2"	2-3/4"	10	136.0
AX6CG	2"	10-1/2"	5-3/8"	3-5/8"	5	242.8



CONDUIT BODIES

Aluminum Die Cast Combination LB Conduit Bodies For EMT • IMC • Rigid conduit

Application:

To provide access to conductors for pulling, splicing and maintenance.

Features:


- Tapered threaded hubs - NPT
- Suitable for use in concrete

Standard Materials:


Die cast aluminum
Copper free
Steel screws
Covers - Stamped aluminum
Gasket - Neoprene rubber

Applicable Third Party

Standards:
UL Standard: 514A
Fed. Spec. W-C-586D
NEMA: FB-1



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
ACLB1	1/2"	4-5/16"	1-5/16"	2-3/16"	100	24.3
ACLB2	3/4"	5-1/16"	1-9/16"	2-7/16"	50	37.2
ACLB3	1"	5-7/8"	1-3/4"	2-3/4"	25	46.3
ACLB4	1-1/4"	7-13/16"	2-1/2"	3-7/16"	10	97.7
ACLB5	1-1/2"	7-13/16"	2-1/2"	3-7/16"	10	90.9
ACLB6	2"	10-1/16"	3-1/8"	4-5/16"	5	221.6



Aluminum Die Cast Combination LB Conduit Bodies with Stamped Aluminum Cover & Neoprene Gasket

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
ACLB1CG	1/2"	4-5/16"	1-5/16"	2-7/16"	100	30.5
ACLB2CG	3/4"	5-1/16"	1-9/16"	2-11/16"	50	44.6
ACLB3CG	1"	5-7/8"	1-3/4"	3"	25	56.3
ACLB4CG	1-1/4"	7-13/16"	2-1/2"	3-11/16"	10	116.8
ACLB5CG	1-1/2"	7-13/16"	2-1/2"	3-11/16"	10	110.0
ACLB6CG	2"	10-1/16"	3-1/8"	4-9/16"	5	253.9



CONDUIT BODIES

Aluminum Die Cast Combination C Conduit Bodies For EMT • IMC • Rigid conduit

Application:

To provide access to conductors for pulling, splicing and maintenance.

Features:

- Tapered threaded hubs - NPT
- Suitable for use in concrete


Standard Materials:

Die cast aluminum
Copper free
Steel screws
Covers - Stamped aluminum
Gasket - Neoprene rubber


Applicable Third Party

Standards:

UL Standard: 514A
Fed. Spec. W-C-586D
NEMA: FB-1



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
ACC1	1/2"	4-11/16"	1-3/8"	1-5/16"	100	21.3
ACC2	3/4"	5-1/2"	1-9/16"	1-5/8"	50	33.1
ACC3	1"	6-7/16"	1-3/4"	1-7/8"	25	46.3
ACC4	1-1/4"	8-5/16"	2-1/2"	2-1/2"	10	81.9
ACC5	1-1/2"	8-3/8"	2-1/2"	2-1/2"	10	85.0
ACC6	2"	10-5/16"	3-3/16"	3-3/8"	5	187.5



Aluminum Die Cast Combination C Conduit Bodies with Stamped Aluminum Cover & Neoprene Gasket

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
ACC1CG	1/2"	4-11/16"	1-3/8"	1-9/16"	100	27.5
ACC2CG	3/4"	5-1/2"	1-9/16"	1-3/4"	50	40.5
ACC3CG	1"	6-7/16"	1-3/4"	2-1/8"	25	56.3
ACC4CG	1-1/4"	8-5/16"	2-1/2"	2-3/4"	10	101.0
ACC5CG	1-1/2"	8-3/8"	2-1/2"	2-3/4"	10	104.1
ACC6CG	2"	10-5/16"	3-3/16"	3-5/8"	5	219.8



CONDUIT BODIES

Aluminum Die Cast Combination LL Conduit Bodies For EMT • IMC • Rigid conduit

Application:

To provide access to conductors for pulling, splicing and maintenance.

Features:


- Tapered threaded hubs - NPT
- Suitable for use in concrete

Standard Materials:


Die cast aluminum
Copper free
Steel screws
Covers - Stamped aluminum
Gasket - Neoprene rubber

Applicable Third Party Standards:

UL Standard: 514A
Fed. Spec. W-C-586D
NEMA: FB-1



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
ACLL1	1/2"	4-5/16"	2-1/16"	1-3/8"	100	24.5
ACLL2	3/4"	5-1/16"	2-1/4"	1-5/8"	50	36.8
ACLL3	1"	5-7/8"	2-5/8"	1-7/8"	25	45.2
ACLL4	1-1/4"	7-13/16"	3-5/8"	2-1/2"	10	97.9
ACLL5	1-1/2"	7-13/16"	3-5/8"	2-1/2"	10	91.9
ACLL6	2"	10-1/16"	4-7/16"	3-3/8"	5	245.0



Aluminum Die Cast Combination LL Conduit Bodies with Stamped Aluminum Cover & Neoprene Gasket

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
ACLL1CG	1/2"	4-5/16"	2-1/16"	1-5/8"	100	30.7
ACLL2CG	3/4"	5-1/16"	2-1/4"	1-7/8"	50	44.2
ACLL3CG	1"	5-7/8"	2-5/8"	2-1/8"	25	55.2
ACLL4CG	1-1/4"	7-13/16"	3-5/8"	2-3/4"	10	117.0
ACLL5CG	1-1/2"	7-13/16"	3-5/8"	2-3/4"	10	111.0
ACLL6CG	2"	10-1/16"	4-7/16"	3-5/8"	5	277.3



CONDUIT BODIES

Aluminum Die Cast Combination LR Conduit Bodies For EMT • IMC • Rigid conduit


Application:
To provide access to
conductors for pulling, splicing
and maintenance.

Features:


- Tapered threaded hubs - NPT
- Suitable for use in concrete

Standard Materials:
Die cast aluminum
Copper free
Steel screws
Covers - Stamped aluminum
Gasket - Neoprene rubber

**Applicable Third Party
Standards:**
UL Standard: 514A
Fed. Spec. W-C-586D
NEMA: FB-1



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
ACLR1	1/2"	4-5/16"	2-1/16"	1-3/8"	100	22.7
ACLR2	3/4"	5-1/16"	2-1/4"	1-5/8"	50	37.5
ACLR3	1"	5-7/8"	2-5/8"	1-7/8"	25	48.7
ACLR4	1-1/4"	7-13/16"	3-5/8"	2-1/2"	10	98.1
ACLR5	1-1/2"	7-13/16"	3-5/8"	2-1/2"	10	93.9
ACLR6	2"	10-1/16"	4-7/16"	3-3/8"	5	253.5



Aluminum Die Cast Combination LR Conduit Bodies with
Stamped Aluminum Cover & Neoprene Gasket

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
ACLR1CG	1/2"	4-5/16"	2-1/16"	1-5/8"	100	28.9
ACLR2CG	3/4"	5-1/16"	2-1/4"	1-7/8"	50	44.9
ACLR3CG	1"	5-7/8"	2-5/8"	2-1/8"	25	58.7
ACLR4CG	1-1/4"	7-13/16"	3-5/8"	2-3/4"	10	117.2
ACLR5CG	1-1/2"	7-13/16"	3-5/8"	2-3/4"	10	113.0
ACLR6CG	2"	10-1/16"	4-7/16"	3-5/8"	5	285.8



CONDUIT BODIES

Aluminum Die Cast Combination T Conduit Bodies For EMT • IMC • Rigid conduit

Application:

To provide access to conductors for pulling, splicing and maintenance.


Features:

- Tapered threaded hubs - NPT
- Suitable for use in concrete


Standard Materials:

Die cast aluminum
Copper free
Steel screws
Covers - Stamped aluminum
Gasket - Neoprene rubber

UL Standard: 514A
Fed. Spec. W-C-586D
NEMA: FB-1



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
ACT1	1/2"	4-3/4"	2-1/16"	1-3/8"	100	23.2
ACT2	3/4"	5-9/16"	2-1/4"	1-5/8"	50	37.5
ACT3	1"	6-7/16"	2-5/8"	1-7/8"	25	53.3
ACT4	1-1/4"	8-1/4"	3-9/16"	2-1/2"	10	99.9
ACT5	1-1/2"	8-3/8"	3-9/16"	2-1/2"	10	97.6
ACT6	2"	10-11/16"	4-3/8"	3-1/8"	5	264.5



Aluminum Die Cast Combination T Conduit Bodies with
Stamped Aluminum Cover & Neoprene Gasket

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
ACT1CG	1/2"	4-3/4"	2-1/16"	1-5/8"	100	29.4
ACT2CG	3/4"	5-9/16"	2-1/4"	1-7/8"	50	44.9
ACT3CG	1"	6-7/16"	2-5/8"	2-1/8"	25	63.3
ACT4CG	1-1/4"	8-1/4"	3-9/16"	2-3/4"	10	119.0
ACT5CG	1-1/2"	8-3/8"	3-9/16"	2-3/4"	10	116.7
ACT6CG	2"	10-11/16"	4-3/8"	3-5/8"	5	296.8



CONDUIT BODIES


Aluminum Die Cast Set Screw LB Conduit Bodies For EMT conduit

Application:
To provide access to
conductors for pulling,
splicing and maintenance.


Features:
• Suitable for use in concrete

Standard Materials:
Die cast aluminum
Copper free
Steel screws

**Applicable Third Party
Standards:**
UL Standard: 514A
Fed. Spec. W-C-586D
NEMA: FB-1



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
ALBS1	1/2"	4-5/16"	1-5/16"	2-3/16"	100	25.0
ALBS2	3/4"	5-1/16"	1-9/16"	2-7/16"	50	38.4
ALBS3	1"	5-7/8"	1-3/4"	2-3/4"	25	47.9
ALBS4	1-1/4"	7-13/16"	2-1/2"	3-7/16"	10	100.6
ALBS5	1-1/2"	7-13/16"	2-1/2"	3-7/16"	10	94.5
ALBS6	2"	10-1/16"	3-1/8"	4-5/16"	5	229.4
ALBS7	2-1/2"	12-13/16"	4-1/2"	5-5/16"	1	365.7
ALBS8	3"	12-13/16"	4-1/2"	5-15/16"	1	429.7
ALBS9	3-1/2"	15-5/8"	5-9/16"	7-1/16"	1	936.9
ALBS10	4"	15-5/8"	5-9/16"	7-1/16"	1	851.4



Aluminum Die Cast Set Screw LB Conduit Bodies with
Stamped Aluminum Cover & Neoprene Gasket

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
ALBS1CG	1/2"	4-5/16"	1-5/16"	2-7/16"	100	31.4
ALBS2CG	3/4"	5-1/16"	1-9/16"	2-11/16"	50	46.0
ALBS3CG	1"	5-7/8"	1-3/4"	3"	25	58.2
ALBS4CG	1-1/4"	7-13/16"	2-1/2"	3-11/16"	10	120.9
ALBS5CG	1-1/2"	7-13/16"	2-1/2"	3-11/16"	10	113.96
ALBS6CG	2"	10-1/16"	3-1/8"	4-5/16"	5	261.5
ALBS7CG	2-1/2"	12-13/16"	4-1/2"	5-11/16"	1	424.4
ALBS8CG	3"	12-13/16"	4-1/2"	6-5/16"	1	488.4
ALBS9CG	3-1/2"	15-5/8"	5-9/16"	7-7/16"	1	1055.1
ALBS10CG	4"	15-5/8"	5-9/16"	7-7/16"	1	969.6



CONDUIT BODIES


Aluminum Die Cast Set Screw C Conduit Bodies For EMT conduit

Application:
To provide access to
conductors for pulling,
splicing and maintenance.


Features:
• Suitable for use in concrete

Standard Materials:
Die cast aluminum
Copper free
Steel screws

**Applicable Third Party
Standards:**
UL Standard: 514A
Fed. Spec. W-C-586D
NEMA: FB-1



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
ACS1	1/2"	4-11/16"	1-3/8"	1-5/16"	100	21.9
ACS2	3/4"	5-1/2"	1-9/16"	1-5/8"	50	34.3
ACS3	1"	6-7/16"	1-3/4"	1-7/8"	25	48.1
ACS4	1-1/4"	8-5/16"	2-1/2"	2-1/2"	10	85.1
ACS5	1-1/2"	8-3/8"	2-1/2"	2-1/2"	10	89.2
ACS6	2"	10-5/16"	3-3/16"	3-3/8"	5	194.6
ACS7	2-1/2"	13-1/8"	4-1/2"	4"	1	325.0
ACS8	3"	13-3/16"	4-9/16"	4-9/16"	1	398.8
ACS9	3-1/2"	16-1/8"	5-11/16"	5-5/8"	1	975.0
ACS10	4"	16-1/8"	5-11/16"	5-5/8"	1	775.0



Aluminum Die Cast Set Screw C Conduit Bodies with
Stamped Aluminum Cover & Neoprene Gasket

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
ACS1CG	1/2"	4-11/16"	1-3/8"	1-9/16"	100	28.4
ACS2CG	3/4"	5-1/2"	1-9/16"	1-3/4"	50	41.9
ACS3CG	1"	6-7/16"	1-3/4"	2-1/8"	25	58.3
ACS4CG	1-1/4"	8-5/16"	2-1/2"	2-3/4"	10	104.5
ACS5CG	1-1/2"	8-3/8"	2-1/2"	2-3/4"	10	107.7
ACS6CG	2"	10-5/16"	3-3/16"	3-5/8"	5	226.5
ACS7CG	2-1/2"	13-1/8"	4-1/2"	4-3/8"	1	383.7
ACS8CG	3"	13-3/16"	4-9/16"	4-15/16"	1	457.5
ACS9CG	3-1/2"	16-1/8"	5-11/16"	6"	1	1093.2
ACS10CG	4"	16-1/8"	5-11/16"	6"	1	893.2



CONDUIT BODIES


Aluminum Die Cast Set Screw LL Conduit Bodies For EMT conduit

Application:
To provide access to
conductors for pulling, splicing
and maintenance.


Features:
• Suitable for use in concrete

Standard Materials:
Die cast aluminum
Copper free
Steel screws

**Applicable Third Party
Standards:**
UL Standard: 514A
Fed. Spec. W-C-586D
NEMA: FB-1



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
ALLS1	1/2"	4-5/16"	2-1/16"	1-3/8"	100	25.2
ALLS2	3/4"	5-1/16"	2-1/4"	1-5/8"	50	37.9
ALLS3	1"	5-7/8"	2-5/8"	1-7/8"	25	46.8
ALLS4	1-1/4"	7-13/16"	3-5/8"	2-1/2"	10	100.8
ALLS5	1-1/2"	7-13/16"	3-5/8"	2-1/2"	10	95.2
ALLS6	2"	10-1/16"	4-7/16"	3-3/8"	5	252.3
ALLS7	2-1/2"	12-13/16"	5-3/4"	4"	1	387.6
ALLS8	3"	12-13/16"	5-3/4"	4-1/2"	1	439.2
ALLS9	3-1/2"	15-5/8"	7-11/16"	5-5/8"	1	923.7
ALLS10	4"	15-5/8"	7-11/16"	5-5/8"	1	881.8



Aluminum Die Cast Set Screw LL Conduit Bodies with
Stamped Aluminum Cover & Neoprene Gasket

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
ALLS1CG	1/2"	4-5/16"	2-1/16"	1-5/8"	100	31.6
ALLS2CG	3/4"	5-1/16"	2-1/4"	1-7/8"	50	45.7
ALLS3CG	1"	5-7/8"	2-5/8"	2-1/8"	25	57.1
ALLS4CG	1-1/4"	7-13/16"	3-5/8"	2-3/4"	10	121.1
ALLS5CG	1-1/2"	7-13/16"	3-5/8"	2-3/4"	10	114.9
ALLS6CG	2"	10-1/16"	4-7/16"	3-5/8"	5	287.8
ALLS7CG	2-1/2"	12-13/16"	5-3/4"	4-3/8"	1	446.3
ALLS8CG	3"	12-13/16"	5-3/4"	4-7/8"	1	449.9
ALLS9CG	3-1/2"	15-5/8"	7-11/16"	6"	1	1041.9
ALLS10CG	4"	15-5/8"	7-11/16"	6"	1	1000.0



CONDUIT BODIES


Aluminum Die Cast Set Screw LR Conduit Bodies For EMT conduit

Application:
To provide access to
conductors for pulling, splicing
and maintenance.


Features:
• Suitable for use in concrete

Standard Materials:
Die cast aluminum
Copper free
Steel screws

**Applicable Third Party
Standards:**
UL Standard: 514A
Fed. Spec. W-C-586D
NEMA: FB-1



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
ALRS1	1/2"	4-5/16"	2-1/16"	1-3/8"	100	23.4
ALRS2	3/4"	5-1/16"	2-1/4"	1-5/8"	50	38.6
ALRS3	1"	5-7/8"	2-5/8"	1-7/8"	25	50.4
ALRS4	1-1/4"	7-13/16"	3-5/8"	2-1/2"	10	101.5
ALRS5	1-1/2"	7-13/16"	3-5/8"	2-1/2"	10	97.2
ALRS6	2"	10-1/16"	4-7/16"	3-3/8"	5	262.4
ALRS7	2-1/2"	12-13/16"	5-3/4"	4"	1	366.2
ALRS8	3"	12-13/16"	5-3/4"	4-1/2"	1	406.3
ALRS9	3-1/2"	15-5/8"	7-11/16"	5-5/8"	1	928.1
ALRS10	4"	15-5/8"	7-11/16"	5-5/8"	1	901.7



Aluminum Die Cast Set Screw LR Conduit Bodies with
Stamped Aluminum Cover & Neoprene Gasket

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
ALRS1CG	1/2"	4/5/16"	2-1/16"	1-5/8"	100	29.8
ALRS2CG	3/4"	5-1/16"	2-1/4"	1-7/8"	50	46.5
ALRS3CG	1"	5-7/8"	2-5/8"	2-1/8"	25	60.8
ALRS4CG	1-1/4"	7-13/16"	3-5/8"	2-3/4"	10	121.3
ALRS5CG	1-1/2"	7-13/16"	3-5/8"	2-3/4"	10	116.9
ALRS6CG	2"	10-1-16"	4-7/16"	3-5/8"	5	295.8
ALRS7CG	2-1/2"	12-13/16"	5-3/4"	4-3/8"	1	424.9
ALRS8CG	3"	12-13/16"	5-3/4"	4-7/8"	1	465.0
ALRS9CG	3-1/2"	15-5/8"	7-11/16"	6"	1	1046.3
ALRS10CG	4"	15-5/8"	7-11/16"	6"	1	1019.9



CONDUIT BODIES


Aluminum Die Cast Set Screw T Conduit Bodies For EMT conduit

Application:
To provide access to
conductors for pulling, splicing
and maintenance.


Features:
• Suitable for use in concrete

Standard Materials:
Die cast aluminum
Copper free
Steel screws

**Applicable Third Party
Standards:**
UL Standard: 514A
Fed. Spec. W-C-586D
NEMA: FB-1

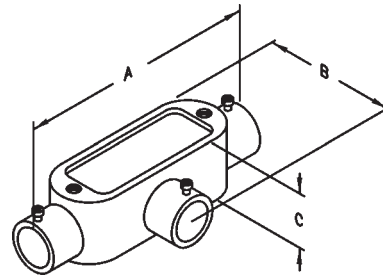

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
ATS1	1/2"	4-3/4"	2-1/16"	1-3/8"	100	23.9
ATS2	3/4"	5-9/16"	2-1/4"	1-5/8"	50	38.6
ATS3	1"	6-7/16"	2-5/8"	1-7/8"	25	55.2
ATS4	1-1/4"	8-1/4"	3-9/16"	2-1/2"	10	103.4
ATS5	1-1/2"	8-3/8"	3-9/16"	2-1/2"	10	101.0
ATS6	2"	10-11/16"	4-3/8"	3-1/8"	5	273.7
ATS7	2-1/2"	13-1/4"	4"	5-3/4"	1	374.8
ATS8	3"	13-1/4"	4-1/2"	5-3/4"	1	444.2
ATS9	3-1/2"	16-1/8"	5-5/8"	7-11/16"	1	1146.4
ATS10	4"	16-1/8"	5-5/8"	7-11/16"	1	1079.2



Aluminum Die Cast Set Screw T Conduit Bodies with
Stamped Aluminum Cover & Neoprene Gasket

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
ATS1CG	1/2"	4-3/4"	2-1/16"	1-5/8"	100	30.5
ATS2CG	3/4"	5-9/16"	2-1/4"	1-7/8"	50	46.5
ATS3CG	1"	6-7/16"	2-5/8"	2-1/8"	25	65.2
ATS4CG	1-1/4"	8-1/4"	3-9/16"	2-3/4"	10	123.2
ATS5CG	1-1/2"	8-3/8"	3-9/16"	2-3/4"	10	120.8
ATS6CG	2"	10-11/16"	4-3/8"	3-5/8"	5	307.2
ATS7CG	2-1/2"	13-1/4"	4"	6-1/8"	1	433.5
ATS8CG	3"	13-1/4"	4-1/2"	6-1/8"	1	502.9
ATS9CG	3-1/2"	16-1/8"	5-5/8"	8-1/16"	1	1264.6
ATS10CG	4"	16-1/8"	5-5/8"	8-1/16"	1	1197.4



CONDUIT BODIES


Aluminum Conduit Body Covers & Gaskets For Rigid • EMT • IMC conduit

Application:
To cover conduit body opening.

Features:
• Captive steel screws


Standard Materials:
Die cast aluminum
Stamped aluminum
Steel screws
Neoprene rubber gasket

Applicable Third Party
Standards:
UL Standard: 514A
Fed. Spec. W-C-586D
NEMA: FB-1




Aluminum Die Cast Conduit Body Covers

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
C1-DC	1/2"	3-7/8"	1-5/16"	1/4"	250	4.7
C2-DC	3/4"	4-11/16"	1-9/16"	1/4"	250	6.3
C3-DC	1"	5-3/8"	1-3/4"	1/4"	250	10.0
C4-DC	1-1/4" - 1-1/2"	7-5/16"	2-1/2"	1/4"	250	18.7
C5-DC	2"	9-1/2"	3-1/8"	5/16"	25	37.5
C6-DC	2-1/2" - 3"	12-1/16"	4-7/16"	3/8"	10	65.0
C7-DC	3-1/2" - 4"	15-1/16"	5-9/16"	3/8"	5	110.0



Stamped Aluminum Conduit Body Covers

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
C1-AL	1/2"	3-7/8"	1-5/16"	3/16"	250	3.8
C2-AL	3/4"	4-11/16"	1-9/16"	3/16"	250	5.1
C3-AL	1"	5-3/8"	1-3/4"	3/16"	250	6.6
C4-AL	1-1/4" - 1-1/2"	7-5/16"	2-1/2"	3/16"	250	12.6
C5-AL	2"	9-1/2"	3-1/8"	3/16"	25	19.9
C6-AL	2-1/2" - 3"	12-3/16"	4-1/2"	3/16"	10	50.8
C7-AL	3-1/2" - 4"	14-15/16"	5-1/2"	3/16"	5	67.9



Neoprene Rubber Conduit Body Gasket

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
NG1	1/2"	3-7/8"	1-5/16"	100	2.5
NG2	3/4"	4-11/16"	1-9/16"	100	3.1
NG3	1"	5-3/8"	1-3/4"	50	3.2
NG4	1-1/4" - 1-1/2"	7-5/16"	2-1/2"	50	6.2
NG5	2"	9-1/2"	3-1/8"	25	10.9
NG6	2-1/2" - 3"	12-1/8"	4-1/2"	10	12.5
NG7	3-1/2" - 4"	15"	5-1/2"	10	29.7





MISCELLANEOUS FITTINGS:

Fixture Hangers
Conduit Beam Clamps
Sealing Gaskets
Lay-In Grounding Lugs

MISCELLANEOUS

Sealing Gaskets with Self Retaining Neoprene Rubber Gaskets

Application:

To form a rain tight seal between a conduit fitting and the outside of a box.

Features:

- Neoprene rubber gasket
- Steel retaining ring
- Stainless Steel retaining ring

Standard Materials:

Rubber gaskets
Steel rings

Standard Finish:

Zinc plated


Applicable Third Party

Standards:

UL Standard: 514B


Fed. Spec. W-F-408E

NEMA: FB-1



Sealing Gaskets with Steel Retaining Ring

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
SG-50	1/2"	1-1/8"	13/16"	3/16"	1000	1.3
SG-75	3/4"	1-3/8"	1-1/8"	3/16"	500	1.5
SG-100	1"	1-5/8"	1-5/16"	3/16"	500	1.9
SG-125	1-1/4"	2"	1-5/8"	3/16"	250	2.5
SG-150	1-1/2"	2-1/4"	1-7/8"	3/16"	200	2.6
SG-200	2"	2-3/4"	2-5/16"	3/16"	200	3.1
SG-250	2-1/2"	3-1/2"	2-7/8"	3/16"	100	6.3
SG-300	3"	4-1/4"	3-1/2"	3/16"	50	9.4
SG-350	3-1/2"	4-3/4"	4"	3/16"	50	9.5
SG-400	4"	5-3/16"	4-1/2"	3/16"	50	12.5
SG-500	5"	6-9/16"	5-9/16"	3/16"	50	15.6
SG-600	6"	7-3/4"	6-5/8"	3/16"	50	18.8



Sealing Gaskets with Stainless Steel Retaining Ring

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
SGS-50	1/2"	1-1/8"	13/16"	3/16"	1000	1.3
SGS-75	3/4"	1-3/8"	1-1/8"	3/16"	500	1.5
SGS-100	1"	1-5/8"	1-5/16"	3/16"	500	1.9
SGS-125	1-1/4"	2"	1-5/8"	3/16"	250	2.5
SGS-150	1-1/2"	2-1/4"	1-7/8"	3/16"	200	2.6
SGS-200	2"	2-3/4"	2-5/16"	3/16"	200	3.1

^ Not UL Listed



MISCELLANEOUS

Carbon Steel Hangers


Features:

- HCS Furnished With Nut & Bolt
- HCST extruded and threaded hole
- Used on RMC, IMC, EMT, Rigid PVC Conduits

Standard Materials:
Carbon Steel


Standard Finish:
Zinc plated

Applicable Third Party
Standards:
UL 2239



Carbon Steel Hangers with Nut and Bolt

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	LOAD RATING	PCS/UNITS PER BOX	BOLT SIZE	WEIGHT PER C
HCS0	1/2"	1-7/8"	13/16"	50 LBS.	100	1/4-20	8.1
HCS1	3/4"	2-3/16"	1"	50 LBS.	100	1/4-20	8.8
HCS2	1"	2-7/16"	1-1/4"	60 LBS.	100	1/4-20	10.6
HCS25	1-1/4" EMT	2-7/8"	1-1/2"	75 LBS.	100	1/4-20	12.5
HCS3	1-1/2" EMT - 1-1/4" RIGID	3-3/8"	1-11/16"	80 LBS.	100	1/4-20	15.0
HCS4	1-1/2" RIGID	3-3/8"	1-15/16"	80 LBS.	100	1/4-20	15.6
HCS5	2"	3-7/8"	2-5/16"	100 LBS.	50	1/4-20	18.8
HCS6	2-1/2"	4-9/16"	2-7/8"	125 LBS.	50	5/16-18	34.4
HCS7	3"	5-1/2"	3-1/2"	165 LBS.	25	5/16-18	40.0
HCS8	3-1/2"	5-13/16"	4"	200 LBS.	10	5/16-18	42.5
HCS9	4"	6-5/16"	4-1/2"	230 LBS.	10	5/16-18	45.0



Carbon Steel Hangers with Extruded Hole and Bolt

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	LOAD RATING	PCS/UNITS PER BOX	BOLT SIZE	WEIGHT PER C
HCST0	1/2"	1-7/8"	13/16"	50 LBS.	100	1/4-20	6.2
HCST1	3/4"	2-3/16"	1"	50 LBS.	100	1/4-20	6.6
HCST2	1"	2-7/16"	1-1/4"	60 LBS.	100	1/4-20	8.4
HCST25	1-1/4" EMT	2-7/8"	1-1/2"	75 LBS.	100	1/4-20	10.2
HCST3	1-1/2" EMT - 1-1/4" RIGID	3-3/8"	1-11/16"	80 LBS.	100	1/4-20	14.2
HCST4	1-1/2" RIGID	3-3/8"	1-15/16"	80 LBS.	100	1/4-20	15.1
HCST5	2"	3-7/8"	2-5/16"	100 LBS.	50	1/4-20	16.9



MISCELLANEOUS

Stainless Steel Hangers


Features:

- Furnished With Nut & Bolt
- Used on RMC, IMC, EMT, Rigid PVC Conduits

Standard Materials:
Stainless Steel

Standard Finish:
Stainless Steel

Applicable Third Party
Standards:
UL 2239



CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	LOAD RATING	PCS/UNITS PER BOX	BOLT SIZE	WEIGHT PER C
HSS0	1/2"	1-7/8"	13/16"	50 LBS.	100	1/4-20	6.6
HSS1	3/4"	2-3/16"	1"	50 LBS.	100	1/4-20	8.1
HSS2	1"	2-7/16"	1-1/4"	60 LBS.	100	1/4-20	10.0
HSS25	1-1/4" EMT	2-7/8"	1-1/2"	75 LBS.	100	1/4-20	12.5
HSS3	1-1/2" EMT - 1-1/4" RIGID	3-3/8"	1-11/16"	80 LBS.	100	1/4-20	15.0
HSS4	1-1/2" RIGID	3-3/8"	1-15/16"	80 LBS.	100	1/4-20	15.6
HSS5	2"	3-7/8"	2-5/16"	100 LBS.	50	1/4-20	18.1
HSS6	2-1/2"	4-9/16"	2-7/8"	125 LBS.	50	5/16-18	35.0
HSS7	3"	5-1/2"	3-1/2"	165 LBS.	25	5/16-18	40.6
HSS8	3-1/2"	5-13/16"	4"	200 LBS.	10	5/16-18	43.1
HSS9	4"	6-5/16"	4-1/2"	230 LBS.	10	5/16-18	46.9



MISCELLANEOUS

Conduit Beam Clamps, Malleable Iron

Features:

- Steel bolt - Case hardened
- Standard sizes 3/4" - 2 1/2"
- Jaw opening 9/16" - 1 1/4"

Standard Materials:

Malleable iron
^ Steel


Standard Finish:

Zinc plated

Applicable Third Party

Standards:

UL Standard: 2239

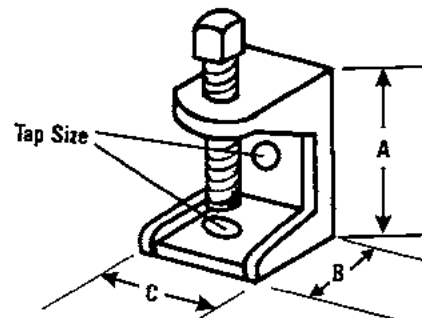

CATALOG NUMBER	TRADE SIZE	TAP SIZE	JAW OPENING	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PERC
BC75-1	3/4"	10 - 24	9/16"	1-1/4"	1-1/8"	7/8"	400	15.7
BC75-2	3/4"	1/4 - 20	9/16"	1-1/4"	1-1/8"	7/8"	400	15.7
BC100-1	1"	10 - 24	3/4"	1-3/8"	1-3/8"	1-3/16"	320	24.0
BC100-2	1"	1/4 - 20	3/4"	1-3/8"	1-3/8"	1-3/16"	320	24.0
BC150	1-1/2"	5/16 - 18	11/16"	1-9/16"	1-1/2"	1-7/16"	210	34.7
BC200-1	2"	3/8 - 16	7/8"	1-13/16"	1-13/16"	1-15/16"	120	52.9
BC200-2	2"	3/8 - 16	7/8"	1-13/16"	1-13/16"	1-15/16"	120	52.9
BC250	2-1/2"	1/2 - 13	1-1/4"	2-1/4"	2-5/16"	2-9/16"	54	117.9
^ BC75-2-ST	3/4"	1/4-20	3/4"	1-3/8"	1-9/16"	15/16"	400	15.0

^ UL Listing not applicable to these sizes

CATALOG NUMBER	TRADE SIZE	SCREW SIZE	LOAD RATING, LBS
BC75-1	3/4"	1/4-20	50
BC75-2	3/4"	1/4 - 20	50
BC100-1	1"	5/16 - 18	60
BC100-2	1"	5/16 - 18	60
BC150	1-1/2"	3/8 - 16	80
BC200-1	2"	3/8 - 16	100
BC200-2	2"	1/2 - 13	100
BC250	2-1/2"	1/2 - 13	200
BC75-2-ST	3/4"	5/16 - 18	N/A



MISCELLANEOUS

Lay-in Grounding Lugs

Features:


- Each lug takes a range of cable sizes
- Heavy duty slotted or hex head screw
- Aluminum layin lugs are suitable for use with copper or aluminum conductors
- Copper layin lugs are suitable for use with copper or aluminum conductors

Standard Materials:
Aluminum or
Copper

Standard Finish:
Aluminum Lug - Zinc plated
Copper Lug - Natural

Applicable Third Party
Standards:
UL Standard: 467
Fed. Spec. W-F-408E
NEMA: FB-1



* UL Listed
^ Not UL Certified



4/14AL and 1/0-8AL furnished with slotted screw. 3/0-6AL and 250MCM-6AL furnished with hex head screw

Aluminum Lugs

CATALOG NUMBER	LUG SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
* 4-14AL	4-14	1-1/16"	3/8"	3/4"	1500	1.9
* 1/0-8AL	1/0-8	1-1/2"	5/8"	1-1/8"	480	6.6
* 3/0-6AL	3/0-6	2"	13/16"	1-1/2"	198	16.4
^ 250MCM-6AL	250MCM-6	2-3/16"	13/16"	1-11/16"	180	18.8



4/14CL and 1/0-8CL furnished with slotted screw. 3/0-6CL and 250MCM-6CL furnished with hex head screw

Copper Lugs

CATALOG NUMBER	LUG SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
* 4-14CL	4-14	1-1/16"	3/8"	3/4"	720	4.4
* 1/0-8CL	1/0-8	1-1/2"	5/8"	1-1/8"	200	15.9
* 3/0-6CL	3/0-6	2"	13/16"	1-1/2"	84	40.0
^ 250MCM-6CL	250MCM-6	2-3/16"	13/16"	1-11/16"	72	50.3



MISCELLANEOUS

Cable Tray Grounding Conductor Clamp

Application:

Designed for use in heavy industrial applications. Provides a means for securely attaching a grounding conductor to cable tray to maintain grounding continuity for the entire cable tray system. Provides protection of equipment through a reliable method for carrying ground fault currents. Installation indoors or outdoors, with most types of cable trays with inside or outside flanges.

Features:

- Meets UL and NEC code requirements
- Quick and easy installation - low installed cost. No drilling or special tools required.
- Accommodates solid (where suitable) or stranded aluminum or copper grounding conductors in sizes from #6 to 2/0

Standard Materials:


Body - Malleable iron
Set screws - Steel

Standard Finish:

Electrogalvanized

Applicable Third Party Standards:

UL 467

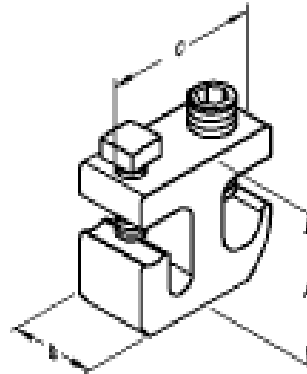

CATALOG NUMBER	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
TGC40	1-13/16"	7/8"	1-7/8"	20	51.3



MISCELLANEOUS

Fixture Hangers

Application:
For use in commercial or light industrial applications


Features:

- For use with 1/2" or 3/4" fixture conduit stems
- Available for use with round or square boxes
- Easily attached by 2 screws
- Suitable for damp locations
- Support of 50-lb fixture/luminaire

Standard Materials:
Steel
Malleable iron

Standard Finish:
Zinc plated

Applicable Third Party Standards:
UL Standard: 514A, 514B, 514D
Fed. Spec. W-F-408E
NEMA: FB-1

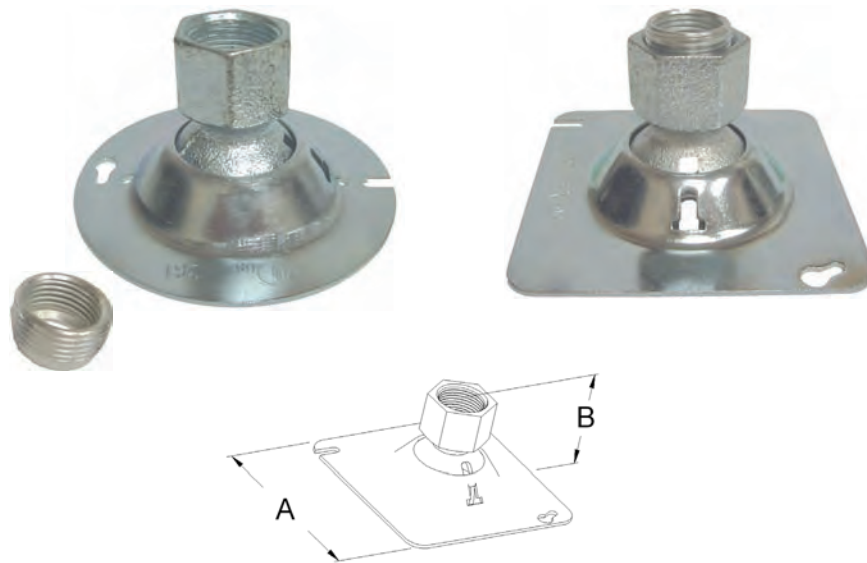

CATALOG NUMBER	DIA.	DIM A	DIM B	PCS/UNITS PER BOX	WEIGHT PER C
FHR50-75	4-1/8"	X	2-3/16"	36	75.0
FHS50-75	X	4-1/8"	2-3/16"	36	81.3



MISCELLANEOUS

Ceiling Fan Box


Features:

- Fan Support Weight 35 lbs
- Fixture Support Weight 150 lbs
- Combination Head Mounting
- Screws & NM Cable Connector come Polybagged
- Plastic Cap Included

Standard Materials:
Carbon Steel

Standard Finish:
Zinc plated

Applicable Third Party
Standards:
UL Standard: 514A

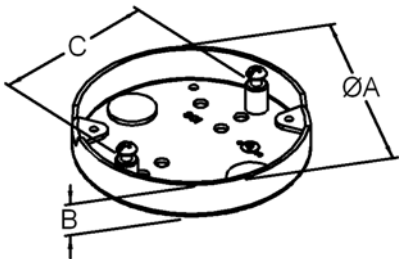

CATALOG NUMBER	KO SIZE	DIM A	DIM B	DIM C	PCS/UNITS PER BOX	WEIGHT PER C
STP261	2 - 1/2"	4-1/4"	3/4"	3-1/4"	24	62.5



Products:

EMT FITTINGS

EMT Set Screw Connectors and Couplings	1 - 4
EMT Compression Connectors and Couplings	5 - 6
Raintight Compression Connectors and Couplings	7 - 8
Raintight Compression Space Saver Connectors	9
Set Screw Space Saver Connectors	10 - 11
Compression Space Saver Connectors	12
Combination Couplings	13
Twistlock Set Screw Connectors	14
Twistlock Outlet Boxes	15
Bendsaver Conduit Straps and Die Cast Couplings	16 -17
One & Two-Hole Straps	18
90° & 45° Set Screw Coupling Elbows	19
90° & 45° Elbows	20

RIGID FITTINGS

Insulated and Non-Insulated Threaded Conduit Bushings	21
Insulated Threaded Grounding Bushings with Aluminum Lugs	22
Insulated Threaded Grounding Bushings with Copper Lugs	23
Insulated and Non-Insulated Threadless Conduit Bushings ..	24
Insulated Threadless Grounding Bushing with Aluminum Lugs...	25
Insulated Threadless Grounding Bushing with Copper Lugs	26
Insulated Bushing	27
Three Piece Couplings	28
Split Couplings	29
Conduit Hubs with Insulated Throats	30
Pull Elbows	31
Offset Conduit Nipples	32
Compression Connectors for Threadless Conduit	33
Compression Couplings for Threadless Conduit	34
Raintight Compression Connectors for Threadless Conduit	35
Raintight Compression Couplings for Threadless Conduit	36
Raintight Set Screw Connectors for Threadless Conduit	37

RIGID FITTINGS cont'd

Raintight Set Screw Couplings for Threadless Conduit	38
FS & FD Cast Device Boxes	39
FS & FD Cast Device Box Covers & Gaskets	40 - 41
Conduit Nipples	42 - 43
Reducing Bushings	44
Steel Nail Straps	45
One & Two-Hole Straps	46 - 47
Clamp Back Spacers	48
J-Clamp	49
Right Angle Conduit Clamps & U-Bolts	50
Edge Type and Parallel Conduit Clamps	51
Threaded Conduit Nipples	52 - 56
Threaded Conduit Coupling	57
90° & 45 Elbows	58

LIQUIDTIGHT FITTINGS

Straight Connectors	60
Straight Connectors and External Aluminum Grounding Lugs..	61
Striaght Connectors w/Insulated Throats and Aluminum Lugs.	62
Straight Connectors w/Insulated Throats and Copper Lugs ..	63
45° Connectors	64
45° Connectors and External Aluminum Grounding Lugs....	65
45° Connectors w/Insulated Throats and Copper Lugs	66
90° Connectors	67
90° Connectors and External Aluminum Grounding Lugs....	68
90° Connectors W/Insulated Throats and Copper Lugs	69
Screw On Straight Liquidtight Connectors	70 - 71
45° Screw On Liquidtight Connectors	72
90° Screw On Liquidtight Connectors	73
Stainless Steel Straight, 90° & 45° Connectors.....	74

LIQUIDTIGHT FITTINGS cont'd

Tubular Steel Connectors	75
Raintight Tubular Steel Connectors	76
Space Saver Straight Connectors	77
Combination Coupling for Connecting Liquidtight to Rigid	78
Wire Mesh Grips	79
Wire Mesh Grips with Insulated Throat Liquidtight	80
Wire Mesh Grips with Insulated Throat Liquidtight 45°... ..	81
Wire Mesh Grips with Insulated Throat Liquidtight 90° ..	82
Steel Ferrules	83
Steel Ferrules for Screw On Liquidtight	84

FLEX - AC - MC FITTINGS

Squeeze Connectors	85
45° Squeeze Connectors	86
90° Squeeze Connectors	87
3/8" Squeeze, Duplex Squeeze and 90° Duplex Squeeze Connectors	88
Squeeze Connector Cable Selection Guide	89
Combination Coupling for Connecting Flex to Rigid	90
Quicklock Type Connectors with Insulated Throats	91
Double Bite Connectors with Insulated Throats	92
45° Double Bite Connectors with Insulated Throats	93
90° Double Bite Connectors with Insulated Throats	94
Double Bite Compression Couplings	95
Double Bite Set Screw Couplings	96
Space Saver Double Bite Connectors	97

CORD GRIP FITTINGS

Color Coded Cord Grip Connectors	98
Color Coded 45° Cord Grip Connectors	99
Color Coded 90° Cord Grip Connectors	100
Cord Connector for Non-Metallic Sheathed Cable	101

CONDUIT BODIES

Watertight Malleable Iron Rigid Conduit Bodies with Stamped Steel Covers & Neoprene Gaskets	102 - 105
Raised Dome Stamped Steel Cover & Neoprene Gasket	105
Malleable Iron Rigid Conduit Bodies	106 - 109
Malleable Iron Rigid Conduit Bodies with Rollers	110
Raised Dome Stamped Steel Conduit Body Covers	111
Malleable Iron Conduit Body Covers	112
Watertight Aluminum Die Cast Threaded Conduit Bodies with Raised Dome Aluminum Cover & Neoprene Gaskets	113 - 116
Raised Dome Stamped Aluminum Cover & Neoprene Gasket ..	116
Aluminum Die Cast Threaded Conduit Bodies with Stamped Aluminum Cover & Neoprene Gaskets	117 - 123
Aluminum Die Cast Combination Conduit Bodies with Stamped Aluminum Cover & Neoprene Gasket	124 - 128
Aluminum Die Cast Set Screw Conduit Bodies with Stamped Aluminum Cover & Neoprene Gasket	129 - 134
Aluminum Conduit Body Covers & Gaskets	135

MISCELLANEOUS

Sealing Gaskets with Self Retaining Neoprene Gaskets	136
Carbon Steel Hangers	137
Stainless Steel Hangers	138
Malleable Iron Conduit Beam Clamps	139
Lay-in Grounding Lugs	140
Cable Tray Grounding Clamp	141
Fixture Hangers	142
Ceiling Fan Box	143